




GROUP 2 SPECIFICATION

1. MAJOR COMPONENT (HL757-9A, HL757XTD-9A)

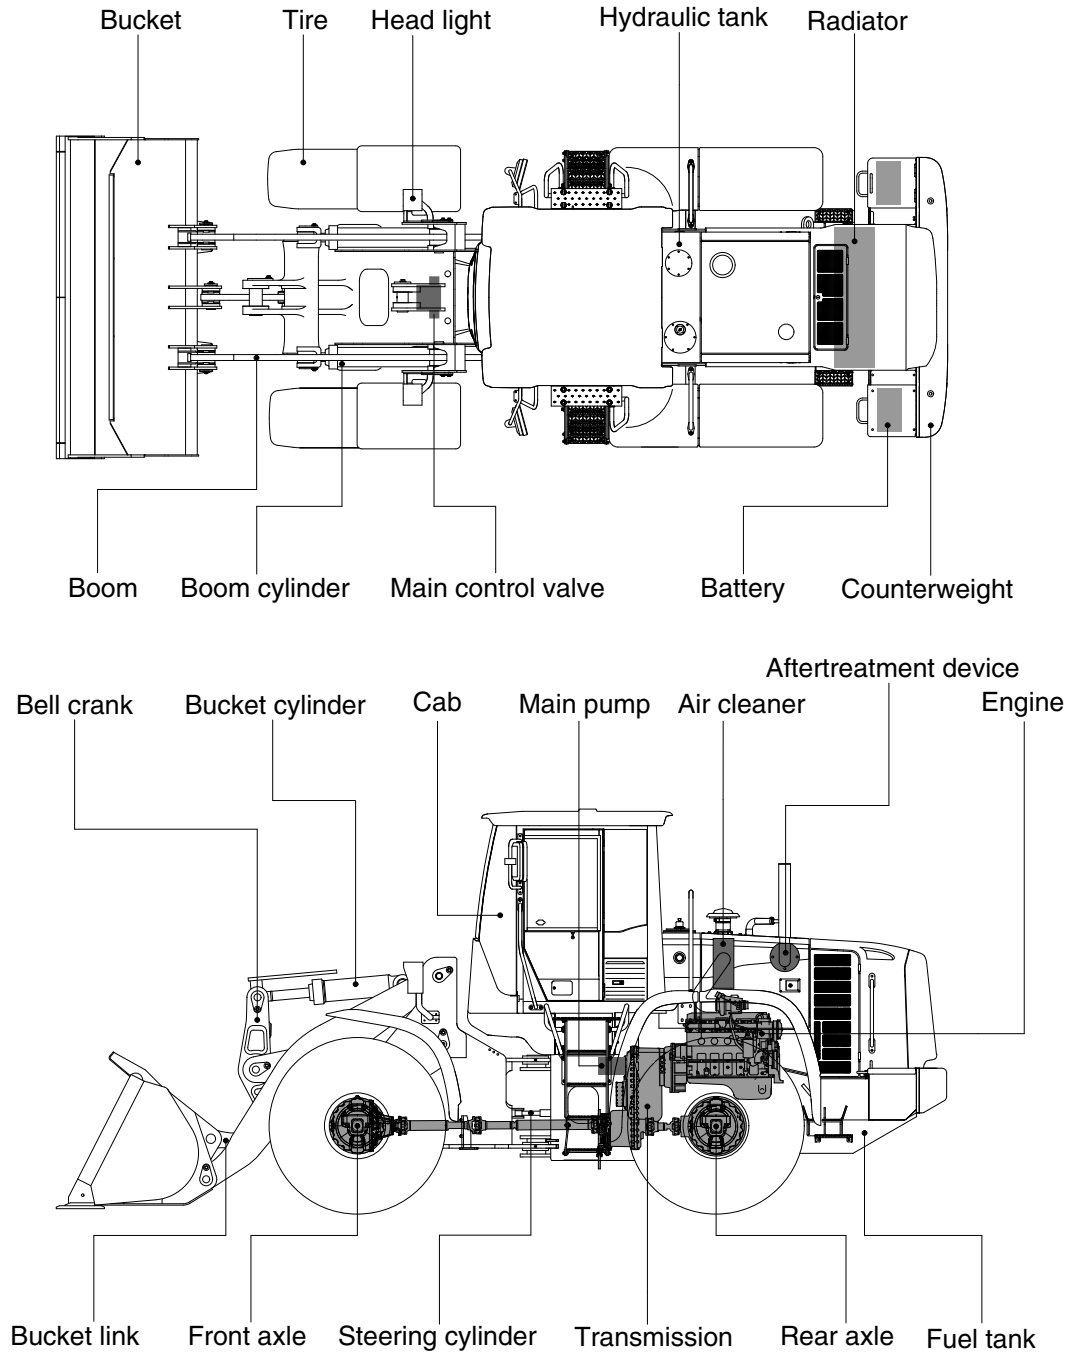

7609A2SE01


MAJOR COMPONENT (HL757TM-9A)

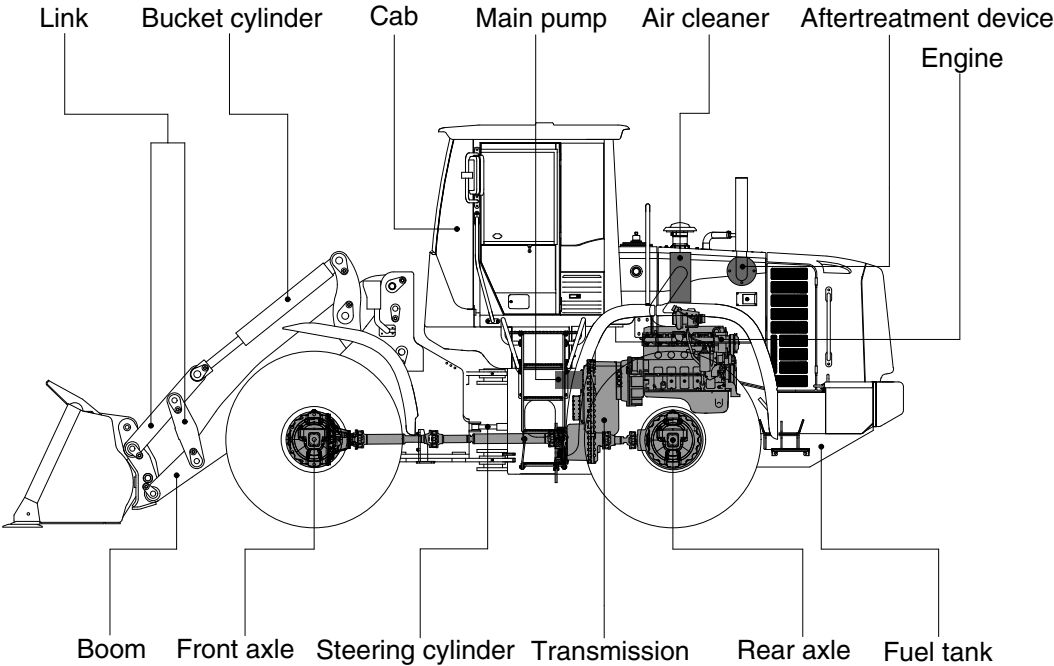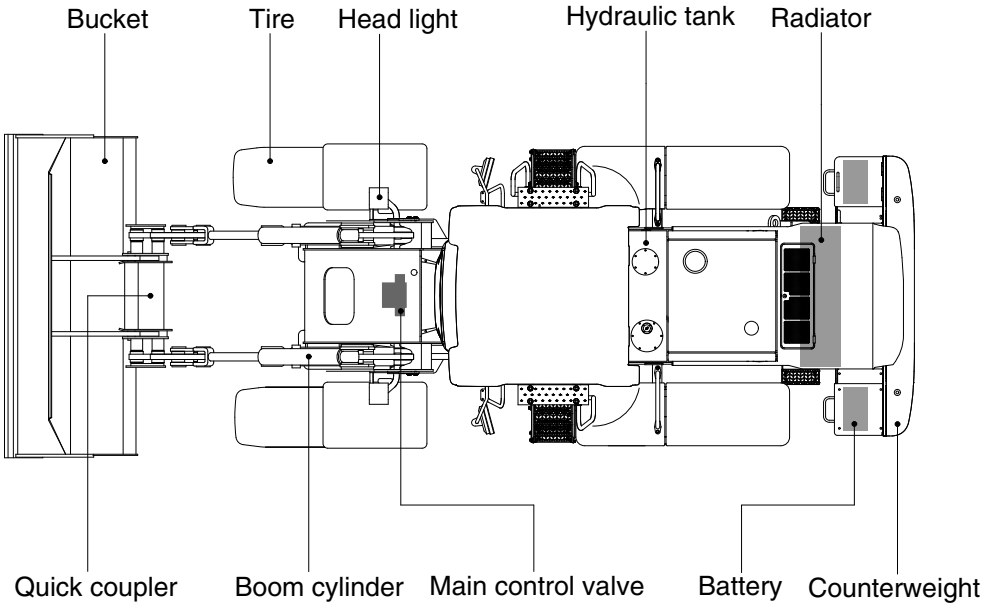

757TM9A2SE01

2. SPECIFICATIONS


1) WITH BOLT-ON CUTTING EDGE TYPE BUCKET (HL757-9A)

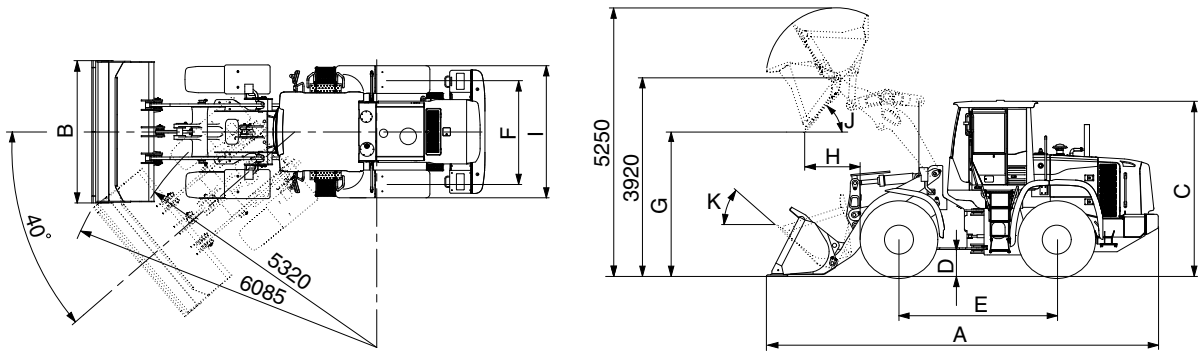

7579A2SE03

Description		Unit	Specification	
Operating weight		kg (lb)	14700 (32400)	
Bucket capacity	Struck	m ³ (yd ³)	2.4 (3.1)	
	Heaped		2.8 (3.7)	
Overall length	A	mm (ft-in)	7580 (24' 10")	
Overall width	B		2740 (9' 0")	
Overall height	C		3310 (10' 10")	
Ground clearance	D		410 (1' 4")	
Wheelbase	E		3050 (10' 0")	
Tread	F		2050(6' 9")	
Dump clearance at 45°	G		2840 (9' 4")	
Dump reach (full lift)	H		1070 (3' 6")	
Width over tires	I		2580 (8' 6")	
Dump angle	J		degree (°)	47
Roll back angle (carry position)	K			48
Cycle time	Lift (with load)	sec	5.9	
	Dump (with load)		1.1	
	Lower (empty)		3.8	
Maximum travel speed		km/hr (mph)	38.5 (24.0)	
Braking distance		m (ft-in)	12 (39' 4")	
Minimum turning radius (center of outside tire)			5.32 (17' 5")	
Gradeability		degree (°)	30	
Breakout force		kg (lb)	12530 (27620)	
Travel speed	Forward	First gear	6.9 (4.3)	
		Second gear	11.4 (7.1)	
		Third gear	23.0 (14.3)	
		Fourth gear	38.5 (24.0)	
	Reverse	First gear	7.3 (4.5)	
		Second gear	12.1 (7.5)	
Third gear		24.2 (15)		


WITH BOLT-ON CUTTING EDGE TYPE BUCKET (HL757XTD-9A)

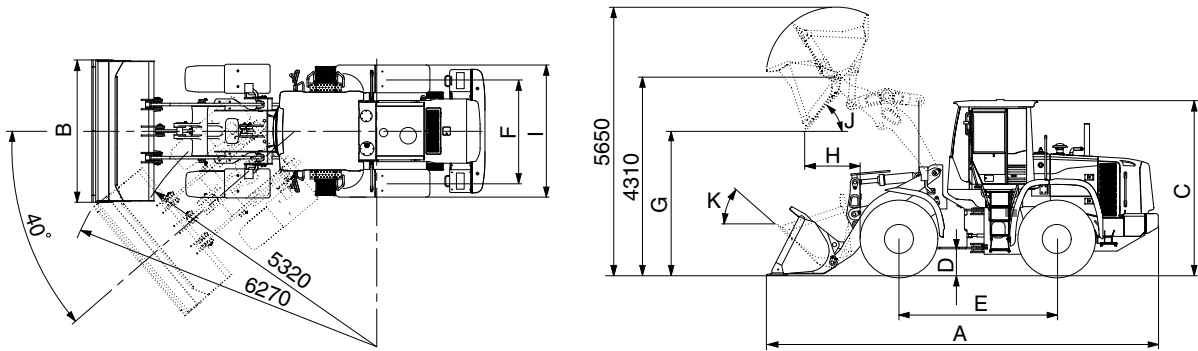

7579A2SE03-1

Description		Unit	Specification	
Operating weight		kg (lb)	15200 (33500)	
Bucket capacity	Struck	m ³ (yd ³)	2.4 (3.1)	
	Heaped		2.8 (3.7)	
Overall length	A	mm (ft-in)	7990 (26' 3")	
Overall width	B		2740 (9' 0")	
Overall height	C		3310 (10' 10")	
Ground clearance	D		410 (1' 4")	
Wheelbase	E		3050 (10' 0")	
Tread	F		2050 (6' 9")	
Dump clearance at 45°	G		3230 (10' 7")	
Dump reach (full lift)	H		1100 (3' 7")	
Width over tires	I		2580 (8' 6")	
Dump angle	J		degree (°)	47
Roll back angle (carry position)	K			50
Cycle time	Lift (with load)	sec	5.9	
	Dump (with load)		1.1	
	Lower (empty)		3.8	
Maximum travel speed		km/hr (mph)	38.5 (24.0)	
Braking distance		m (ft-in)	12 (39' 4")	
Minimum turning radius (center of outside tire)			5.32 (17' 5")	
Gradeability		degree (°)	30	
Breakout force		kg (lb)	12420 (27380)	
Travel speed	Forward	First gear	6.9 (4.3)	
		Second gear	11.4 (7.1)	
		Third gear	23.0 (14.3)	
		Fourth gear	38.5 (24.0)	
	Reverse	First gear	7.3 (4.5)	
		Second gear	12.1 (7.5)	
Third gear		24.2 (15.0)		


WITH BOLT-ON CUTTING EDGE TYPE BUCKET (HL757TM-9A)

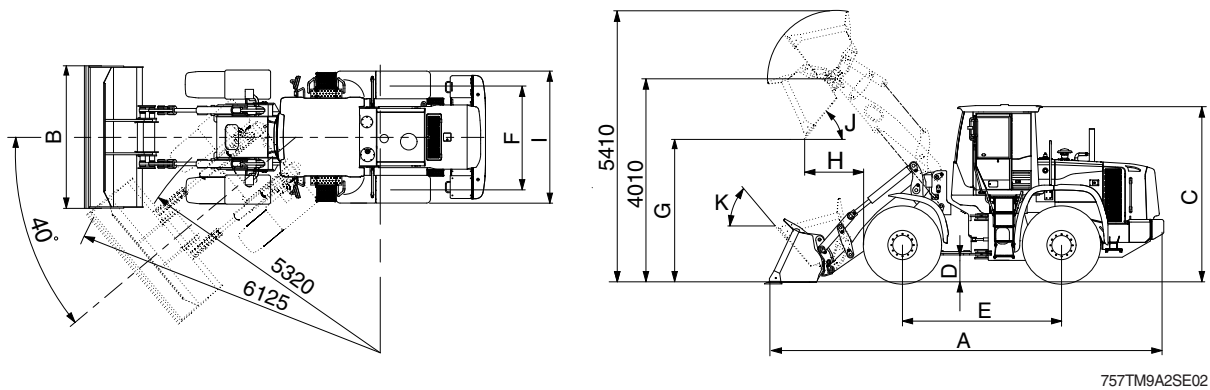

757TM9A2SE02

Description		Unit	Specification	
Operating weight		kg (lb)	15200 (33500)	
Bucket capacity	Struck	m ³ (yd ³)	2.1 (2.7)	
	Heaped		2.5 (3.3)	
Overall length	A	mm (ft-in)	7670 (25' 2")	
Overall width	B		2740 (9' 0")	
Overall height	C		3310 (10' 10")	
Ground clearance	D		410 (1' 4")	
Wheelbase	E		3050 (10' 0")	
Tread	F		2050 (6' 9")	
Dump clearance at 45°	G		2840 (9' 4")	
Dump reach (full lift)	H		1315 (4' 4")	
Width over tires	I		2580 (8' 6")	
Dump angle	J		degree (°)	50
Roll back angle (carry position)	K			54
Cycle time	Lift (with load)	sec	5.9	
	Dump (with load)		1.8	
	Lower (empty)		3.7	
Maximum travel speed		km/hr (mph)	38.5 (23.9)	
Braking distance		m (ft-in)	12 (39' 4")	
Minimum turning radius (center of outside tire)			5.32 (17' 5")	
Gradeability		degree (°)	30	
Breakout force		kg (lb)	12800 (28220)	
Travel speed	Forward	First gear	6.9 (4.3)	
		Second gear	11.4 (7.1)	
		Third gear	23.0 (14.3)	
		Fourth gear	38.5 (23.9)	
	Reverse	First gear	7.3 (4.5)	
		Second gear	12.1 (7.5)	
Third gear		24.3 (15.1)		


2) WITH TOOTH TYPE BUCKET (HL757-9A)

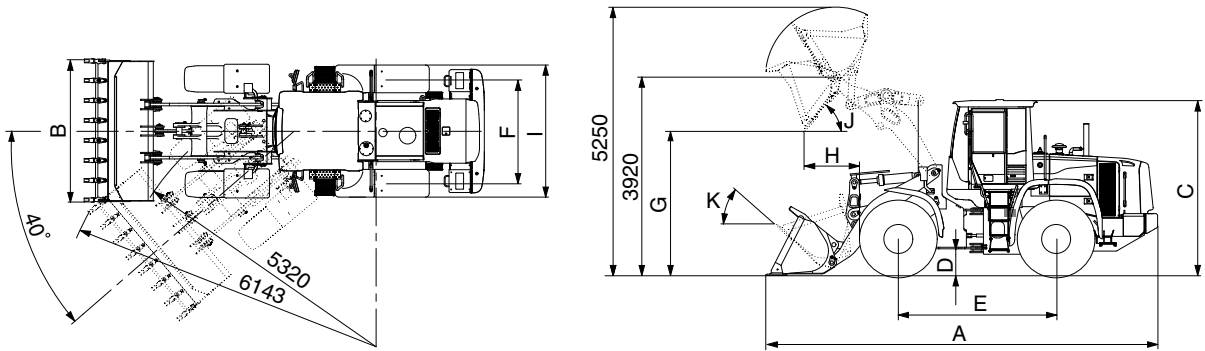

7579A2SE02

Description		Unit	Specification	
Operating weight		kg (lb)	14600 (32190)	
Bucket capacity	Struck	m ³ (yd ³)	2.2 (2.9)	
	Heaped		2.6 (3.4)	
Overall length	A	mm (ft-in)	7680 (25' 2")	
Overall width	B		2790 (9' 2")	
Overall height	C		3310 (10' 10")	
Ground clearance	D		410 (1' 4")	
Wheelbase	E		3050 (10' 0")	
Tread	F		2050 (6' 9")	
Dump clearance at 45°	G		2750 (9' 1")	
Dump reach (full lift)	H		1150 (3' 9")	
Width over tires	I		2580 (8' 6")	
Dump angle	J		degree (°)	47
Roll back angle (carry position)	K			48
Cycle time	Lift (with load)	sec	5.9	
	Dump (with load)		1.1	
	Lower (empty)		3.8	
Maximum travel speed		km/hr (mph)	38.5 (24.0)	
Braking distance		m (ft-in)	12 (39' 4")	
Minimum turning radius (center of outside tire)			5.32 (17' 5")	
Gradeability		degree (°)	30	
Breakout force		kg (lb)	12530 (27620)	
Travel speed	Forward	First gear	6.9 (4.3)	
		Second gear	11.4 (7.1)	
		Third gear	23 (14.3)	
		Fourth gear	38.5 (24.0)	
	Reverse	First gear	7.3 (4.5)	
		Second gear	12.1 (7.5)	
Third gear		24.2 (15.0)		

WITH TOOTH TYPE BUCKET (HL757XTD-9A)

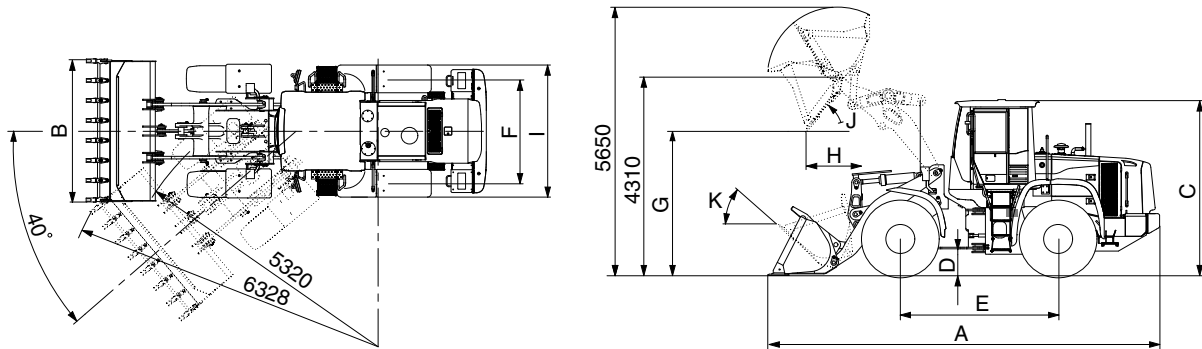

7579A2SE02-1

Description		Unit	Specification	
Operating weight		kg (lb)	15100 (33290)	
Bucket capacity	Struck	m ³ (yd ³)	2.2 (2.9)	
	Heaped		2.6 (3.4)	
Overall length	A	mm (ft-in)	8100 (26' 7")	
Overall width	B		2790 (9' 2")	
Overall height	C		3310 (10' 10")	
Ground clearance	D		410 (1' 4")	
Wheelbase	E		3050 (10' 0")	
Tread	F		2050 (6' 9")	
Dump clearance at 45°	G		3145 (10' 4")	
Dump reach (full lift)	H		1175 (3' 10")	
Width over tires	I		2580 (8' 6")	
Dump angle	J		degree (°)	47
Roll back angle (carry position)	K			50
Cycle time	Lift (with load)	sec	5.9	
	Dump (with load)		1.1	
	Lower (empty)		3.8	
Maximum travel speed		km/hr (mph)	38.5 (24.0)	
Braking distance		m (ft-in)	12 (39' 4")	
Minimum turning radius (center of outside tire)			5.32 (17' 5")	
Gradeability		degree (°)	30	
Breakout force		kg (lb)	12420 (27380)	
Travel speed	Forward	First gear	6.9 (4.3)	
		Second gear	11.4 (7.1)	
		Third gear	23.0 (14.3)	
		Fourth gear	38.5 (24.0)	
	Reverse	First gear	7.3 (4.5)	
		Second gear	12.1 (7.5)	
Third gear		24.2 (15.0)		

3. WEIGHT

Item		kg	lb
Front frame assembly	HL757-9A/HL757XTD-9A	1210	2670
	HL757TM-9A	1220	2690
Rear frame assembly		1680	3700
Front fender (LH & RH)		26	57
Counterweight	HL757-9A	490	1080
	HL757XTD-9A/TM-9A	780	1720
Cab assembly		1125	2480
Engine assembly		580	1280
Transmission assembly		500	1100
Drive shaft (front)		18	40
Drive shaft (center)		17	37
Drive shaft (rear)		11	24
Front axle (include differential)		1000	2205
Rear axle (include differential)		780	1720
Tire (20.5-25, 16PR, L3)		203	448
Hydraulic tank assembly		210	460
Fuel tank assembly		345	760
Main pump assembly		55	121
Fan & brake pump assembly		15	33
Main control valve (2/3 spool)		34/41	75/90
Steering valve (EHPS)		10	22
Boom assembly	HL757-9A	965	2130
	HL757XTD-9A	1170	2580
	HL757TM-9A	910	2010
Bell crank assembly		245	540
Quick coupler (HL757TM-9A)		245	540
Bucket link		44	100
2.5m ³ bucket, with bolt on cutting edge		1065	2350
2.8m ³ bucket, with bolt on cutting edge		1190	2620
2.6m ³ bucket, with tooth		1100	2430
Boom cylinder assembly	HL757-9A/XTD-9A	100	220
	HL757TM-9A	115	254
Bucket cylinder assembly	HL757-9A/XTD-9A	115	255
	HL757TM-9A	65	143
Steering cylinder assembly		24	53
Quick coupler cylinder assembly (HL757TM-9A)		5	11
Seat		40	88
Battery		44	97

4. SPECIFICATION FOR MAJOR COMPONENTS

1) ENGINE

Item	Specification
Model	Cummins QSB6.7
Type	4-cycle turbocharged and charge air-cooled diesel engine
Control type	Electronic control
Cooling method	Water cooling
Number of cylinders and arrangement	6 cylinders, in-line
Firing order	1-5-3-6-2-4
Combustion chamber type	Direct injection type
Cylinder bore × stroke	107 × 124 mm (4.2" × 4.9")
Piston displacement	6730 cc (410cu in)
Compression ratio	17.3 : 1
Rated horse power (Gross)	200 hp at 2200 rpm
Maximum torque at 1500 rpm	94.7 kgf · m (685 lbf · ft)
Engine oil quantity	18 l (4.8 U.S. gal)
Wet weight	519 kg(1140 lb)
High idling speed	2230 ± 50 rpm
Low idling speed	800 ± 25 rpm
Rated fuel consumption	220 g/kW · hr
Starting motor	Denso PA90L (24V-7.8kW)
Alternator	Delco Remy 24SI (24V-70Amp)
Battery	2 × 12V × 130Ah

2) MAIN PUMP

Item	Specification
Type	Variable piston pump
Capacity	50+38 cc/rev
Maximum operating pressure	280 kgf/cm ² (3980 psi)
Rated oil quantity	185 l /min (48.8 U.S.gpm / 40.6 U.K.gpm)
Maximum speed	2230 rpm

3) FAN AND BRAKE PUMP

Item	Specification
Type	Variable piston pump
Capacity	28 cc/rev
Maximum operating pressure	250 kgf/cm ² (3560 psi)
Rated oil quantity	59 l /min (15.6 U.S.gpm)
Maximum speed	2230 rpm

4) MAIN CONTROL VALVE

Item	Specification
Type	2 spool
Operating method	Hydraulic pilot assist
System pressure	280 kgf/cm ² (3980 psi)
Overload relief valve pressure	340 kgf/cm ² (4840 psi) / *300 kgf/cm ² (4270 psi)

* : Bucket dump [HL757M-9A : 150kgf/cm² (2130 psi)]

5) REMOTE CONTROL VALVE

Item	Specification	
Type	Pressure reducing type	
Operating pressure	Minimum	6.5 kgf/cm ² (92.4 psi)
	Maximum	22 kgf/cm ² (312.9 psi)
Single operation stroke	Lever	80 mm (3.4 in)

6) CYLINDER

Item		Specification
Boom cylinder	Bore dia × Rod dia × Stroke	∅ 120 × ∅ 70 × 785 mm
Bucket cylinder	Bore dia × Rod dia × Stroke	∅ 140 × ∅ 75 × 485 mm (HL757-9A, HL757XTD-9A)
Bucket cylinder	Bore dia × Rod dia × Stroke	∅ 110 × ∅ 65 × 755 mm (HL757TM-9A)
Steering cylinder	Bore dia × Rod dia × Stroke	∅ 65 × ∅ 45 × 418 mm

7) DYNAMIC POWER TRANSMISSION DEVICES

Item		Specification	
4-speed transmission (std)	Model	ZF 4WG 190	
	Type	Converter	Single-stage, single-phase
		Transmission	Full-automatic power shift
	Gear shift	Forward fourth gear, reverse third gear	
	Control	Electrical single lever type, kick-down system	
	Travel speed	See the page 2-2.	
5-speed transmission (opt)	Model	ZF 5WG210	
	Type	Converter	Single-stage, double-phase (with lock up clutch)
		Transmission	Full-automatic power shift
	Gear shift	Forward fifth gear, reverse third gear	
	Control	Electrical single lever type, kick-down system	
	Travel speed	Forward 1/2/3/4/5	6.4/11.1/17.1/26.6/40.8 km/hr
Reverse 1/2/3		6.7/11.7/28.0 km/hr	
Axle	Drive devices	4-wheel drive	
	Front	Front fixed location	
	Rear	Oscillation ± 11° of center pin-loaded	
Wheels	Tires	20.5-25, 16PR (L3)	
Brakes	Travel	Four-wheel, wet-disc type, full hydraulic	
	Parking	Spring applied, hydraulic released brake on transmission	
Steering	Type	Full hydraulic, articulated	
	Steering angle	40° to both right and left angle, respectively	
	Relief pressure	235 kgf/cm ² (3340 psi)	

5) TIGHTENING TORQUE OF MAJOR COMPONENT

No.	Descriptions	Bolt size	Torque		
			kgf · m	lbf · ft	
1	Engine	Engine mounting bolt, nut (rubber, 2EA)	M20 × 2.5	57.9 ± 8.7	419 ± 63
2		Engine mounting bolt (bracket, 8EA)	M12 × 1.75	10.7 ± 1.6	77.4 ± 11.6
3		Engine mounting bolt (T/C housing, 3EA)	M10 × 1.5	4.6 ± 0.9	33.3 ± 6.5
4		Engine mounting bolt (flywheel, 8EA)	M10 × 1.5	4.5 ± 0.6	32.5 ± 4.3
5		Radiator mounting bolt	M16 × 2.0	29.7 ± 5.9	215 ± 42.7
6		Fuel tank mounting bolt, nut	M16 × 2.0	29.7 ± 4.5	215 ± 32.5
7	Hydraulic system	Main pump housing mounting bolt	M16 × 2.0	29.7 ± 4.5	215 ± 32.5
8		Fan & Brake pump housing mounting bolt	M10 × 1.5	6.9 ± 1.4	50 ± 10.1
9		Main control valve mounting bolt	M12 × 1.75	12.8 ± 3.0	92.6 ± 21.7
10		Steering unit mounting bolt	M10 × 1.5	6.9 ± 1.4	50 ± 10.1
11		Stop valve	M10 × 1.5	6.9 ± 1.4	50 ± 10.1
12		Steering valve (EHPS) mounting bolt	M8 × 1.25	2.5 ± 0.5	18.1 ± 3.6
13		Cushion valve	M8 × 1.25	2.5 ± 0.5	18.1 ± 3.6
14		Brake valve mounting bolt	M8 × 1.25	2.5 ± 0.5	18.1 ± 3.6
15		Cut-off valve mounting bolt	M12 × 1.75	12.8 ± 3.0	92.6 ± 21.7
16		Remote control lever mounting bolt	M6 × 1.0	1.1 ± 0.2	8.0 ± 1.4
17		Safety valve	M10 × 1.5	6.9 ± 1.4	50 ± 10.1
18		Hydraulic oil tank mounting bolt	M16 × 2.0	29.7 ± 4.5	215 ± 32.5
19	Power train system	Transmission mounting bolt, nut (rubber, 2EA)	M24 × 3.0	100 ± 15	723 ± 108
20		Transmission mounting bolt (bracket, 6EA)	M20 × 2.5	46.3 ± 7.0	335 ± 50.6
21		Front axle mounting bolt, nut	M33 × 2.0	135 ± 15	976 ± 108
22		Rear axle support mounting bolt, nut	M36 × 3.0	308 ± 46.2	2227 ± 334
23		Tire mounting nut	M22 × 1.5	79 ± 2.5	571 ± 18.1
24		Drive shaft joint mounting bolt	1/2-20UNF	15 ± 2.0	108 ± 14.5
25	Others	Counterweight mounting bolt	M30 × 3.5	199 ± 30	1439 ± 216
26		Additional counterweight mounting bolt	M24 × 3.0	100 ± 15	723 ± 108
27		Operator's seat mounting bolt	M8 × 1.25	3.4 ± 0.8	24.6 ± 5
28		ROPS Cab mounting bolt (4EA)	M30 × 3.5	199 ± 29.9	1440 ± 216
		ROPS Cab mounting nut (4EA)	M16 × 2.0	29.7 ± 4.5	215 ± 32.5

6. TORQUE CHART

Use following table for unspecified torque.

1) BOLT AND NUT

(1) Coarse thread

Bolt size	8T		10T	
	kg · m	lb · ft	kg · m	lb · ft
M 6 × 1.0	0.85 ~ 1.25	6.15 ~ 9.04	1.14 ~ 1.74	8.2 ~ 12.6
M 8 × 1.25	2.0 ~ 3.0	14.5 ~ 21.7	2.73 ~ 4.12	19.5 ~ 29.8
M10 × 1.5	4.0 ~ 6.0	28.9 ~ 43.4	5.5 ~ 8.3	39.8 ~ 60
M12 × 1.75	7.4 ~ 11.2	53.5 ~ 79.5	9.8 ~ 15.8	71 ~ 114
M14 × 2.0	12.2 ~ 16.6	88.2 ~ 120	16.7 ~ 22.5	121 ~ 167
M16 × 2.0	18.6 ~ 25.2	135 ~ 182	25.2 ~ 34.2	182 ~ 247
M18 × 2.5	25.8 ~ 35.0	187 ~ 253	35.1 ~ 47.5	254 ~ 343
M20 × 2.5	36.2 ~ 49.0	262 ~ 354	49.2 ~ 66.6	356 ~ 482
M22 × 2.5	48.3 ~ 63.3	350 ~ 457	65.8 ~ 98.0	476 ~ 709
M24 × 3.0	62.5 ~ 84.5	452 ~ 611	85.0 ~ 115	615 ~ 832
M30 × 3.0	124 ~ 168	898 ~ 1214	169 ~ 229	1223 ~ 1655
M36 × 4.0	174 ~ 236	1261 ~ 1703	250 ~ 310	1808 ~ 2242

(2) Fine thread

Bolt size	8T		10T	
	kg · m	lb · ft	kg · m	lb · ft
M 8 × 1.0	2.17 ~ 3.37	15.7 ~ 24.3	3.04 ~ 4.44	22.0 ~ 32.0
M10 × 1.25	4.46 ~ 6.66	32.3 ~ 48.2	5.93 ~ 8.93	42.9 ~ 64.6
M12 × 1.25	7.78 ~ 11.58	76.3 ~ 83.7	10.6 ~ 16.0	76.6 ~ 115
M14 × 1.5	13.3 ~ 18.1	96.2 ~ 130	17.9 ~ 24.1	130 ~ 174
M16 × 1.5	19.9 ~ 26.9	144 ~ 194	26.6 ~ 36.0	193 ~ 260
M18 × 1.5	28.6 ~ 43.6	207 ~ 315	38.4 ~ 52.0	278 ~ 376
M20 × 1.5	40.0 ~ 54.0	289 ~ 390	53.4 ~ 72.2	386 ~ 522
M22 × 1.5	52.7 ~ 71.3	381 ~ 515	70.7 ~ 95.7	512 ~ 692
M24 × 2.0	67.9 ~ 91.9	491 ~ 664	90.9 ~ 123	658 ~ 890
M30 × 2.0	137 ~ 185	990 ~ 1338	182 ~ 248	1314 ~ 1795
M36 × 3.0	192 ~ 260	1389 ~ 1879	262 ~ 354	1893 ~ 2561

2) PIPE AND HOSE (FLARE type)

Thread size	Width across flat (mm)	kgf · m	lbf · ft
1/4"	19	4	28.9
3/8"	22	5	36.2
1/2"	27	9.5	68.7
3/4"	36	18	130
1"	41	21	152
1-1/4"	50	35	253

3) PIPE AND HOSE (ORFS type)

Thread size	Width across flat (mm)	kgf · m	lbf · ft
9/16-18	19	4	28.9
11/16-16	22	5	36.2
13/16-16	27	9.5	68.7
1-3/16-12	36	18	130
1-7/16-12	41	21	152
1-11/16-12	50	35	253

4) FITTING

Thread size	Width across flat (mm)	kgf · m	lbf · ft
1/4"	19	4	28.9
3/8"	22	5	36.2
1/2"	27	9.5	68.7
3/4"	36	18	130
1"	41	21	152
1-1/4"	50	35	253

7. RECOMMENDED OILS

Use only oils listed below or equivalent.

Do not mix different brand oil.

Service point	Kind of fluid	Capacity ℓ (U.S. gal)	Ambient temperature °C (°F)							
			-50 (-58)	-30 (-22)	-20 (-4)	-10 (14)	0 (32)	10 (50)	20 (68)	30 (86)
Engine oil pan	Engine oil	18 (4.8)	* ² SAE 5W-40							
			SAE 30							
			SAE 10W							
			SAE 10W-30							
			SAE 15W-40							
Transmission	Engine oil	28 (7.4)	SAE 10W-30							
			SAE 15W-40							
Axle	UTTO	FR : 32 (8.5) RR : 24 (6.3)	*Refer to below list							
Hydraulic tank	Hydraulic oil	Tank; 137 (36.2) System; 202 (53.4)	* ² ISO VG 15							
			ISO VG 46							
			ISO VG 68							
Fuel tank	Diesel fuel* ¹	294 (77.6)	* ² ASTM D975 NO.1							
			ASTM D975 NO.2							
Fitting (grease nipple)	Grease	As required	* ² NLGI NO.1							
			NLGI NO.2							
Radiator (reservoir tank)	Mixture of antifreeze and water	46 (12.2)	Ethylene glycol base permanent type (50 : 50)							
			* ² Ethylene glycol base permanent type (60 : 40)							

SAE : Society of Automotive Engineers

API : American Petroleum Institute

ISO : International Organization for Standardization

NLGI : National Lubricating Grease Institute

ASTM : American Society of Testing and Material

UTTO : Universal Tractor Transmission Oil

* Recommended oil list

- BP TERRAC SUPER TRANSMISSION 10W-30

- CASTROL AGRI TRANS PLUS 10W-30

- MOBILFLUID 426

- SHELL DONAX TD 10W-30

- TOTAL DYNATRANS MPV

*¹ Ultra low sulfur diesel

- sulfur content ≤ 15 ppm

*² Cold region

- Russia, CIS, Mongolia