


1. ILLUMINATION CIRCUIT


1) OPERATING FLOW

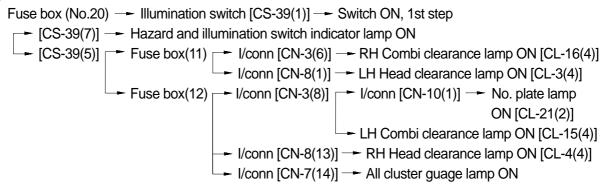

2) CHECK POINT


Engine	Key switch	Check point	Voltage
OFF	ON	① - GND (Switch input)	20~25V
		② - GND (Switch output)	
		③ - GND (To light)	
		④ - GND (To gauge lamp)	

ILLUMINATION CIRCUIT

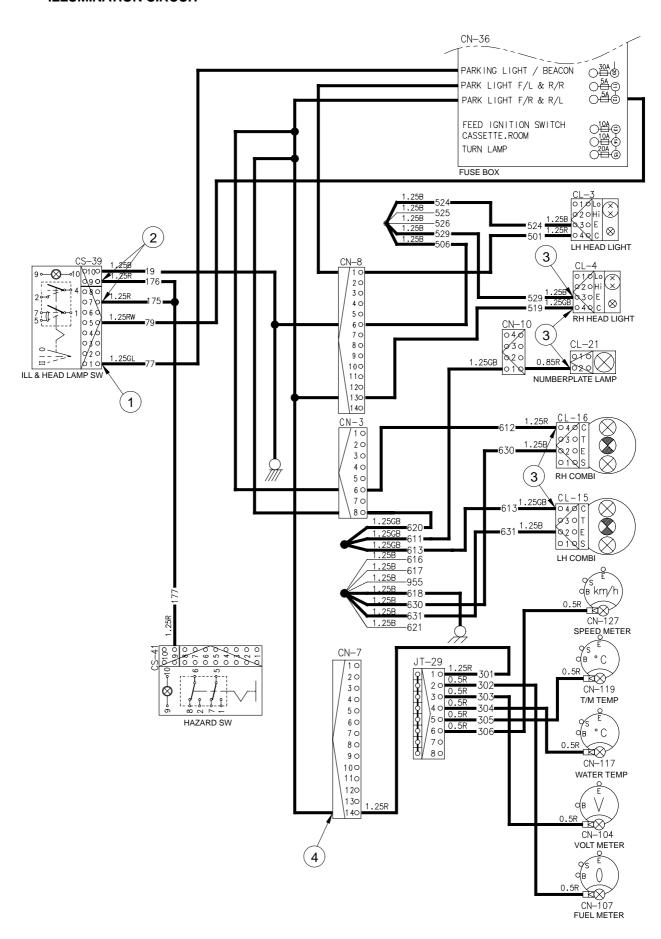


2. HEAD LIGHT CIRCUIT

1) OPERATING FLOW

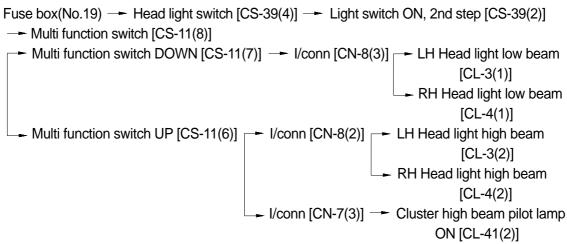


2) CHECK POINT

Engine	Key switch	Check point	Voltage
OFF	ON	① - GND (Switch input)	20~25V
		② - GND (Switch output)	
		③ - GND (Multi function input)	
		④ - GND (Multi function output)	
		⑤ - GND (Multi function output)	
		⑥ - GND (Low beam)	
		⑦ - GND (High beam)	
		® - GND (Passing B⁺)	

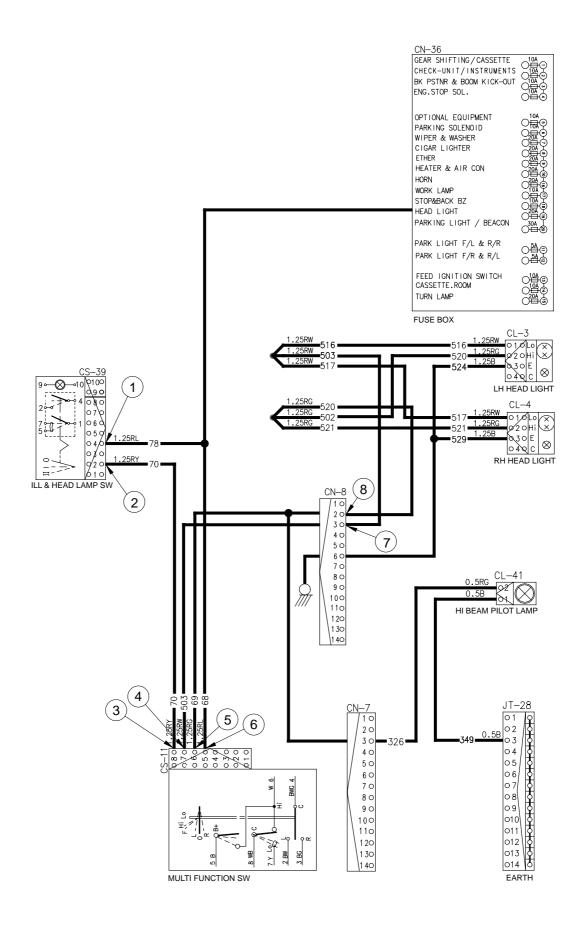


3. WORK LIGHT SWITCH

1) OPERATING FLOW

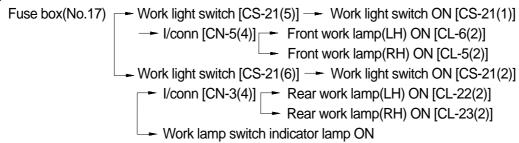

2) CHECK POINT

Engine	Key switch	Check point	Voltage
OFF	ON	① - GND (Switch input)	20~25V
		② - GND (Switch output)	
		③ - GND (Front work light)	
		④ - GND (Rear work light)	

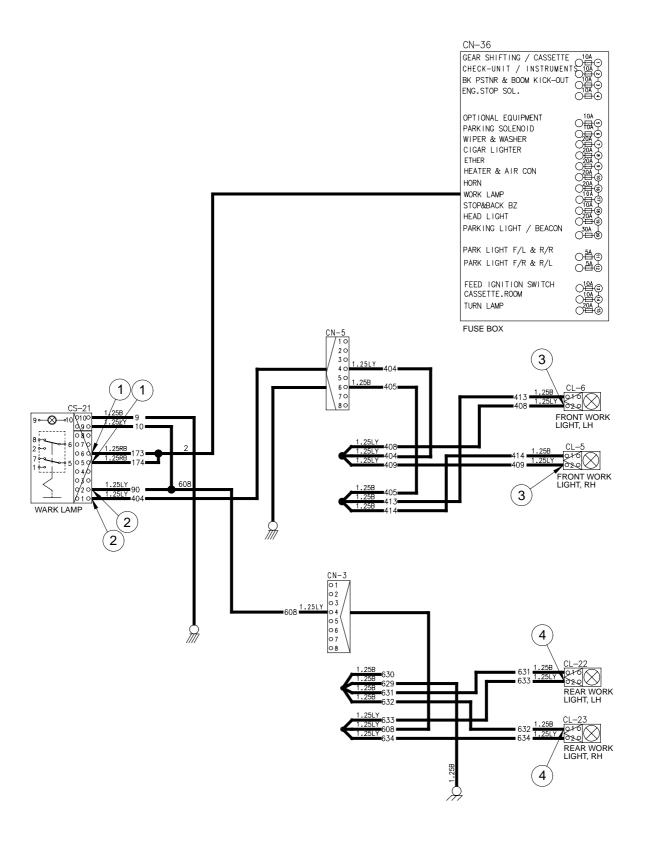

4. STARTING CIRCUIT

1) OPERATING FLOW

Battery(+) terminal — Battery relay(M8, B+ terminal) — Fusible link [CN-60(1)] — I/conn [CN-1(1)] — Fuse box (No.13) — Start switch [CS-2(1)]

* The gear selector lever is neutral position. It is necessary condition before the starting.
The gear selector has an output signal which is activated whenever the shift lever is in the neutral position. This signal can be used to control a relay and prevent engine from starting whenever the shift lever is not in the neutral position.

(1) When start key switch is in ON position

```
Start switch ON Start switch [CS-2(2)] - I/conn [CN-2(1)] - Battery relay [CR-1]
- Battery relay operating(All power is supplied with the electric component)
- Start switch [CS-2(3)] - Fuse box [No.4] - I/conn [CS-2(8)]
- I/conn [CN-4(9)] - Engine stop solenoid [CN-79]
```


(2) When start key switch is in START position

Start switch START [CS-2(5)] - Start safety relay [CR-5(2)] - Start safety relay [CR-5(4)]

- → I/conn [CN-3(3)] → I/conn [CN-4(7)] → Start relay [CR-23(2)]
- → Starter(Terminal B⁺ and S connector of start motor)

2) CHECK POINT

Engine	Key switch	Check point	Voltage
	ON	① - GND (Battery B ⁺)	20~25V
		② - GND (Fusible link)	
		③ - GND (Start key B⁺)	
		④ - GND (Start key BR terminal)	
D		⑤ - GND (I/conn CN-2(1))	
Running		⑥ - GND (Start key R2 terminal)	
		⑦ - GND (Start safety relay output)	
		® - GND (Check unit)	
		GND (Start key IG terminal)	
		① - GND (Engine storp solenoid)	

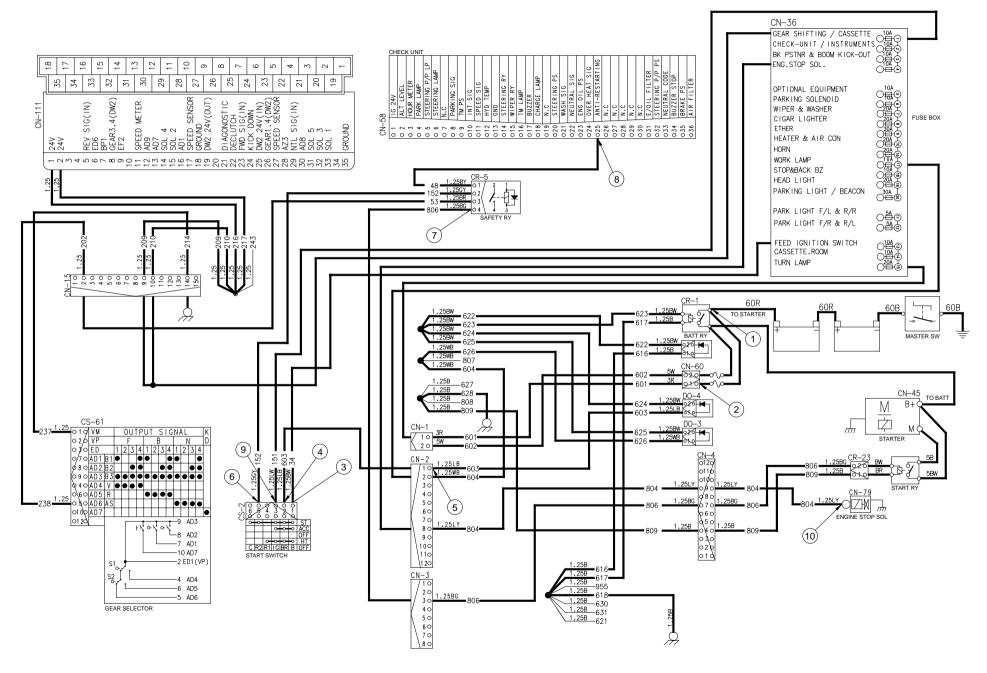

5. ENGINE STOP CIRCUIT

1) OPERATING FLOW

Start key OFF [CS-2(3)] — Fuse box (No.4) — I/conn [CN-2(8)] — I/conn [CN-4(9)] — Engine stop solenoid OFF [CN-79]

2) CHECK POINT

Engine	Key switch	Check point	Voltage
OFF	055	GND (Start key IG terminal)	0) /
	OFF	GND (Engine stop solenoid)	0V

* GND : Ground

3) WIRING DIAGRAM - See page 7-12.

6. CHARGING CIRCUIT

When the starter is activated and the engine is started, the operator releases the key switch to the ON position.

Charging current generated by operating alternator flows into the battery through the battery relay(CR-1).

The current also flows from alternator to each electrical component and controller through the fuse box.

1) OPERATING FLOW

(1) Warning flow

```
Altermator [CN-74(I)] → I/conn [CN-4(6)] → I/conn [CN-2(2)] → Check unit [CN-58(2)→(18)] → I/conn [CN-6(1)] → Cluster charge warning lamp ON [CL-46(1), Below 24V] → JT-27(4)→(10) → Volt meter [CN-104(B)]
```

(2) Charging flow

```
Alternator — Starter [CN-45(B+)] — Battery relay [CR-1]


Battery(+) terminal — Charging

I/conn [CN-60(1),(2)] — I/conn [CN-1(1),(2)] — Fuse box
```

2) CHECK POINT

Engine	Key switch	Check point	Voltage
Running	ON	① - GND (Battery)	20~28V
		② - GND (Battery relay)	
		③ - GND (ALT B)	
		④ - GND (ALT I)	
		⑤ - GND (Check unit)	
		⑥ - GND (Fuse box)	

Engine	Key switch	Check point	Resistance
Running	ON	⑦ - GND (Cluster)	∞ Ω

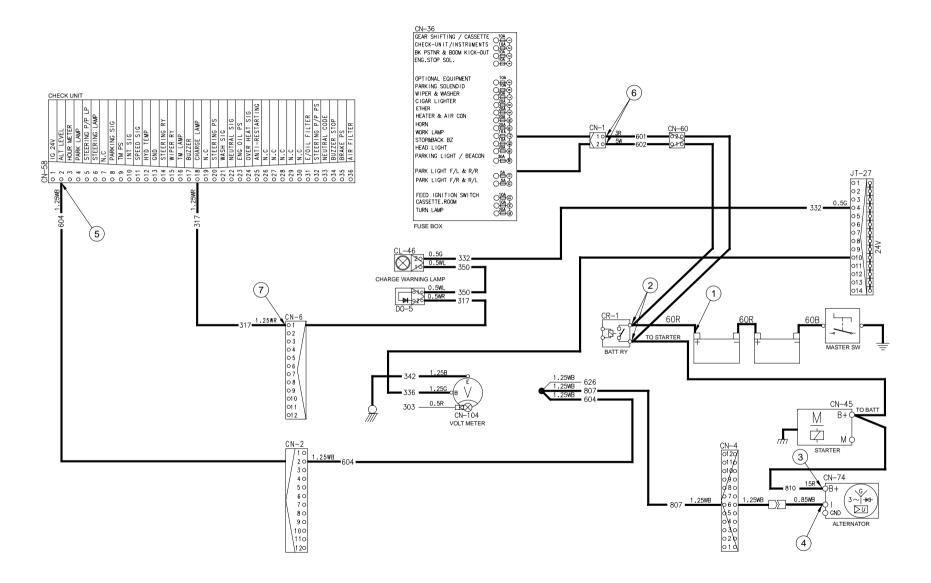

7. ELECTRIC PARKING, DECLUTCH CIRCUIT


1) OPERATING FLOW

(1) Parking OFF

Fuse box (No.6) — Parking switch OFF [CS-17(6)→(8)] — Parking solenoid ON (activated) — Parking brake released (By hydraulic pressure)

(2) Parking ON


(3) Declutch ON

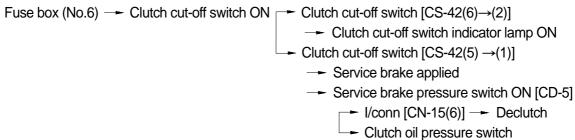

2) CHECK POINT

Engine	Key switch	Check point	Voltage
		① - GND (Parking switch input)	
		② - GND (Parking switch output)	
		③ - GND (Parking switch input)	
Running	ON	④ - GND (Parking switch output)	20~25V
		⑤ - GND (Parking solenoid)	
		⑥ - GND (Press switch clutch cut-off)	
		⑦ - GND (Decutch input signal)	

ELECTRIC PARKING, DECLUTCH CIRCUIT

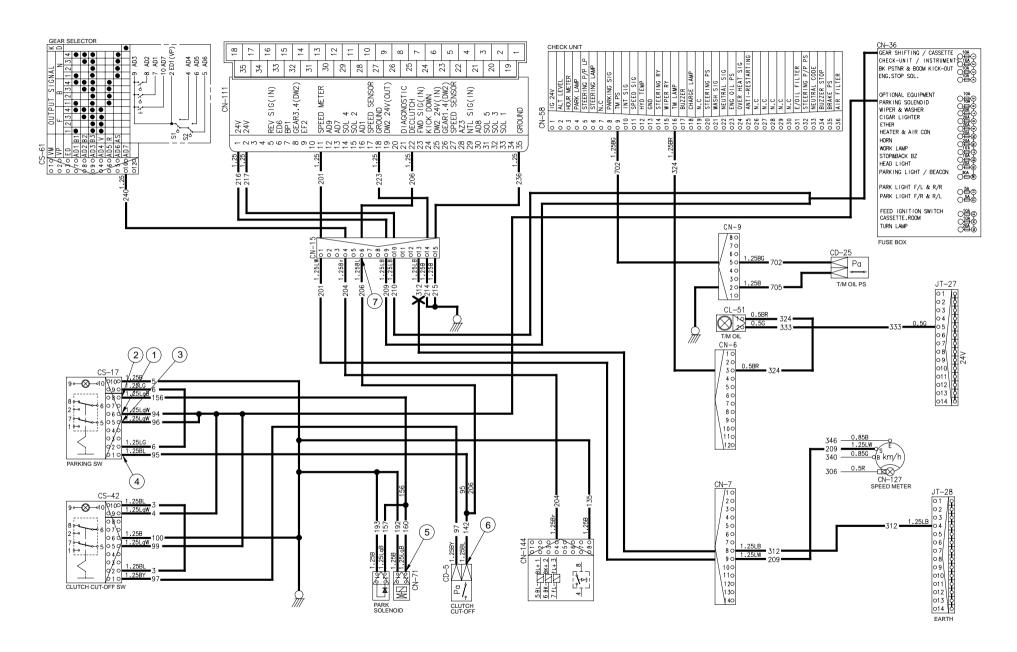

8. WIPER AND WASHER CIRCUIT

1) OPERATING FLOW

Fuse box (No.7)

Wiper relay [CR-4(1)→(3)]

Front wiper motor [CN-21(P)]

Front relay 2 [CR-26(2), (3)]

Multi function switch [CS-12(6)]

Rear wiper & washer switch [CS-3(1)]

Rear wiper motor [CN-102(P)]

(1) Front washer switch ON

① Washer switch ON [CS-12(6)→(2)] — Washer tank [CN-22(2)] — Washer operating

Check unit [CN-58(21)→(15)] — Wiper relay 2

[CR-26(2)→(4)] — Wiper motor [CR-21(Lo)]

Wiper motor operating (Low)

(2) Front wiper switch ON

① INT position

2 Lo position

Wiper switch ON [CS-12(6)→(4)] → Wiper motor [CN-21(Lo)] → Wiper motor operating (Low)

3 Hi position

Wiper switch ON [CS-12(6) \rightarrow (3)] \longrightarrow Wiper relay [CR-4(1) \rightarrow (4)] \longrightarrow Wiper motor [CR-21(Hi)] \longrightarrow Wiper motor operating (High)

(3) Auto-parking (when switch OFF)

Wiper motor [CN-21(Lo)] \longrightarrow OFF \longrightarrow Fuse box (No. 7) \longrightarrow Wiper relay [CR-4(4) \rightarrow (3)] \longrightarrow Wiper motor [CN-21(P) \rightarrow (S)] \longrightarrow Wiper motor stop

(4) Rear wiper and washer switch

① Wiper switch ON(1st step)

Wiper switch ON [CS-3(1)→(6)]

— Wiper motor operating

Rear wiper and washer switch indicator lamp ON

② Washer switch ON(2nd step)

Washer switch ON [CS-3(1)→(2)] → Rear washer tank [CN-103(2)] → Washer operating

2) CHECK POINT

Engine	Key switch	Check point	Voltage
Stop	ON	① - GND (Front wiper power input) ② - GND (Rear wiper power input) ③ - GND (Wiper relay power input) ④ - GND (Front wiper motor Lo power input) ⑤ - GND (Front wiper motor High power input) ⑥ - GND (Wiper relay power input) ⑦ - GND (Front washer power output) ⑧ - GND (Rear washer power output) ⑨ - GND (Front wiper motor power output) ① - GND (Rear wiper motor power output)	20~25V

