


## GROUP 2 PILOT CONTROL

### 1. REMOVAL

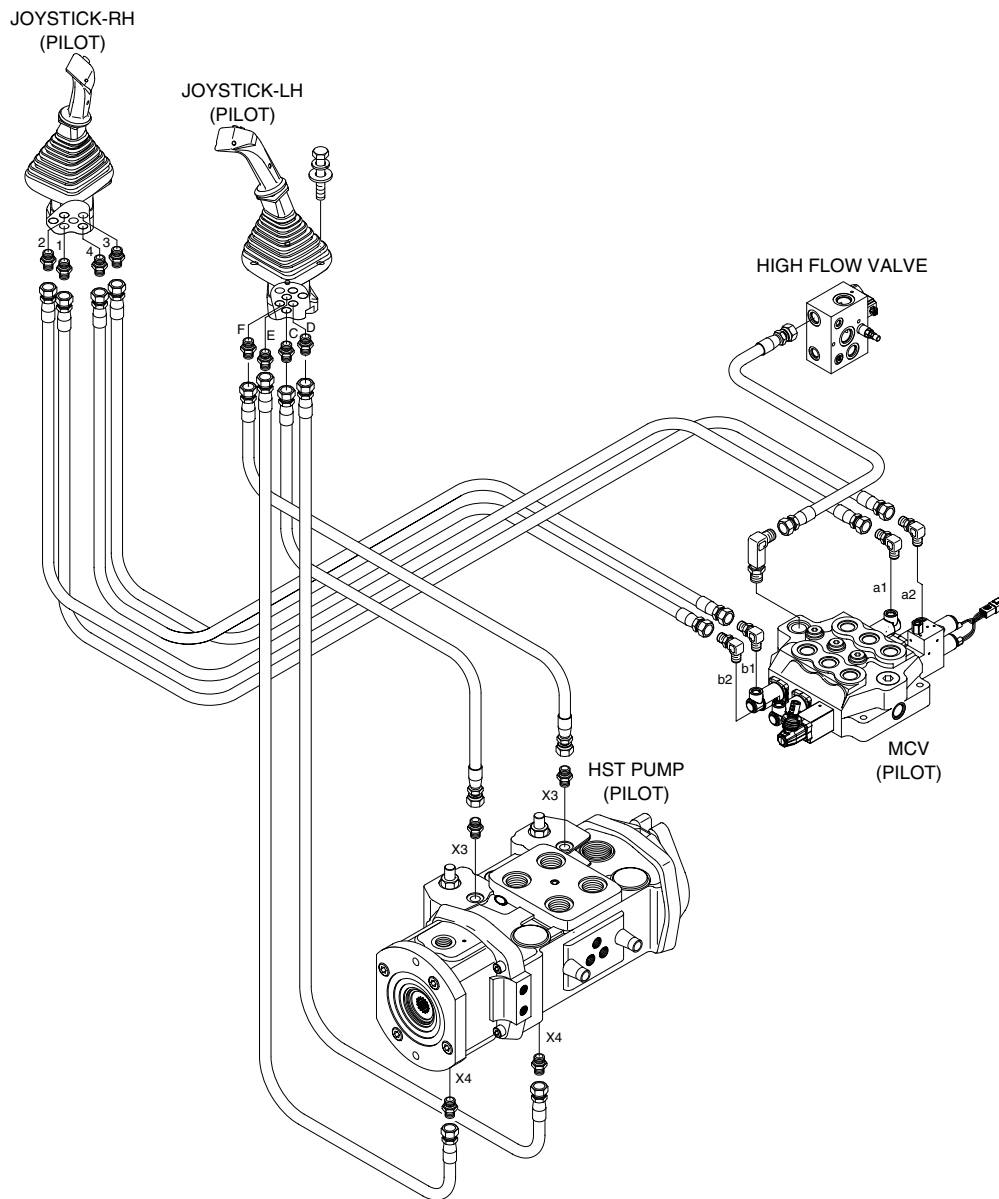

6507ACN01B

※ **Be sure engine turn off and boom and bucket lowered on ground before removal and installation work of hand control device.**

- 1) Low boom and bucket on ground.
- 2) Raise the canopy to service position.  
Refer to operator's manual at page 4-14.
- 3) Disassemble hoses connected with HST pump and main control valve.
- 4) Remove the hoses from the joystick (LH and RH).

## 2. INSTALL

※ Carry out installation in the reverse order to removal.

- 1) Install joystick (LH and RH) with hoses.
- 2) Assemble hoses connected with HST pump and main control valve.

