
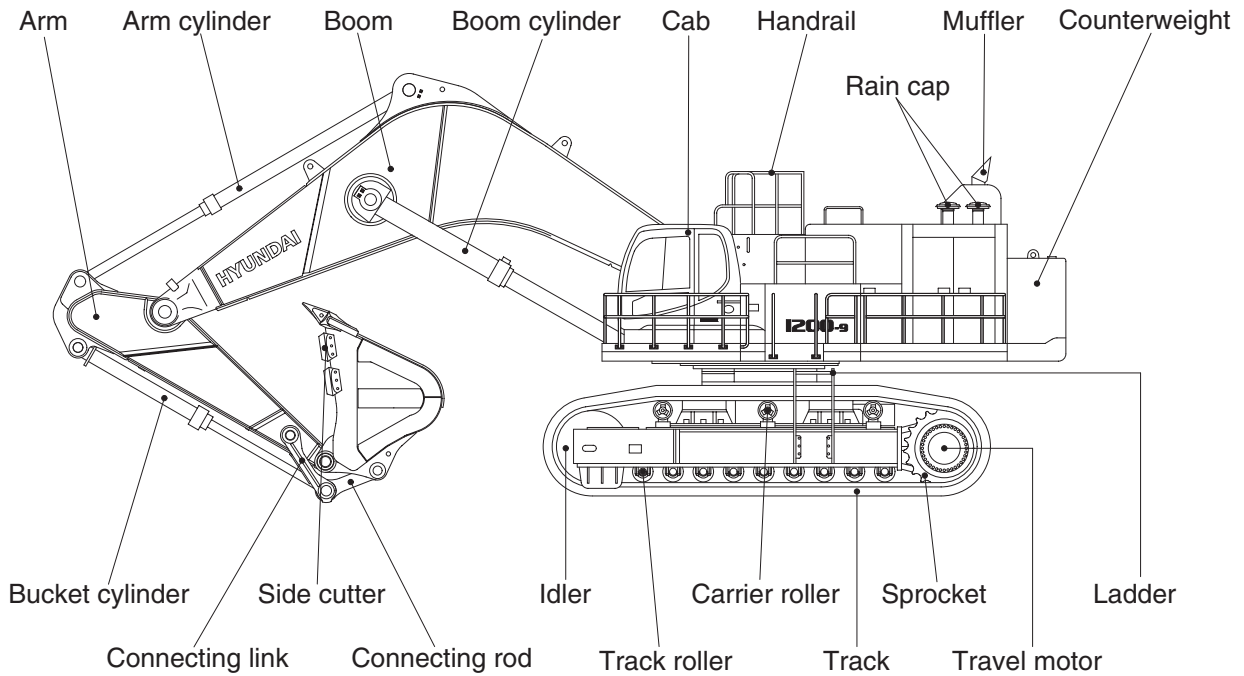


# GROUP 2 SPECIFICATIONS


## 1. MAJOR COMPONENT

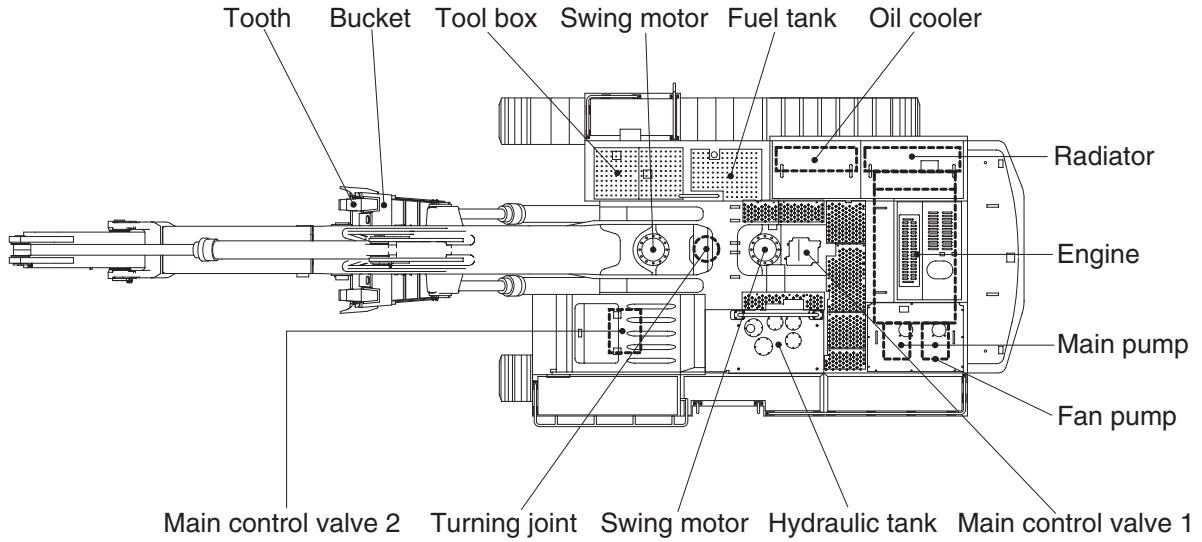

120092SP01

## 2. SPECIFICATIONS

- 7.55 m (24' 9") BOOM, 3.40 m (11' 2") ARM

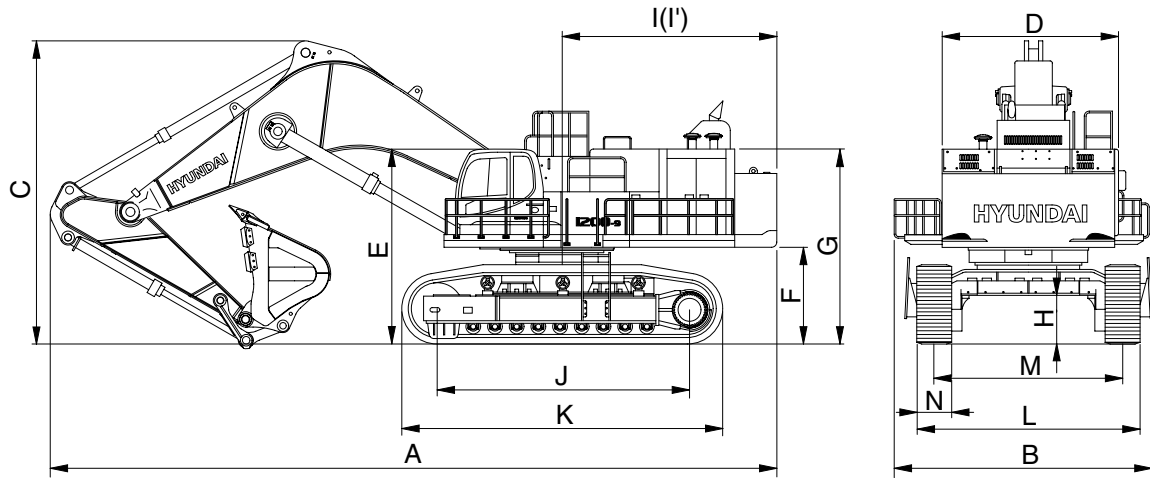


120092SP02

Description		Unit	Specification
Operating weight		kg (lb)	118000 (260140)
Bucket capacity (SAE heaped), standard		m <sup>3</sup> (yd <sup>3</sup> )	6.70 (8.76)
Overall length	A	mm (ft-in)	14580 (47' 10")
Overall width, with 700 mm shoe	B		5560 (18' 3")
Overall height	C		6210 (20' 4")
Superstructure width	D		3520 (11' 7")
Overall height of cab	E		4250 (13' 11")
Ground clearance of counterweight	F		1825 ( 6' 0")
Body height	G		4460 (14' 8")
Minimum ground clearance	H		990 ( 3' 3")
Rear-end distance	I		4805 (15' 9")
Rear-end swing radius	I'		4870 (16' 0")
Distance between tumblers	J		5010 (16' 5")
Undercarriage length	K		6400 (21' 0")
Undercarriage width	L		4600 (15' 1")
Track gauge	M		3900 (12' 10")
Track shoe width, standard	N		700 (28")
Travel speed (low/high)			km/hr (mph)
Swing speed		rpm	5.6
Gradeability		Degree (%)	35 (70)
Ground pressure (700 mm shoe)		kgf/cm <sup>2</sup> (psi)	1.51 (21.47)
Max traction force		kg (lb)	70200 (154760)

### 3. WORKING RANGE

· 7.55 m (24' 9") BOOM

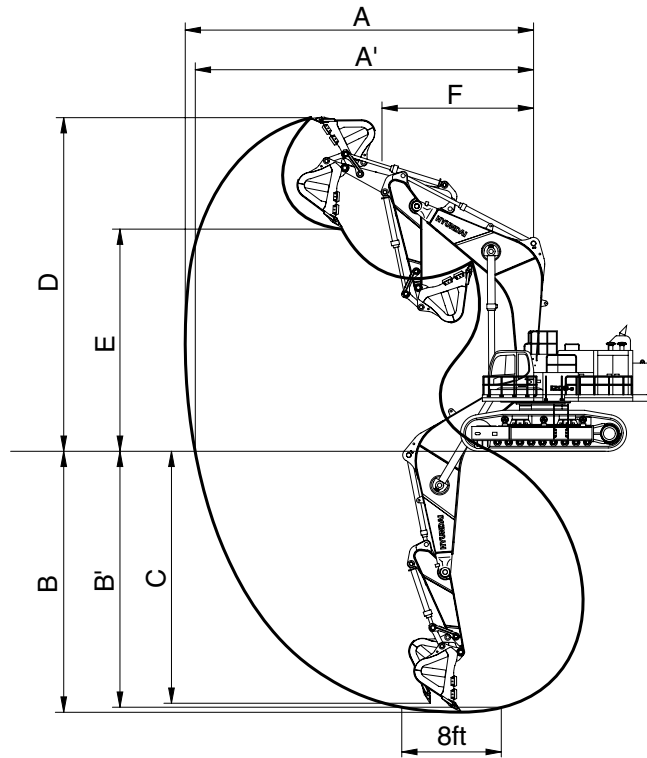

120092SP03

Description		3.40 m (11' 2") Arm	
Max digging reach	A	13760 mm (45' 2")	
Max digging reach on ground	A'	13380 mm (43'11")	
Max digging depth	B	8010 mm (26' 3")	
Max digging depth (8ft level)	B'	7840 mm (25' 9")	
Max vertical wall digging depth	C	5230 mm (17' 2")	
Max digging height	D	12420 mm (40' 9")	
Max dumping height	E	7840 mm (25' 9")	
Min swing radius	F	6550 mm (21' 6")	
Bucket digging force	SAE	511.9[558.5] kN	
		52200[56950] kgf	
		115080[125550] lbf	
	ISO	581.5[636.0] kN	
		59300[64690] kgf	
		130730[142610] lbf	
Arm crowd force	SAE	423.7[462.2] kN	
		43200[47130] kgf	
		95240[103900] lbf	
	ISO	429.5[468.6] kN	
		43800[47780] kgf	
		96560[105340] lbf	

[ ] : Power boost

#### 4. WEIGHT















Item	R1200-9	
	kg	lb
Upperstructure assembly	43700	96340
Main frame weld assembly	11960	26370
Engine assembly	2720	6000
Main pump assembly	160	350
Fan pump	55	120
Gear box	580	1280
Main control valve assembly 1	450	990
Main control valve assembly 2	160	350
Swing motor assembly	440	970
Hydraulic oil tank assembly	1770	3900
Fuel tank assembly	1940	4280
Counterweight	20400	44970
Cab assembly	435	960
Lower chassis assembly	45940	101280
Lower track center frame	17700	39020
Swing bearing	2170	4780
Travel motor assembly	970	2140
Turning joint	75	165
Track recoil spring and tension body	1030	2270
Idler	850	1870
Sprocket	315	700
Carrier roller	70	150
Track roller	210	460
Track-chain assembly (700 mm double grouser shoe)	5070	11180
Front attachment assembly (7.55 m boom, 3.40m arm, 6.70 m <sup>3</sup> SAE heaped bucket)	28360	62520
7.55 m boom assembly	10310	22730
3.40 m arm assembly	4010	8840
6.70 m <sup>3</sup> SAE heaped bucket	5860	12920
Boom cylinder assembly	1190	2620
Arm cylinder assembly	1510	3330
Bucket cylinder assembly	1050	2310
Bucket control rod assembly	1450	3200

## 5. LIFTING CAPACITIES

### 1) ROBEX R1200-9

(1) 7.55 m (24' 9") boom, 3.40 m (11' 2") arm equipped with 6.70 m<sup>3</sup> (SAE heaped) bucket and 700 mm (28") double grouser shoe and 20400 kg (44970 lb) counterweight.

-  : Rating over-front
  : Rating over-side or 360 degree


Load point height	Load radius												At max. reach				
	3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		9.0 m (30.0 ft)		10.5 m (35.0 ft)		Capacity	Reach			
															m (ft)		
9.0 m (30 ft)	kg														*12990	*12990	11.22
	lb														*28640	*28640	(36.8)
7.5 m (25.0 ft)	kg								*19680	*19680	*6060	*6060	*12910	*12910	*12910	*12910	11.91
	lb								*43390	*43390	*13360	*13360	*28460	*28460	*28460	*28460	(39.1)
6.0 m (20.0 ft)	kg								*21470	*21470	*13680	*13680	*13160	12140	*13160	12140	12.33
	lb								*47330	*47330	*30160	*30160	*29010	26760	*29010	26760	(40.5)
4.5 m (15.0 ft)	kg				*36250	*36250	*27920	*27920	*22880	22750	*19250	16820	*13710	11340	*13710	11340	12.53
	lb				*79920	*79920	*61550	*61550	*50440	50160	*42440	37080	*30230	25000	*30230	25000	(41.1)
3.0 m (10.0 ft)	kg				*40020	*40020	*30110	29510	*24120	21540	*20020	16120	*14610	11030	*14610	11030	12.52
	lb				*88230	*88230	*66380	65060	*53180	47490	*44140	35540	*32210	24320	*32210	24320	(41.1)
1.5 m (5.0 ft)	kg				*41590	40030	*31330	27820	*24800	20470	*20170	15490	*15100	11210	*15100	11210	12.28
	lb				*91690	88250	*69070	61330	*54670	45130	*44470	34150	*33290	24710	*33290	24710	(40.3)
Ground Line	kg				*52630	*52630	*40870	38600	*31210	26690	*24590	19690	*19550	15010	*14600	11950	11.82
	lb				*116030	*116030	*90100	85100	*68810	58840	*54210	43410	*43100	33090	*32190	26350	(38.8)
-1.5 m (-5.0 ft)	kg	*47300	*47300	*49630	*49630	*38120	38060	*29560	26110	*23150	19270			*13620	13510		11.08
	lb	*104280	*104280	*109420	*109420	*84040	83910	*65170	57560	*51040	42480			*30030	29780		(36.4)
-3.0 m (-10.0 ft)	kg	*52360	*52360	*42230	*42230	*33290	*33290	*26020	*26020	*19800	19280			*11570	*11570		10.01
	lb	*115430	*115430	*93100	*93100	*73390	*73390	*57360	*57360	*43650	42510			*25510	*25510		(32.8)
-4.5 m (-15.0 ft)	kg	*37090	*37090	*31790	*31790	*25700	*25700	*19620	*19620					*6850	*6850		8.43
	lb	*81770	*81770	*70080	*70080	*56660	*56660	*43250	*43250					*15100	*15100		(27.7)
-6.0 m (-20.0 ft)	kg				*13170	*13170											
	lb				*29030	*29030											

- Note
1. Lifting capacity are based on SAE J1097 and ISO 10567.
  2. Lifting capacity of the ROBEX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
  3. The load point is a hook located on the back of the bucket.
  4. \*indicates load limited by hydraulic capacity.

## 6. BUCKET SELECTION GUIDE

### 1) ROBEX 1200-9

#### (1) GENERAL BUCKET



6.70 m<sup>3</sup> SAE  
heaped bucket

Capacity		Width		Weight	Recommendation
					7.55 m (24' 9") boom
SAE heaped	CECE heaped	Without side cutter	With side cutter		3.40 m arm (11' 2")
※ 6.70 m <sup>3</sup> (8.76 yd <sup>3</sup> )	5.88 m <sup>3</sup> (7.69 yd <sup>3</sup> )	2390 mm (94.1")	-	5864 kg (12930 lb)	

※ : Standard bucket


Applicable for materials with density of 2000 kg/m<sup>3</sup> (3370 lb/yd<sup>3</sup>) or less

## 7. UNDERCARRIAGE

### 1) TRACKS

X-leg type center frame is integrally welded with reinforced box-section track frames. The design includes dry tracks, lubricated rollers, idlers, sprockets, hydraulic track adjusters with shock absorbing springs and assembled track-type tractor shoes with triple grousers.

### 2) TYPES OF SHOES

Model	Shapes		Double grouser		
					
R1200-9	Shoe width	mm (in)	700 (28)	800 (32)	900 (36)
	Operating weight	kg (lb)	118000 (260140)	118670 (261620)	119470 (263380)
	Ground pressure	kgf/cm <sup>2</sup> (psi)	1.51 (21.47)	1.34 (19.05)	1.20 (17.06)
	Under carriage width	mm (ft-in)	4600 (15' 1")	4700 (15' 5")	4800 (15' 9")

### 3) NUMBER OF ROLLERS AND SHOES ON EACH SIDE

Item	Quantity
Carrier rollers	3 EA
Track rollers	8 EA
Track shoes	52 EA

#### 4) SELECTION OF TRACK SHOE

Suitable track shoes should be selected according to operating conditions.

##### Method of selecting shoes

Confirm the category from the list of applications in **table 2**, then use **table 1** to select the shoe. Wide shoes (categories B and C) have limitations on applications. Before using wide shoes, check the precautions, then investigate and study the operating conditions to confirm if these shoes are suitable.

Select the narrowest shoe possible to meet the required flotation and ground pressure. Application of wider shoes than recommendations will cause unexpected problem such as bending of shoes, crack of link, breakage of pin, loosening of shoe bolts and the other various problems.

※ **Table 1**

Track shoe	Specification	Category
700 mm double grouser	Standard	A
800 mm double grouser	Option	B
900 mm double grouser	Option	C

※ **Table 2**

Category	Applications	Applications
A	Rocky ground, river beds, normal soil	<ul style="list-style-type: none"> <li>Travel at low speed on rough ground with large obstacles such as boulders or fallen trees</li> </ul>
B	Normal soil, soft ground	<ul style="list-style-type: none"> <li>These shoes cannot be used on rough ground with large obstacles such as boulders or fallen trees</li> <li>Travel at high speed only on flat ground</li> <li>Travel slowly at low speed if it is impossible to avoid going over obstacles</li> </ul>
C	Extremely soft ground (swampy ground)	<ul style="list-style-type: none"> <li>Use the shoes only in the conditions that the machine sinks and it is impossible to use the shoes of category A or B</li> <li>These shoes cannot be used on rough ground with large obstacles such as boulders or fallen trees</li> <li>Travel at high speed only on flat ground</li> <li>Travel slowly at low speed if it is impossible to avoid going over obstacles</li> </ul>



## 8. SPECIFICATIONS FOR MAJOR COMPONENTS

### 1) ENGINE

Item	Specification
Model	Cummins QSK 23
Type	4-cycle turbocharged charge air cooled diesel engine
Cooling method	Water cooling
Number of cylinders and arrangement	6 cylinders, in-line
Firing order	1-5-3-6-2-4
Combustion chamber type	Direct injection type
Cylinder bore × stroke	170 × 170 mm (6.7" × 6.7")
Piston displacement	23000 cc (1404 cu in)
Compression ratio	16 : 1
Rated gross horse power(SAE J1995)	760 hp at 1800 rpm (567 kW at 1800 rpm)
Maximum torque	354 kgf · m (2560 lbf · ft) at 1350 rpm
Engine oil quantity	70 l (18.5 U.S. gal)
Dry weight	2070 kg (6000 lb)
High idling speed	1800 ± 50 rpm
Low idling speed	900 ± 50 rpm
Rated fuel consumption	153.6 g/Hp · hr at 1800 rpm
Starting motor	Nikko (24 V-7.5 kW × 2EA)
Alternator	Sawafuji 24 V-75 A
Battery	4 × 12 V × 160 Ah

### 2) GEAR BOX

Item	Specification
Model	Stiebel 4325
Ratio	1.05452 (speed increae)

### 3) MAIN PUMP

Item	Specification
Type	Variable displacement axis piston pumps
Capacity	3 × 280 cc/rev
Maximum pressure	320 kgf/cm <sup>2</sup> (4550 psi) [350 kgf/cm <sup>2</sup> (4980 psi)]
Rated oil flow	3 × 490 l /min (129.4 U.S. gpm / 107.8 U.K. gpm)
Rated speed	1800 rpm

[ ] : Power boost

#### 4) FAN PUMP

Item	Specification
Type	Variable displacement axis piston pumps
Capacity	65 cc/rev
Maximum pressure	270 kgf/cm <sup>2</sup> (3840 psi)
Rated speed	1800 rpm

#### 5) GEAR PUMP

Item	Specification
Type	Fixed displacement gear pump single stage
Capacity	30 cc/rev
Maximum pressure	40 kgf/cm <sup>2</sup> (570 psi)
Rated oil flow	54 l /min (14.3 U.S. gpm/11.9 U.K. gpm)

#### 6) MAIN CONTROL VALVE

Item	Specification
Type	13 spools
Operating method	Hydraulic pilot system
Main relief valve pressure	320 kgf/cm <sup>2</sup> (4550 psi) [350 kgf/cm <sup>2</sup> (4980 psi)]
Overload relief valve pressure	360 kgf/cm <sup>2</sup> (5120 psi)

[ ]: Power boost

#### 7) SWING MOTOR

Item	Specification
Type	Fixed displacement axial piston motor
Capacity	250 cc/rev
Relief pressure	300 kgf/cm <sup>2</sup> (4270 psi)
Braking system	Automatic, spring applied hydraulic released
Braking torque	107 kgf · m (774 lbf · ft)
Brake release pressure	30~50 kgf/cm <sup>2</sup> (427~711 psi)
Reduction gear type	2 - stage planetary

#### 8) REMOTE CONTROL VALVE

Item	Specification	
Type	Pressure reducing type	
Operating pressure	Minimum	6.5 kgf/cm <sup>2</sup> (92 psi)
	Maximum	25 kgf/cm <sup>2</sup> (360 psi)
Single operation stroke	Lever	61 mm (2.4 in)
	Pedal	123 mm (4.84 in)

## 9) TRAVEL MOTOR

Item	Specification
Type	Variable displacement axial piston motor
Relief pressure	350 kgf/cm <sup>2</sup> (4980 psi)
Capacity (max / min)	337.2/228.6 cc/rev
Reduction gear type	3-stage planetary
Braking system	Automatic, spring applied hydraulic released
Brake release pressure	18 kgf/cm <sup>2</sup> (256 psi)
Braking torque	114 kgf · m (825 lbf · ft)

## 10) CYLINDER

Item		Specification
Boom cylinder	Bore dia × Rod dia × Stroke	∅ 230 × ∅ 160 × 2165 mm
	Cushion	Extend only
Arm cylinder	Bore dia × Rod dia × Stroke	∅ 260 × ∅ 180 × 2180 mm
	Cushion	Extend and retract
Bucket cylinder	Bore dia × Rod dia × Stroke	∅ 240 × ∅ 170 × 1792 mm
	Cushion	Extend only

※ Discoloration of cylinder rod can occur when the friction reduction additive of lubrication oil spreads on the rod surface.

※ Discoloration does not cause any harmful effect on the cylinder performance.

## 11) SHOE

Item		Width	Ground pressure	Link quantity	Overall width
R1200-9	Standard	※ 700 mm (28")	1.51 kgf/cm <sup>2</sup> (21.47 psi)	52	4600 mm (15' 1")
	Option	※ 800 mm (32")	1.34 kgf/cm <sup>2</sup> (19.05 psi)	52	4700 mm (15' 5")
		※ 900 mm (36")	1.20 kgf/cm <sup>2</sup> (17.06 psi)	52	4800 mm (15' 9")

※ Double grouser

## 12) BUCKET

Item		Capacity		Tooth quantity	Width	
		SAE heaped	CECE heaped		Without side cutter	With side cutter
R1200-9	Standard	6.70 m <sup>2</sup> (8.76 yd <sup>3</sup> )	5.88 m <sup>2</sup> (7.69 yd <sup>3</sup> )	5	2390 mm (94.1")	-

## 9. RECOMMENDED OILS

Use only oils listed below. Do not mix different brand oil.

Please use HYUNDAI genuine oil and grease.

Service point	Kind of fluid	Capacity ℓ (U.S. gal)	Ambient temperature °C ( °F)							
			-50 (-58)	-30 (-22)	-20 (-4)	-10 (14)	0 (32)	10 (50)	20 (68)	30 (86)
Engine oil pan	Engine oil	70 (18.5)	★SAE 5W-40							
			SAE 30							
			SAE 10W							
			SAE 10W-30							
			SAE 15W-40							
Gear box	Heavy duty gear oil	6.0 (1.6)	★SAE 75W-90							
			ISO VG 100~220							
Swing drive	Gear oil	8.0×2 (2.1×2)	★SAE 75W-90							
Final drive		20×2 (5.3×2)	SAE 80W-90							
Hydraulic tank	Hydraulic oil	Tank : 670 (177) System: 1160 (306)	★ISO VG 15							
			ISO VG 32							
			ISO VG 46							
			ISO VG 68							
Fuel tank	Diesel fuel	1475 (390)	★ASTM D975 NO.1							
			ASTM D975 NO.2							
Lower roller	Gear oil	1.08 (0.3)	★SAE 75W-90							
Upper roller		0.68 (0.18)	SAE 85W-140							
Idler		0.83 (0.22)								
Fitting (grease nipple)	Grease	As required	★NLGI NO.1							
			NLGI NO.2							
Radiator (reservoir tank)	Mixture of antifreeze and soft water★1	100 (26.4)	Ethylene glycol base permanent type (50 : 50)							
			★Ethylene glycol base permanent type (60 : 40)							

**SAE** : Society of Automotive Engineers

**API** : American Petroleum Institute

**ISO** : International Organization for Standardization

**NLGI** : National Lubricating Grease Institute

**ASTM** : American Society of Testing and Material

★ : Cold region

Russia, CIS, Mongolia