
SECTION 5 MECHATRONICS SYSTEM

Group	1	Outline	5-1
Group	2	Mode Selection System	5-3
Group	3	Automatic Deceleration System	5-6
Group	4	Power Boost System	5-7
Group	5	Travel Speed Control System	5-8
Group	6	Automatic Warming Up Function	5-9
Group	7	Engine Overheat Prevention Function	5-10
Group	8	Anti-Restart System	5-11
Group	9	Self-Diagnostic System	5-12
Group	10	Engine Control System	5-15
Group	11	EPPR(Electro Proportional Pressure Reducing) Valve	5-22
Group	12	Monitoring System	5-25


GROUP 1 OUTLINE

The NEW CAPO(Computer Aided Power Optimization) system controls engine and pump mutual power at an optimum and less fuel consuming state for the selected work by mode selection, autodeceleration, power boost function, etc. It monitors machine conditions, for instance, engine speed, coolant temperature, hydraulic oil temperature, and hydraulic oil pressure, etc.

It consists for a CPU controller, a cluster, an accel actuator, an EPPR valve, and other components. The CPU controller and the cluster protect themselves from over-current and high voltage input, and diagnose malfunctions caused by short or open circuit in electric system, and display error codes on the cluster.

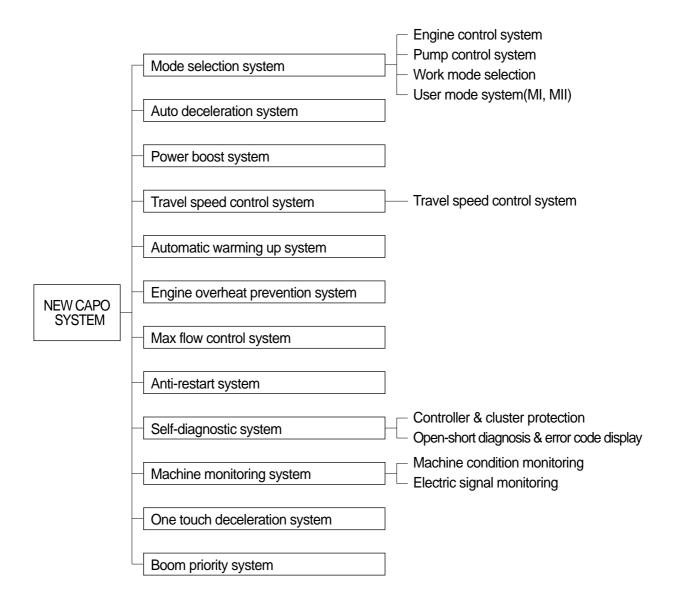

SYSTEM DIAGRAM(up to #1000)

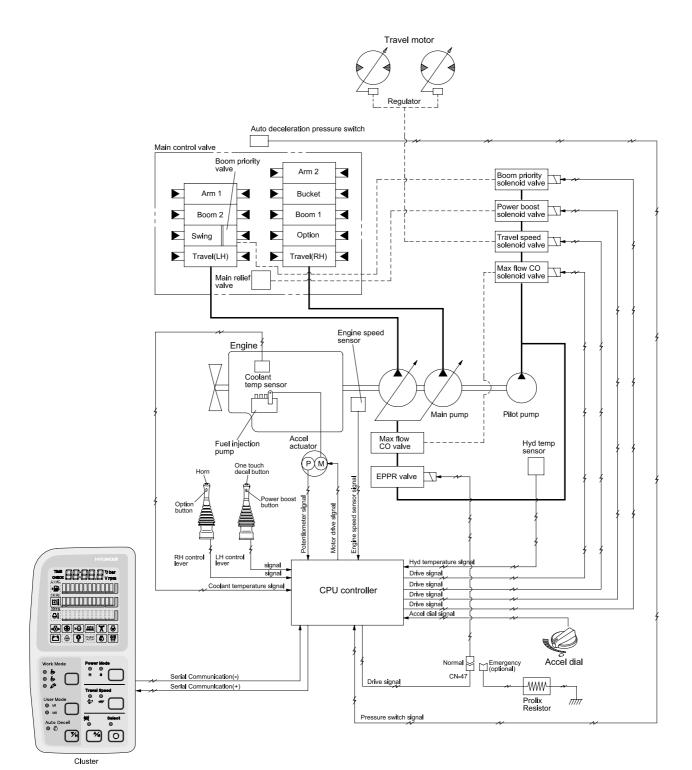

21075MS51