


GROUP 7 ENGINE OVERHEAT PREVENTION SYSTEM

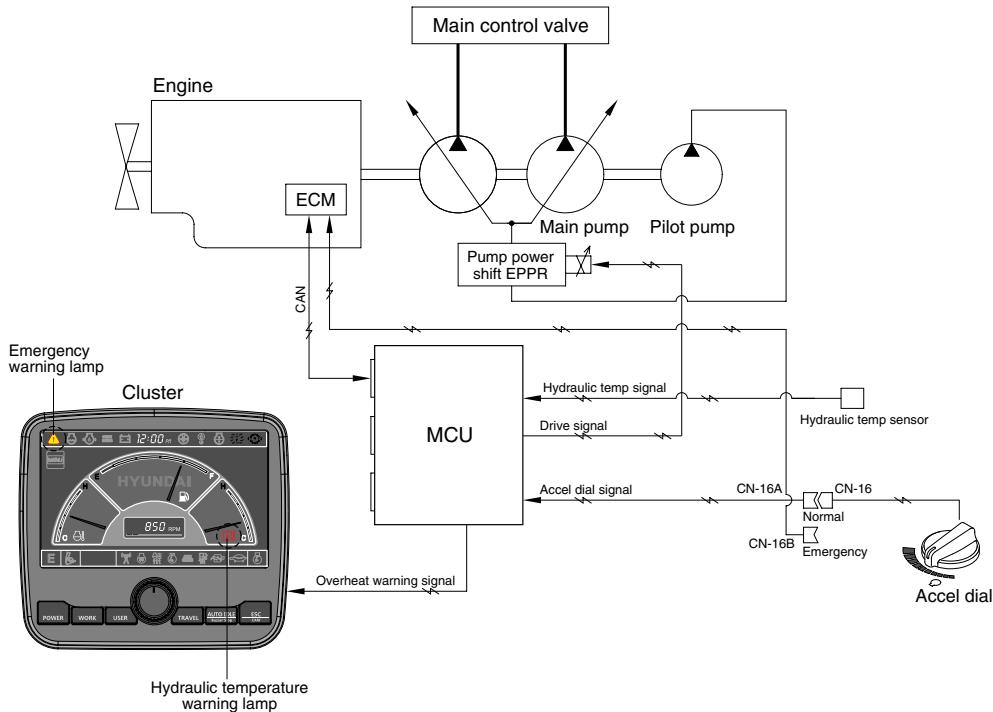

21095MS09

1. The engine coolant temperature or the hydraulic oil temperature is overheated over 100°C, the warning lamp is ON and the pump input torque or the engine speed is reduced as below logic table.

2. LOGIC TABLE

Description		Condition	Function
First step warning	Activated	<ul style="list-style-type: none"> - Coolant temperature : Above 103°C - Hydraulic oil temperature : Above 100°C 	<ul style="list-style-type: none"> - Warning lamp : ON , buzzer : OFF - Pump input torque is reduced.
	Canceled	<ul style="list-style-type: none"> - Coolant temperature : Less than 100°C - Hydraulic oil temperature : Less than 95°C 	<ul style="list-style-type: none"> - Warning lamp & buzzer : ON - Pump input torque is reduced.
Second step warning	Activated	<ul style="list-style-type: none"> - Coolant or hydraulic oil temperature : Above 105°C 	<ul style="list-style-type: none"> - Emergency warning lamp pops up on the center of LCD and the buzzer sounds. - Engine speed is reduced after 10 seconds.
	Canceled	<ul style="list-style-type: none"> - Coolant temperature : Less than 103°C - Hydraulic oil temperature : Less than 100°C 	<ul style="list-style-type: none"> - Return to pre-set the engine speed. - Hold pump input torque on the first step warning.