

SECTION 1 GENERAL



Group 1 Safety Hints	1-1
Group 2 Specifications	1-10

SECTION 1 GENERAL


GROUP 1 SAFETY

FOLLOW SAFE PROCEDURE

Unsafe work practices are dangerous. Understand service procedure before doing work; Do not attempt shortcuts.

WEAR PROTECTIVE CLOTHING


Wear close fitting clothing and safety equipment appropriate to the job.

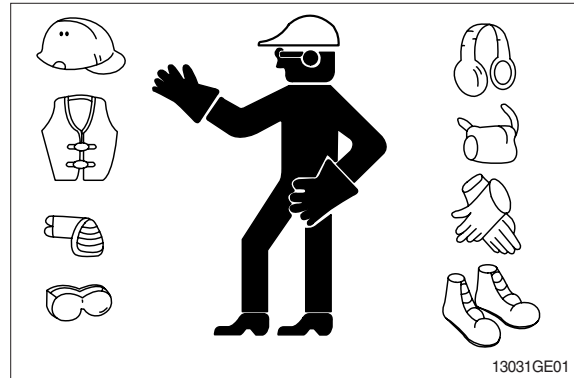

WARN OTHERS OF SERVICE WORK

Unexpected machine movement can cause serious injury.

Before performing any work on the excavator, attach a 「Do Not Operate」 tag on the right side control lever.

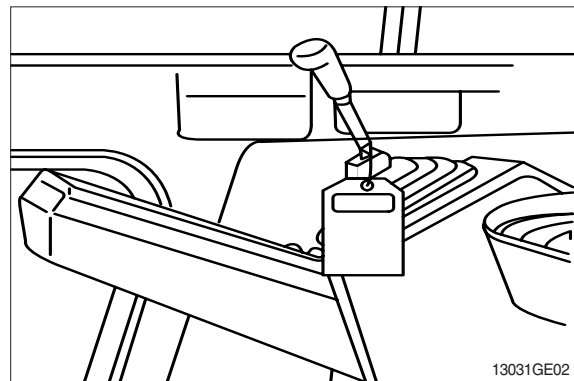


USE HANDHOLDS AND STEPS

Falling is one of the major causes of personal injury.

When you get on and off the machine, always maintain a three point contact with the steps and handrails and face the machine. Do not use any controls as handholds.

Never jump on or off the machine. Never mount or dismount a moving machine.

Be careful of slippery conditions on platforms, steps, and handrails when leaving the machine.

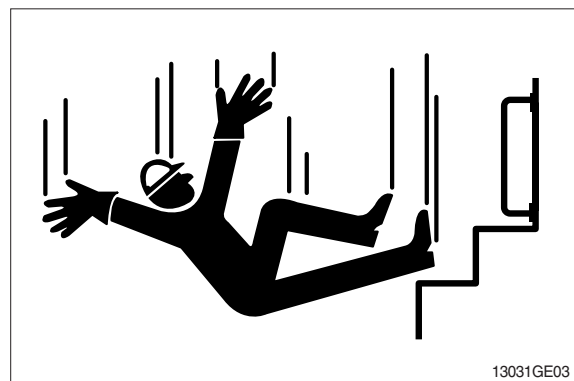


PREPARE FOR EMERGENCIES

Be prepared if a fire starts.


Keep a first aid kit and fire extinguisher handy.

Keep emergency numbers for doctors, ambulance service, hospital, and fire department near your telephone.

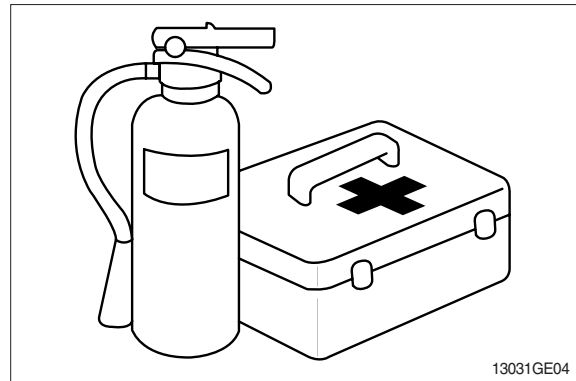

PROTECT AGAINST FLYING DEBRIS


Guard against injury from flying pieces of metal or debris; Wear goggles or safety glasses.

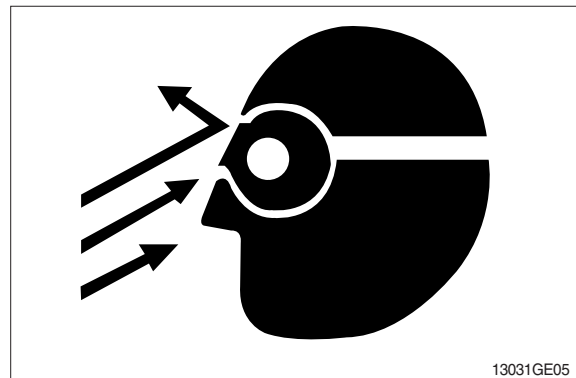

PROTECT AGAINST NOISE

Prolonged exposure to loud noise can cause impairment or loss of hearing.


Wear a suitable hearing protective device such as earmuffs or earplugs to protect against objectionable or uncomfortable loud noises.

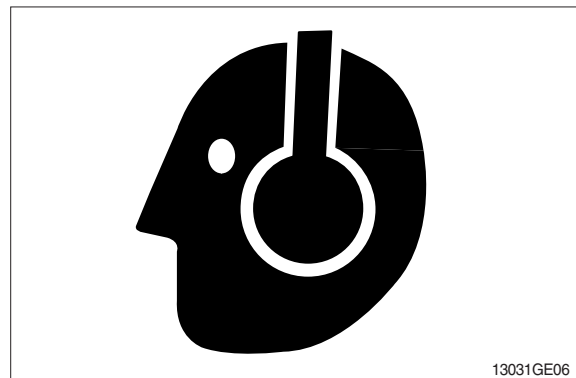

AVOID POWER LINES

Serious injury or death can result from contact with electric lines.


Never move any part of the machine or load closer to electric line than 3m(10ft) plus twice the line insulator length.

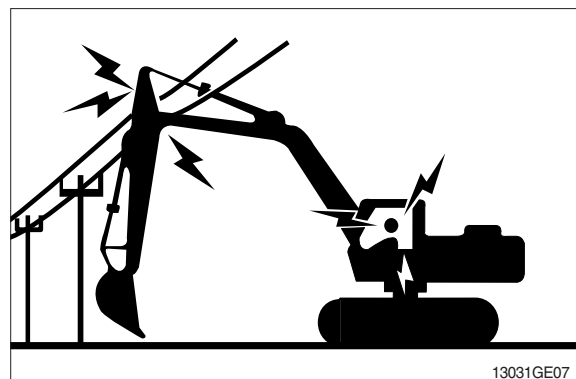

KEEP RIDERS OFF EXCAVATOR

Only allow the operator on the excavator. Keep riders off.

Riders on excavator are subject to injury such as being struck by foreign objects and being thrown off the excavator. Riders also obstruct the operator's view resulting in the excavator being operated in an unsafe manner.

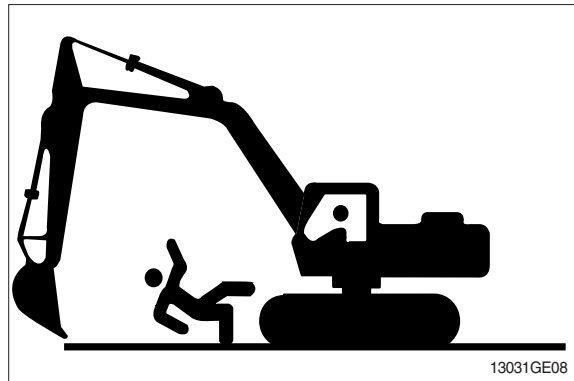


MOVE AND OPERATE MACHINE SAFELY

Bystanders can be run over. Know the location of bystanders before moving, swinging, or operating the machine.

Always keep the travel alarm in working condition. It warns people when the excavator starts to move.

Use a signal person when moving, swinging, or operating the machine in congested areas. Coordinate hand signals before starting the excavator.

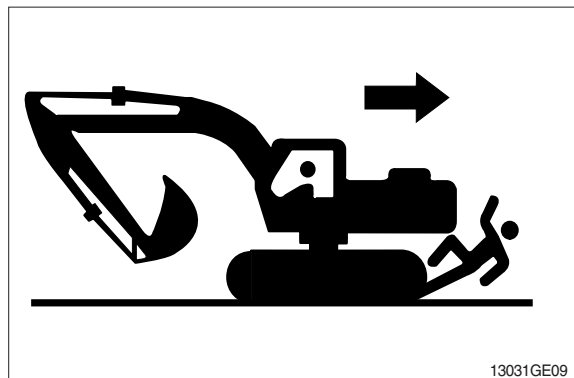

OPERATE ONLY FROM OPERATOR'S SEAT

Avoid possible injury machine damage. Do not start engine by shorting across starter terminals.

NEVER start engine while standing on ground. Start engine only from operator's seat.



PARK MACHINE SAFELY

Before working on the machine:


- Park machine on a level surface.
- Lower bucket to the ground.
- Turn auto idle switch off.
- Run engine at 1/2 speed without load for 2 minutes.
- Turn key switch to OFF to stop engine. Remove key from switch.
- Move pilot control shutoff lever to locked position.
- Allow engine to cool.

SUPPORT MACHINE PROPERLY

Always lower the attachment or implement to the ground before you work on the machine. If you must work on a lifted machine or attachment, securely support the machine or attachment.

Do not support the machine on cinder blocks, hollow tiles, or props that may crumble under continuous load.


Do not work under a machine that is supported solely by a jack. Follow recommended procedures in this manual.

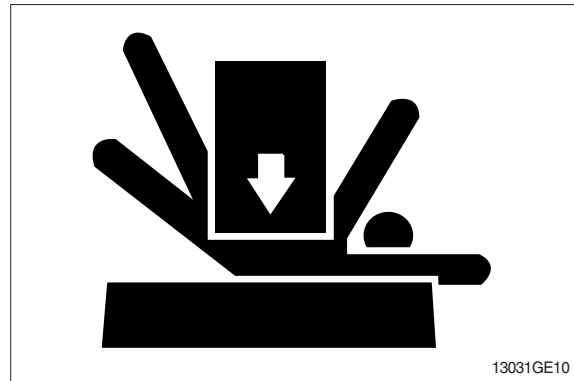

SERVICE COOLING SYSTEM SAFELY

Explosive release of fluids from pressurized cooling system can cause serious burns.

Shut off engine. Only remove filler cap when cool enough to touch with bare hands.

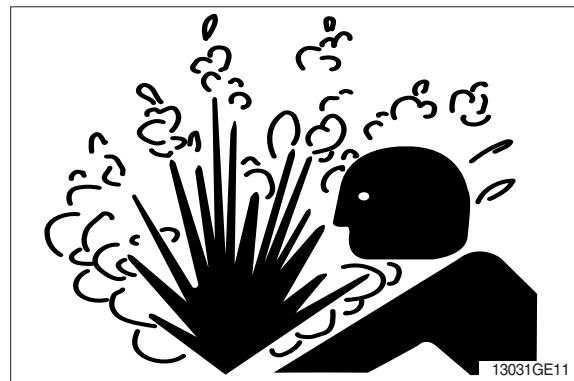

HANDLE FLUIDS SAFELY-AVOID FIRES


Handle fuel with care; It is highly flammable. Do not refuel the machine while smoking or when near open flame or sparks. Always stop engine before refueling machine. Fill fuel tank outdoors.



Store flammable fluids away from fire hazards. Do not incinerate or puncture pressurized containers.

Make sure machine is clean of trash, grease, and debris.

Do not store oily rags; They can ignite and burn spontaneously.

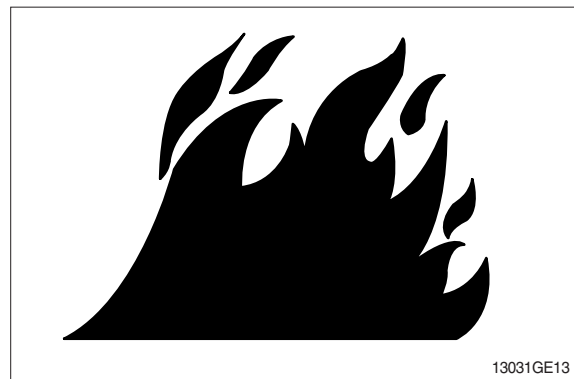

BEWARE OF EXHAUST FUMES

Prevent asphyxiation. Engine exhaust fumes can cause sickness or death.

If you must operate in a building, be positive there is adequate ventilation. Either use an exhaust pipe extension to remove the exhaust fumes or open doors and windows to bring enough outside air into the area.

REMOVE PAINT BEFORE WELDING OR HEATING

Avoid potentially toxic fumes and dust.

Hazardous fumes can be generated when paint is heated by welding, soldering, or using a torch.



Do all work outside or in a well ventilated area. Dispose of paint and solvent properly.

Remove paint before welding or heating:

- If you sand or grind paint, avoid breathing the dust.
Wear an approved respirator.
- If you use solvent or paint stripper, remove stripper with soap and water before welding. Remove solvent or paint stripper containers and other flammable material from area. Allow fumes to disperse at least 15 minutes before welding or heating.

ILLUMINATE WORK AREA SAFELY


Illuminate your work area adequately but safely. Use a portable safety light for working inside or under the machine. Make sure the bulb is enclosed by a wire cage. The hot filament of an accidentally broken bulb can ignite spilled fuel or oil.

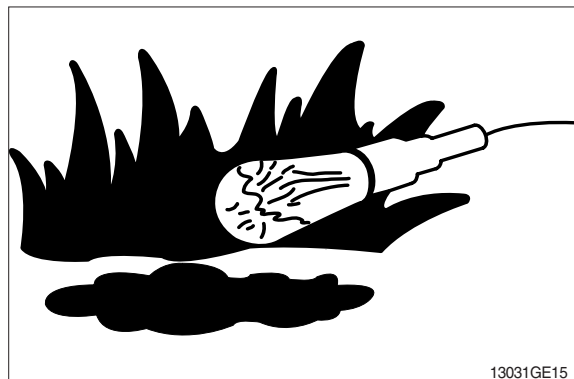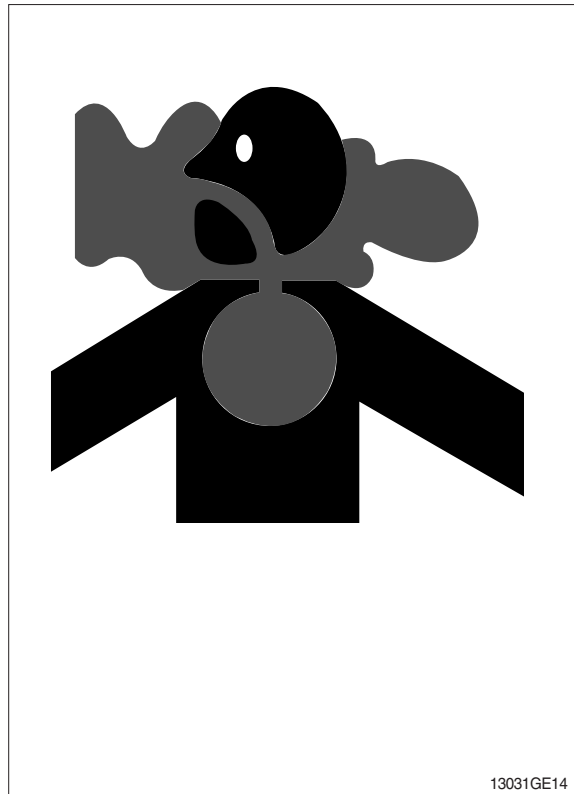

SERVICE MACHINE SAFELY

Tie long hair behind your head. Do not wear a necktie, scarf, loose clothing or necklace when you work near machine tools or moving parts. If these items were to get caught, severe injury could result.


Remove rings and other jewelry to prevent electrical shorts and entanglement in moving parts.

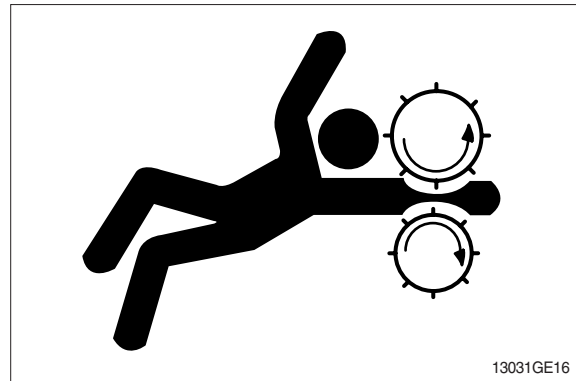

STAY CLEAR OF MOVING PARTS

Entanglements in moving parts can cause serious injury.

To prevent accidents, use care when working around rotating parts.

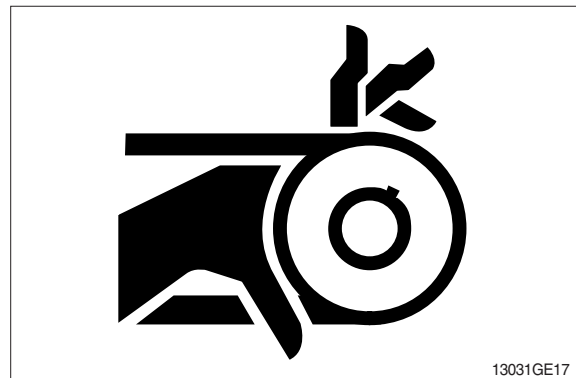


AVOID HIGH PRESSURE FLUIDS

Escaping fluid under pressure can penetrate the skin causing serious injury.

Avoid the hazard by relieving pressure before disconnecting hydraulic or other lines. Tighten all connections before applying pressure.

Search for leaks with a piece of cardboard. Protect hands and body from high pressure fluids.

If an accident occurs, see a doctor immediately. Any fluid injected into the skin must be surgically removed within a few hours or gangrene may result.

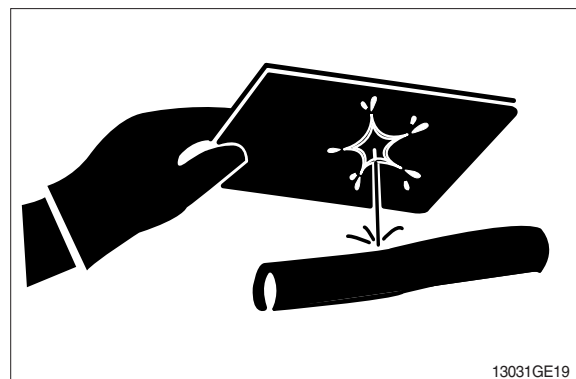

AVOID HEATING NEAR PRESSURIZED FLUID LINES

Flammable spray can be generated by heating near pressurized fluid lines, resulting in severe burns to yourself and bystanders. Do not heat by welding, soldering, or using a torch near pressurized fluid lines or other flammable materials.

Pressurized lines can be accidentally cut when heat goes beyond the immediate flame area. Install fire resisting guards to protect hoses or other materials.



PREVENT BATTERY EXPLOSIONS

Keep sparks, lighted matches, and flame away from the top of battery. Battery gas can explode.

Never check battery charge by placing a metal object across the posts. Use a volt-meter or hydrometer.

Do not charge a frozen battery; It may explode. Warm battery to 16°C (60°F).



PREVENT ACID BURNS

Sulfuric acid in battery electrolyte is poisonous. It is strong enough to burn skin, eat holes in clothing, and cause blindness if splashed into eyes.

Avoid the hazard by:

1. Filling batteries in a well-ventilated area.
2. Wearing eye protection and rubber gloves.
3. Avoiding breathing fumes when electrolyte is added.
4. Avoiding spilling or dripping electrolyte.
5. Use proper jump start procedure.

If you spill acid on yourself:

1. Flush your skin with water.
2. Apply baking soda or lime to help neutralize the acid.
3. Flush your eyes with water for 10-15 minutes. Get medical attention immediately.

If acid is swallowed:

1. Drink large amounts of water or milk.
2. Then drink milk of magnesia, beaten eggs, or vegetable oil.
3. Get medical attention immediately.



USE TOOLS PROPERLY

Use tools appropriate to the work. Makeshift tools, parts, and procedures can create safety hazards.

Use power tools only to loosen threaded tools and fasteners.

For loosening and tightening hardware, use the correct size tools. **DO NOT** use U.S. measurement tools on metric fasteners. Avoid bodily injury caused by slipping wrenches.

Use only recommended replacement parts. (See Parts catalogue.)

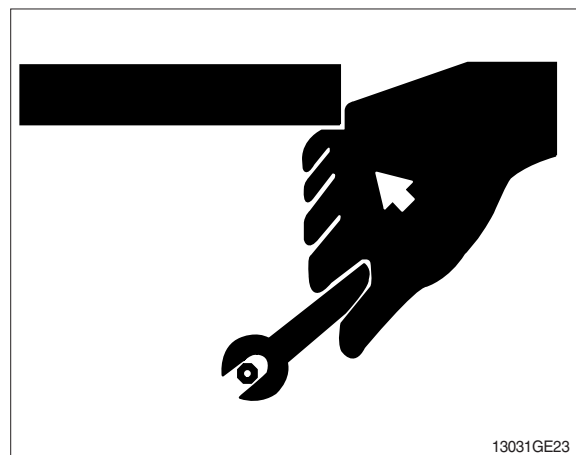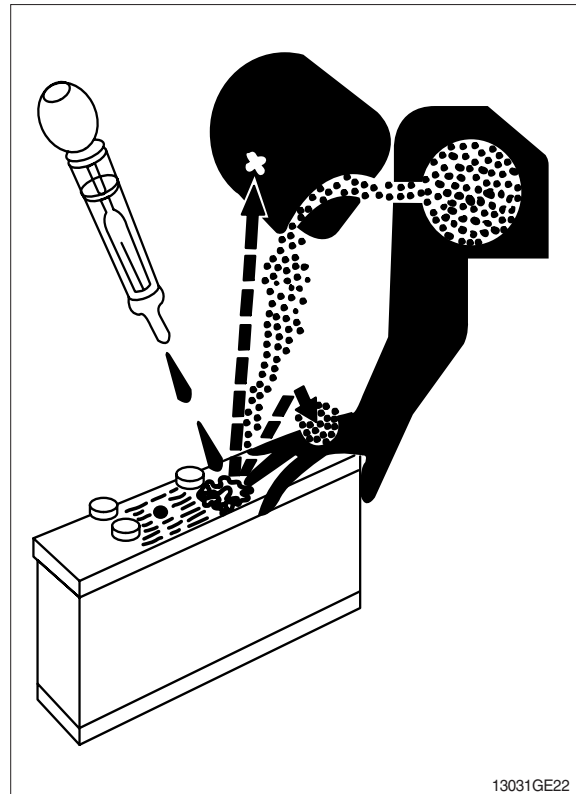


DISPOSE OF FLUIDS PROPERLY

Improperly disposing of fluids can harm the environment and ecology. Before draining any fluids, find out the proper way to dispose of waste from your local environmental agency.


Use proper containers when draining fluids. Do not use food or beverage containers that may mislead someone into drinking from them.

DO NOT pour oil into the ground, down a drain, or into a stream, pond, or lake. Observe relevant environmental protection regulations when disposing of oil, fuel, coolant, brake fluid, filters, batteries, and other harmful waste.

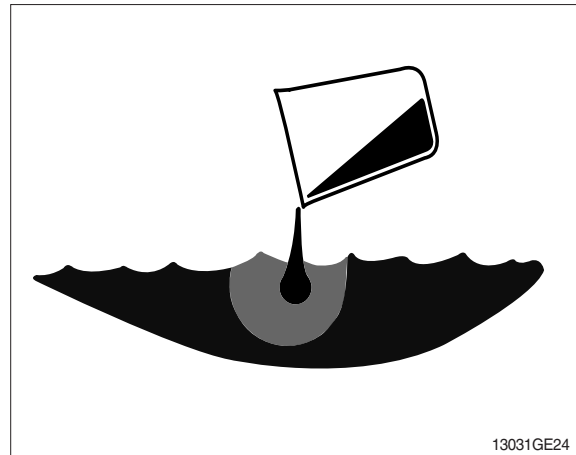

REPLACE SAFETY SIGNS

Replace missing or damaged safety signs. See the machine operator's manual for correct safety sign placement.

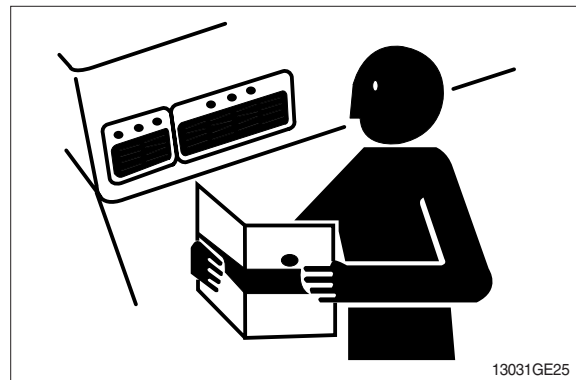


LIVE WITH SAFETY

Before returning machine to customer, make sure machine is functioning properly, especially the safety systems. Install all guards and shields.


GROUP 2 SPECIFICATIONS

1. MAJOR COMPONENT

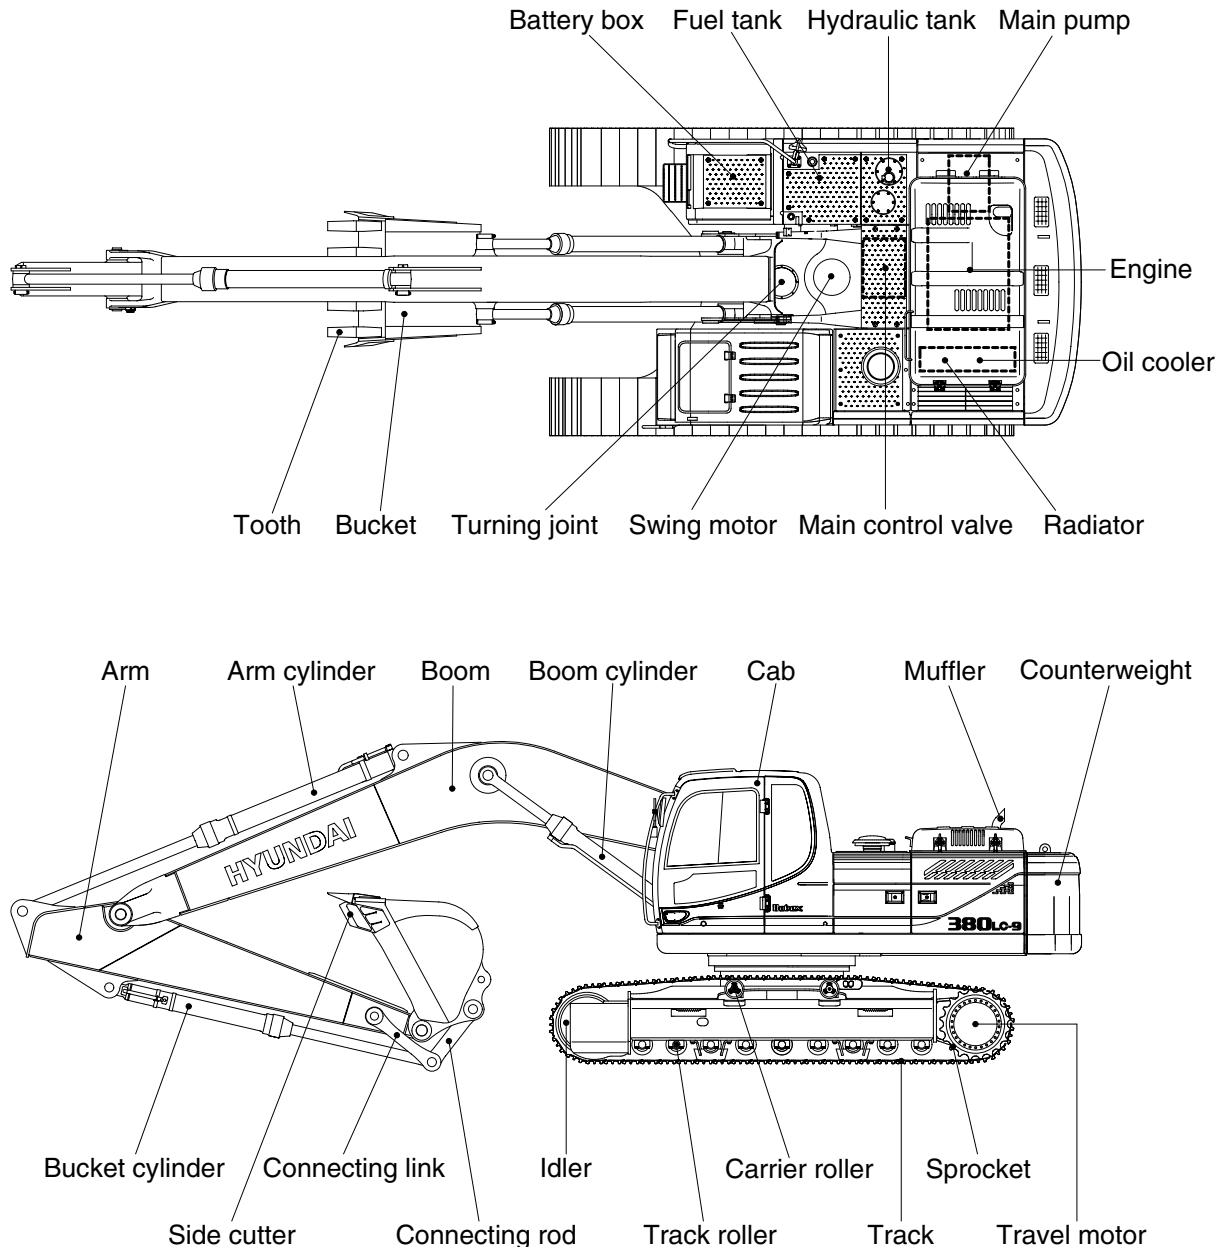

38092SP01

2. SPECIFICATIONS

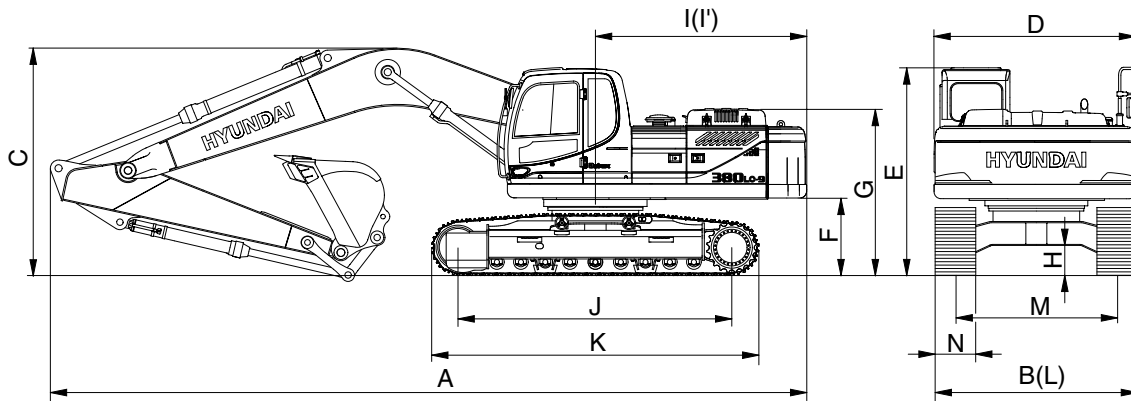


38092SP02

Description		Unit	Specification
Operating weight		kg (lb)	38200 (84220)
Bucket capacity (SAE heaped), standard		m ³ (yd ³)	1.62 (2.12)
Overall length	A	mm (ft-in)	11120 (36' 6")
Overall width, with 600 mm shoe	B		3340 (10'11")
Overall height	C		3450 (11' 4")
Superstructure width	D		2980 (9' 9")
Overall height of cab	E		3175 (10' 5")
Ground clearance of counterweight	F		1290 (4' 3")
Engine cover height	G		3190 (10' 6")
Minimum ground clearance	H		550 (1' 10")
Rear-end distance	I		3350 (11' 1")
Rear-end swing radius	I'		3415 (11' 2")
Distance between tumblers	J		4340 (14' 3")
Undercarriage length	K		5280 (17' 4")
Undercarriage width	L		3340 (11' 0")
Track gauge	M		2740 (9' 0")
Track shoe width, standard	N		600 (24")
Travel speed (low/high)		km/hr (mph)	3.0/4.8 (1.9/3.0)
Swing speed		rpm	9.3
Gradeability		Degree (%)	35 (70)
Ground pressure (600 mm shoe)		kgf/cm ² (psi)	0.68 (9.67)
Max traction force		kg (lb)	32000 (70550)

3. WORKING RANGE

1) 6.5 m (21' 4") BOOM

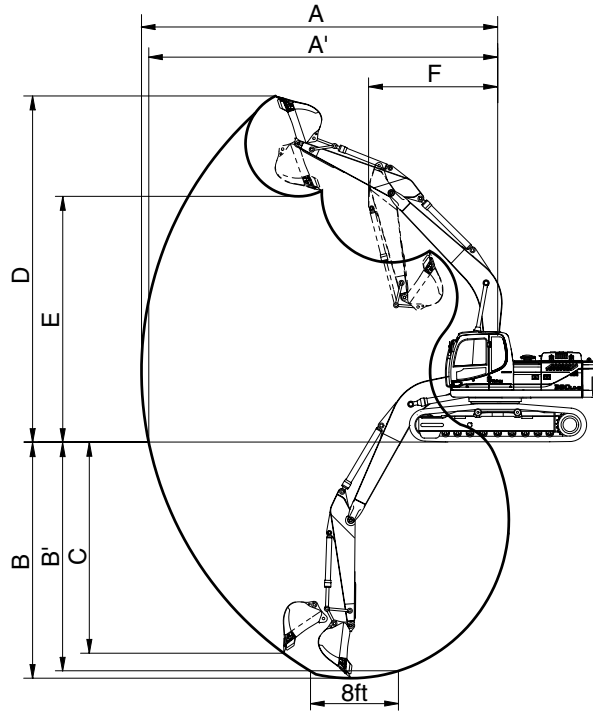


38092SP03

Description		2.5 m (8' 2") Arm	*3.2 m (10' 6") Arm	3.9 m (12' 10") Arm	4.3 m (14' 1") Arm
Max digging reach	A	10720 mm (35' 2")	11250 mm (36'11")	11870 mm (38'11")	12380 mm (40' 7")
Max digging reach on ground	A'	10490 mm (34' 5")	11040 mm (36' 3")	11670 mm (38' 3")	12180 mm (40' 0")
Max digging depth	B	6820 mm (22' 5")	7520 mm (24' 8")	8220 mm (27' 0")	8620 mm (28' 3")
Max digging depth (8ft level)	B'	6640 mm (21' 9")	7360 mm (24' 2")	8080 mm (26' 6")	8490 mm (27'10")
Max vertical wall digging depth	C	5930 mm (19' 5")	6330 mm (20' 9")	7040 mm (23' 1")	7540 mm (24' 9")
Max digging height	D	10590 mm (34' 9")	10570 mm (34' 8")	10800 mm (35' 5")	11360 mm (37' 3")
Max dumping height	E	7370 mm (24' 2")	7410 mm (24' 4")	7640 mm (25' 1")	8160 mm (26' 9")
Min swing radius	F	4530 mm (14'10")	4450 mm (14' 7")	4440 mm (14' 7")	4460 mm (14' 8")
Bucket digging force	SAE	201.0 [219.3] kN	201.0 [219.3] kN	201.0 [219.3] kN	201.0 [219.3] kN
		20500 [22360] kgf	20500 [22360] kgf	20500 [22360] kgf	20500 [22360] kgf
		45190 [49300] lbf	45190 [49300] lbf	45190 [49300] lbf	45190 [49300] lbf
	ISO	228.5 [249.3] kN	228.5 [249.3] kN	228.5 [249.3] kN	228.5 [249.3] kN
		23300 [25420] kgf	23300 [25420] kgf	23300 [25420] kgf	23300 [25420] kgf
		51370 [56040] lbf	51370 [56040] lbf	51370 [56040] lbf	51370 [56040] lbf
Arm crowd force	SAE	184.4 [201.1] kN	152.0 [165.8] kN	135.3 [147.6] kN	124.5 [135.9] kN
		18800 [20510] kgf	15500 [16910] kgf	13800 [15050] kgf	12700 [13850] kgf
		41450 [45220] lbf	34170 [37280] lbf	30420 [33190] lbf	28000 [30550] lbf
	ISO	192.2 [209.7] kN	156.9 [171.2] kN	139.3 [151.9] kN	128.5 [140.1] kN
		19600 [21380] kgf	16000 [17450] kgf	14200 [15490] kgf	13100 [14290] kgf
		43210 [47140] lbf	35270 [38480] lbf	31310 [34160] lbf	28880 [31510] lbf

[] : Power boost * : STD

· 6.15 m (20' 2") BOOM

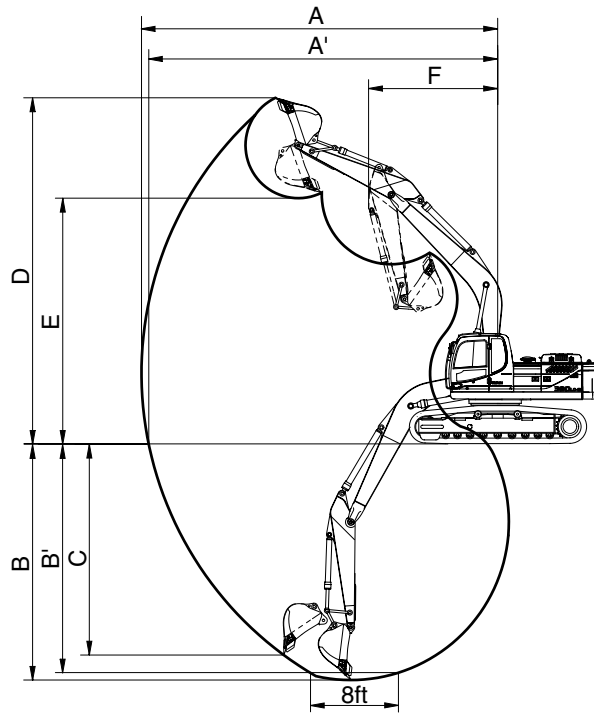


38092SP03

Description		2.5 m (8' 2") Arm	
Max digging reach	A	10330 mm (33'11")	
Max digging reach on ground	A'	10100 mm (33' 2")	
Max digging depth	B	6450 mm (21' 2")	
Max digging depth (8ft level)	B'	6270 mm (20' 7")	
Max vertical wall digging depth	C	5490 mm (18' 0")	
Max digging height	D	10320 mm (33'10")	
Max dumping height	E	7120 mm (23' 4")	
Min swing radius	F	4220 mm (13'10")	
Bucket digging force	SAE	201.0 [219.3] kN	
		20500 [22360] kgf	
		45190 [49300] lbf	
	ISO	228.5 [249.3] kN	
		23300 [25420] kgf	
		51370 [56040] lbf	
Arm crowd force	SAE	184.4 [201.1] kN	
		18800 [20510] kgf	
		41450 [45220] lbf	
	ISO	192.2 [209.7] kN	
		19600 [21380] kgf	
		43210 [47140] lbf	

[] : Power boost

• 8.3 m (28' 3") BOOM

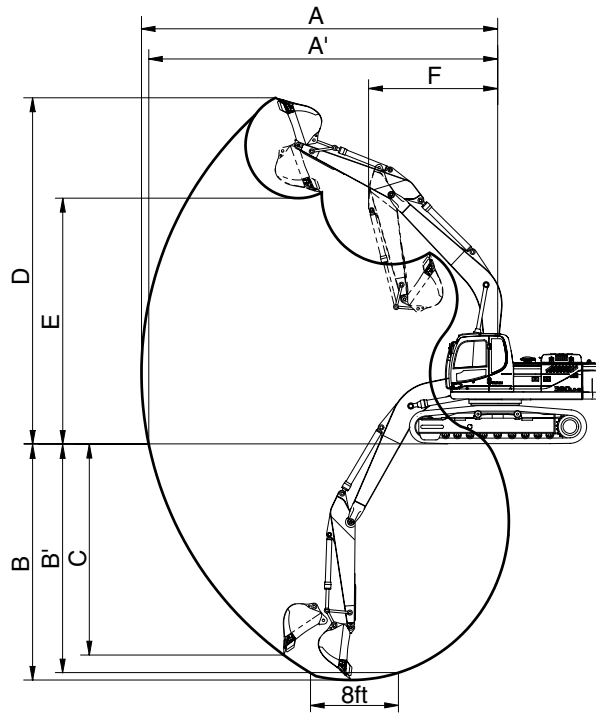

38092SP03

Description		5.1 m (16' 9") Arm	
Max digging reach	A	15280 mm (50' 2")	
Max digging reach on ground	A'	15120 mm (49' 7")	
Max digging depth	B	11230 mm (36' 10")	
Max digging depth (8ft level)	B'	11120 mm (36' 6")	
Max vertical wall digging depth	C	10060 mm (33' 0")	
Max digging height	D	13350 mm (43' 10")	
Max dumping height	E	10150 mm (33' 4")	
Min swing radius	F	5900 mm (19' 4")	
Bucket digging force	SAE	201.0 [220.4] kN	
		20500 [22470] kgf	
		45190 [49550] lbf	
	ISO	228.5 [250.3] kN	
		23300 [25530] kgf	
		51370 [56280] lbf	
Arm crowd force	SAE	109.8 [119.8] kN	
		11200 [12220] kgf	
		24690 [26930] lbf	
	ISO	112.8 [123.0] kN	
		11500 [12550] kgf	
		25350 [27650] lbf	

[] : Power boost

















4. WEIGHT

Item	R380LC-9		
	kg	lb	
Upperstructure assembly	15040	33160	
Main frame weld assembly	2995	6600	
Engine assembly	740	1630	
Main pump assembly	190	420	
Main control valve assembly	340	750	
Swing motor assembly	360	790	
Hydraulic oil tank assembly	340	750	
Fuel tank assembly	230	510	
Counterweight	6.5, 6.15 m boom	6500	14330
	8.6 m boom	8100	17860
Cab assembly	490	1080	
Lower chassis assembly	14310	31550	
Track frame weld assembly	5415	11940	
Swing bearing	590	1300	
Travel motor assembly	400	880	
Turning joint	65	140	
Track recoil spring and idler	270	600	
Idler	230	510	
Carrier roller	40	90	
Track roller	80	180	
Track-chain assembly (600 mm standard triple grouser shoe)	2420	5340	
Front attachment assembly (6.5 m boom, 3.2 m arm, 1.62 m ³ SAE heaped bucket)	7670	16910	
6.5 m boom assembly	2930	6460	
3.2 m arm assembly	1340	2950	
1.62 m ³ SAE heaped bucket	1280	2820	
Boom cylinder assembly	370	820	
Arm cylinder assembly	490	1080	
Bucket cylinder assembly	320	710	
Bucket control linkage assembly	370	820	

5. LIFTING CAPACITIES

1) 6.5 m (21' 4") boom, 3.2 m (10' 6") arm equipped with 1.62 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoe and 6500 kg (14330 lb) counterweight.

-  : Rating over-front
-  : Rating over-side or 360 degree

Load point height		Load radius												At max. reach			
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		9.0 m (30.0 ft)		Capacity		Reach	
																	
9.0 m (30 ft)	kg lb														*5950 *13120	*5950 *13120	7.97 (26.1)
7.5 m (25.0 ft)	kg lb								*4560 *10050	*4560 *10050					*6020 *13270	4820 10630	9.12 (29.9)
6.0 m (20.0 ft)	kg lb								*6620 *14590	*6620 *14590					*6110 *13470	4010 8840	9.87 (32.4)
4.5 m (15.0 ft)	kg lb						*8260 *18210	*8260 *18210	*7320 *16140	6530 14400	*4450 *9810	*4450 *9810	*6190 *13650	3550 7830	10.32 (33.9)		
3.0 m (10.0 ft)	kg lb				*13520 *29810	*13520 *29810	*9960 *21960	8910 19640	*8240 *18170	6150 13560	*6360 *14020	4430 9770	5940 13100	3310 7300	10.50 (34.4)		
1.5 m (5.0 ft)	kg lb				*16390 *36130	12870 28370	*11570 *25510	8270 18230	*9170 *20220	5790 12760	*7510 *16560	4230 9330	5890 12990	3250 7170	10.45 (34.3)		
Ground Line	kg lb			*13090 *28860	*13090 *28860	*17880 *39420	12230 26960	*12690 *27980	7820 17240	*9880 *21780	5520 12170	*7070 *15590	4090 9020	6130 13510	3380 7450	10.14 (33.3)	
-1.5 m (-5.0 ft)	kg lb	*13720 *30250	*13720 *30250	*17520 *38620	*17520 *38620	*18150 *40010	12020 26500	*13170 *29030	7600 16760	9750 21500	5370 11840			6730 14840	3740 8250	9.57 (31.4)	
-3.0 m (-10.0 ft)	kg lb	*17880 *39420	*17880 *39420	*22800 *50270	*22800 *50270	*17430 *38430	12080 26630	*12880 *28400	7580 16710	9750 21500	5370 11840			*7730 *17040	4490 9900	8.65 (28.4)	
-4.5 m (-15.0 ft)	kg lb	*22600 *49820	*22600 *49820	*21880 *48240	*21880 *48240	*15520 *34220	12390 27320	*11510 *25380	7790 17170					*7690 *16950	6200 13670	7.25 (23.8)	
-6.0 m (-20.0 ft)	kg lb					*11410 *25150	*11410 *25150										

- Note
1. Lifting capacity are based on SAE J1097 and ISO 10567.
 2. Lifting capacity of the ROBEX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
 3. The load point is a hook located on the back of the bucket.
 4. *indicates load limited by hydraulic capacity.

(2) 6.15 m (20' 2") boom, 2.5 m (8' 2") arm equipped with 1.62 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoe and 6500 kg (14330 lb) counterweight.






Load point height		Load radius								At max. reach		
		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		Capacity		Reach
												m (ft)
9.0 m (30.0 ft)	kg lb									*7580 *16710	*7580 *16710	6.65 (21.8)
7.5 m (25.0 ft)	kg lb									*7420 *16360	6190 13650	8.02 (26.3)
6.0 m (20.0 ft)	kg lb					*8590 *18940	*8590 *18940	*6510 *14350	*6510 *14350	*7460 *16450	4980 10980	8.88 (29.1)
4.5 m (15.0 ft)	kg lb	*18270 *40280	*18270 *40280	*12170 *26830	*12170 *26830	*9790 *21580	9680 21340	*8620 *19000	6560 14460	7480 16490	4350 9590	9.38 (30.8)
3.0 m (10.0 ft)	kg lb			*15380 *33910	14190 31280	*11300 *24910	9030 19910	*9350 *20610	6250 13780	7050 15540	4040 8910	9.58 (31.4)
1.5 m (5.0 ft)	kg lb			*17740 *39110	13080 28840	*12640 *27870	8450 18630	*10060 *22180	5940 13100	7010 15450	3980 8770	9.52 (31.2)
Ground Line	kg lb	*13400 *29540	*13400 *29540	*18580 *40960	12560 27690	*13410 *29560	8060 17770	10120 22310	5710 12590	7360 16230	4170 9190	9.19 (30.2)
-1.5 m (-5.0 ft)	kg lb	*21020 *46340	*21020 *46340	*18170 *40060	12420 27380	*13400 *29540	7880 17370	10010 22070	5610 12370	8290 18280	4710 10380	8.53 (28.0)
-3.0 m (-10 ft)	kg lb	*22960 *50620	*22960 *50620	*16580 *36550	12540 27650	*12330 *27180	7930 17480			*8180 *18030	5950 13120	7.47 (24.5)
-1.5 m (-10 ft)	kg lb	*17870 *39400	*17870 *39400	*13110 *28900	12970 28590							

(3) 8.6 m (28' 3") boom, 5.1 m (16' 9") arm equipped with 1.46 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoe and 8100 kg (17860 lb) counterweight.

Load point height		Load radius																At max. reach								
		1.5 m (5.0 ft)		3.0 m (10.0 ft)		4.5 m (15.0 ft)		6.0 m (20.0 ft)		7.5 m (25.0 ft)		9.0 m (30.0 ft)		10.5 m (35.0 ft)		12.0 m (40.0 ft)		13.5 m (45.0 ft)		Capacity		Reach				
																						m (ft)				
9.0 m (30 ft)	kg lb													*3010 *6640	*3010 *6640							*3030 *6680	2510 5530	12.91 (42.4)		
7.5 m (25.0 ft)	kg lb													*3110 *6860	*3110 *6860	*2630 *5800	*2630 *5800					*3100 *6830	2100 4630	13.61 (44.7)		
6.0 m (20.0 ft)	kg lb													*3360 *7410	*3360 *7410	*3300 *7280	2820 6220					*3180 *7010	1820 4010	14.10 (46.3)		
4.5 m (15.0 ft)	kg lb												*4100 *9040	*4100 *9040	*3730 *8220	3670 8090	*3520 *7760	2680 5910					*3290 *7250	1640 3620	14.40 (47.2)	
3.0 m (10.0 ft)	kg lb					*10920 *24070	*10920 *24070	*7400 *16310	*7400 *16310	*5710 *12590	*5710 *12590	*4750 *10470	4620 10190	*4160 *9170	3410 7520	*3790 *8360	2520 5560	*1720 *3790	*1720 *3790					3310 7300	1530 3370	14.53 (47.7)
1.5 m (5.0 ft)	kg lb					*10890 *24010	*10890 *24010	*8990 *19820	8120 17900	*6710 *14790	5760 12700	*5420 *11950	4230 9330	*4610 *10160	3150 6940	*4090 *9020	2350 5180	*1900 *4190	1730 3810					3270 7210	1480 3260	14.49 (47.5)
Ground Line	kg lb					*10400 *22930	*10400 *22930	*10190 *22470	7440 16400	*7560 *16670	5280 11640	*6010 *13250	3900 8600	*5030 *11090	2930 6460	*4370 *9630	2210 4870					3320 7320	1500 3310	14.28 (46.9)		
-1.5 m (-5.0 ft)	kg lb					*7990 *17610	*7990 *17610	*11720 *25840	11200 24690	*10930 *24100	7060 15560	*8180 *18030	4970 10960	*6480 *14290	3670 8090	*5370 *11840	2770 6110	4390 9680	2110 4650					3470 7650	1590 3510	13.90 (45.6)
-3.0 m (-10.0 ft)	kg lb	*8910 *19640	*8910 *19640	*10270 *22640	*10270 *22640	*13880 *30600	11160 24600	*11250 *24800	6900 15210	*8540 *18830	4800 10580	*6780 *14950	3530 7780	5420 11950	2670 5890	4340 9570	2060 4540					3760 8290	1770 3900	13.31 (43.7)		
-4.5 m (-15.0 ft)	kg lb	*11090 *24450	*11090 *24450	*12810 *28240	*12810 *28240	*15320 *33770	11300 24910	*11200 *24690	6910 15230	*8610 *18980	4760 10490	*6850 *15100	3490 7690	5400 11900	2660 5860							4230 *9330	2080 4590	12.50 (41.0)		
-6.0 m (-20.0 ft)	kg lb	*13540 *29850	*13540 *29850	*15800 *34830	*15800 *34830	*14460 *31880	11590 25550	*10750 *23700	7050 15540	*8340 *18390	4850 10690	*6630 *14620	3570 7870	*5260 *11600	2770 6110							4390 *9680	2610 5750	11.41 (37.4)		
-7.5 m (-25.0 ft)	kg lb	*16440 *36240	*16440 *36240	*18490 *40760	*18490 *40760	*12970 *28590	12050 26570	*9770 *21540	7350 16200	*7580 *16710	5080 11200	*5850 *12900	3790 8360									4450 *9810	3570 7870	9.94 (32.6)		
-9.0 m (-30.0 ft)	kg lb			*14620 *32230	*14620 *32230	*10500 *23150	*10500 *23150	*7900 *17420	7870 17350	*5800 *12790	5550 12240															

6. BUCKET SELECTION GUIDE


1) GENERAL BUCKET

				
1.46 m ³ SAE heaped bucket	※ 1.62 m ³ SAE heaped bucket	1.86 m ³ SAE heaped bucket	2.10 m ³ SAE heaped bucket	2.32 m ³ SAE heaped bucket

Capacity		Width		Weight	Recommendation					
					6.5 m (21' 4") boom				6.15 m (20' 2") boom	8.6 m (28' 3") boom
SAE heaped	CECE heaped	Without side cutter	With side cutter		2.5 m arm (8' 2")	3.2 m arm (10' 6")	3.9 m arm (12' 10")	4.3 m arm (14' 1")	2.5 m arm (8' 2")	5.1 m arm (16' 9")
1.46 m ³ (1.91 yd ³)	1.27 m ³ (1.66 yd ³)	1380 mm (54.3")	1510 mm (59.4")	1170 kg (2580 lb)						
※ 1.62 m ³ (2.12 yd ³)	1.40 m ³ (1.83 yd ³)	1440 mm (56.7")	1570 mm (61.8")	1280 kg (2820 lb)						
1.86 m ³ (2.43 yd ³)	1.60 m ³ (2.1 yd ³)	1620 mm (63.8")	1750 mm (68.9")	1390 kg (3060 lb)						
2.10 m ³ (2.75 yd ³)	1.80 m ³ (2.4 yd ³)	1810 mm (71.3")	1940 mm (76.4")	1520 kg (3350 lb)						
2.32 m ³ (3.03 yd ³)	2.00 m ³ (2.62 yd ³)	1990 mm (78.3")	2120 mm (83.5")	1760 kg (3880 lb)						



※ : Standard bucket

 Applicable for materials with density of 2000 kg/m³ (3370 lb/yd³) or less

 Applicable for materials with density of 1600 kg/m³ (2700 lb/yd³) or less

 Applicable for materials with density of 1100 kg/m³ (1850 lb/yd³) or less

2) HEAVY DUTY AND ROCK-HEAVY DUTY BUCKET

	
<p>◆ 1.62 m³ SAE heaped bucket</p>	<p>◎ 1.44 m³, 1.62 m³, 1.86 m³ SAE heaped bucket</p>

Capacity		Width		Weight	Recommendation				
					6.5 m (21' 4") boom				6.15 m (20' 2") boom
SAE heaped	CECE heaped	Without side cutter	With side cutter		2.5 m arm (8' 2")	3.2 m arm (10' 6")	3.9 m arm (12' 10")	4.3 m arm (14' 1")	2.5 m arm (8' 2")
◆ 1.62 m ³ (2.12 yd ³)	1.40 m ³ (1.83 yd ³)	1540 mm (60.6")	-	1570 kg (3460 lb)					
◎ 1.44 m ³ (1.88 yd ³)	1.27 m ³ (1.66 yd ³)	1280 mm (50.4")	-	1565 kg (3450 lb)					
◎ 1.62 m ³ (2.12 yd ³)	1.40 m ³ (1.83 yd ³)	1545 mm (60.8")	-	1610 kg (3550 lb)					
◎ 1.86 m ³ (2.43 yd ³)	1.60 m ³ (2.1 yd ³)	1725 mm (67.9")	-	1710 kg (3770 lb)					

◆ : Heavy duty bucket

◎ : Rock-heavy duty bucket

Applicable for materials with density of 2000 kg/m³ (3370 lb/yd³) or less

Applicable for materials with density of 1600 kg/m³ (2700 lb/yd³) or less


Applicable for materials with density of 1100 kg/m³ (1850 lb/yd³) or less

7. UNDERCARRIAGE

1) TRACKS

X-leg type center frame is integrally welded with reinforced box-section track frames. The design includes dry tracks, lubricated rollers, idlers, sprockets, hydraulic track adjusters with shock absorbing springs and assembled track-type tractor shoes with triple grousers.

2) TYPES OF SHOES

Model	Shapes		Triple grouser				
							
R380LC-9	Shoe width	mm (in)	600 (24)	700 (28)	750 (30)	800 (32)	900 (36)
	Operating weight	kg (lb)	38200 (84220)	38650 (85210)	38875 (85700)	39100 (86200)	39550 (87190)
	Ground pressure	kgf/cm ² (psi)	0.68 (9.67)	0.59 (8.39)	0.56 (7.96)	0.52 (7.39)	0.47 (6.68)
	Overall width	mm (ft-in)	3340 (10' 11")	3440 (11' 3")	3490 (11' 5")	3540 (11' 7")	3640 (11' 11")

3) NUMBER OF ROLLERS AND SHOES ON EACH SIDE

Item	Quantity
Carrier rollers	2 EA
Track rollers	9 EA
Track shoes	51 EA

4) SELECTION OF TRACK SHOE

Suitable track shoes should be selected according to operating conditions.

Method of selecting shoes

Confirm the category from the list of applications in **table 2**, then use **table 1** to select the shoe. Wide shoes (categories B and C) have limitations on applications. Before using wide shoes, check the precautions, then investigate and study the operating conditions to confirm if these shoes are suitable.

Select the narrowest shoe possible to meet the required flotation and ground pressure. Application of wider shoes than recommendations will cause unexpected problem such as bending of shoes, crack of link, breakage of pin, loosening of shoe bolts and the other various problems.

※ **Table 1**

Track shoe	Specification	Category
600 mm triple grouser	Standard	A
700 mm triple grouser	Option	B
750 mm triple grouser	Option	B
800 mm triple grouser	Option	C
900 mm triple grouser	Option	C

※ **Table 2**

Category	Applications	Applications
A	Rocky ground, river beds, normal soil	<ul style="list-style-type: none"> Travel at low speed on rough ground with large obstacles such as boulders or fallen trees
B	Normal soil, soft ground	<ul style="list-style-type: none"> These shoes cannot be used on rough ground with large obstacles such as boulders or fallen trees Travel at high speed only on flat ground Travel slowly at low speed if it is impossible to avoid going over obstacles
C	Extremely soft ground (swampy ground)	<ul style="list-style-type: none"> Use the shoes only in the conditions that the machine sinks and it is impossible to use the shoes of category A or B These shoes cannot be used on rough ground with large obstacles such as boulders or fallen trees Travel at high speed only on flat ground Travel slowly at low speed if it is impossible to avoid going over obstacles

8. SPECIFICATIONS FOR MAJOR COMPONENTS

1) ENGINE

Item	Specification
Model	Cummins QSL / HYUNDAI HE8.9
Type	4-cycle turbocharged charger air cooled diesel engine
Cooling method	Water cooling
Number of cylinders and arrangement	6 cylinders, in-line
Firing order	1-5-3-6-2-4
Combustion chamber type	Direct injection type
Cylinder bore × stroke	114 × 145 mm (4.49" × 5.70")
Piston displacement	8900 cc (540 cu in)
Compression ratio	17.8 : 1
Rated gross horse power (SAE J1995)	296 Hp at 1850 rpm (221 kW at 1850 rpm)
Maximum torque	148 kgf · m (1070 lbf · ft) at 1400 rpm
Engine oil quantity	31.7 l (8.4 U.S. gal)
Dry weight	740 kg (1630 lb)
Low idling speed	800 ± 100 rpm
High idling speed	1700 + 50 rpm
Rated fuel consumption	164.8 g/Hp · hr at 1850 rpm
Starting motor	Denso (24V-7.5 kW)
Alternator	Delco Remy 24V-50A
Battery	2 × 12V × 160Ah

2) MAIN PUMP

Item	Specification
Type	Variable displacement tandem axis piston pumps
Capacity	2 × 175 cc/rev
Maximum pressure	330 kgf/cm ² (4690 psi) [360 kgf/cm ² (5120 psi)]
Rated oil flow	2 × 306 l /min (80.8 U.S. gpm / 67.3 U.K. gpm)
Rated speed	1750 rpm

[]: Power boost

3) GEAR PUMP

Item	Specification
Type	Fixed displacement gear pump single stage
Capacity	15cc/rev
Maximum pressure	40 kgf/cm ² (570 psi)
Rated oil flow	27 ℓ /min (7.1 U.S. gpm/5.9 U.K. gpm)

4) MAIN CONTROL VALVE

Item	Specification
Type	9 spools
Operating method	Hydraulic pilot system
Main relief valve pressure	330 kgf/cm ² (4690 psi) [360 kgf/cm ² (5120 psi)]
Overload relief valve pressure	390 kgf/cm ² (5550 psi)

[]: Power boost

5) SWING MOTOR

Item	Specification	
Machine serial No.	-#0704	#0705-
Type	Axial piston motor	
Capacity	233 cc/rev	240 cc/rev
Relief pressure	290 kgf/cm ² (4120 psi)	
Braking system	Automatic, spring applied hydraulic released	
Braking torque	107 kgf · m (773 lbf · ft)	134 kgf · m (969 lbf · ft)
Brake release pressure	30~50 kgf/cm ² (427~711 psi)	26 kgf/cm ² (370 psi)
Reduction gear type	2 - stage planetary	

6) TRAVEL MOTOR

Item	Specification
Type	Variable displacement axial piston motor
Relief pressure	360 kgf/cm ² (5120 psi)
Capacity (max / min)	185.2/114.2 cc/rev
Reduction gear type	3-stage planetary
Braking system	Automatic, spring applied hydraulic released
Brake release pressure	8.5 kgf/cm ² (121 psi)
Braking torque	44.4 kgf · m (321 lbf · ft)

7) CYLINDER

Item		Specification
Boom cylinder	Bore dia × Rod dia × Stroke	∅ 160 × ∅ 110 × 1500 mm
	Cushion	Extend only
Arm cylinder	Bore dia × Rod dia × Stroke	∅ 170 × ∅ 120 × 1760 mm
	Cushion	Extend and retract
Bucket cylinder	Bore dia × Rod dia × Stroke	∅ 150 × ∅ 105 × 1295 mm
	Cushion	Extend only

※ Discoloration of cylinder rod can occur when the friction reduction additive of lubrication oil spreads on the rod surface.

※ Discoloration does not cause any harmful effect on the cylinder performance.

8) SHOE

Item		Width	Ground pressure	Link quantity	Overall width
R380LC-9	Standard	600 mm (24")	0.68 kgf/cm ² (9.67 psi)	51	3340 mm (10' 11")
	Option	700 mm (28")	0.59 kgf/cm ² (8.39 psi)	51	3440 mm (11' 3")
		750 mm (30")	0.56 kgf/cm ² (7.96 psi)	51	3490 mm (11' 5")
		800 mm (32")	0.52 kgf/cm ² (7.39 psi)	51	3540 mm (11' 7")
		900 mm (36")	0.47 kgf/cm ² (6.68 psi)	51	3640 mm (11' 11")

9) BUCKET

Item		Capacity		Tooth quantity	Width		
		SAE heaped	CECE heaped		Without side cutter	With side cutter	
R380LC-9	Standard	1.62 m ³ (2.12 yd ³)	1.40 m ³ (1.8 yd ³)	5	1440 mm (56.7")	1570 mm (61.8")	
			1.46 m ³ (1.91 yd ³)	1.27 m ³ (1.66 yd ³)	4	1380 mm (54.3")	1510 mm (59.4")
		◆	1.62 m ³ (2.12 yd ³)	1.40 m ³ (1.83 yd ³)	5	1540 mm (60.6")	-
		◎	1.44 m ³ (1.88 yd ³)	1.27 m ³ (1.66 yd ³)	5	1280 mm (50.4")	-
		◎	1.62 m ³ (2.12 yd ³)	1.40 m ³ (1.83 yd ³)	5	1545 mm (60.8")	-
		◎	1.86 m ³ (2.43 yd ³)	1.60 m ³ (2.1 yd ³)	5	1725 mm (67.9")	-
			1.86 m ³ (2.43 yd ³)	1.60 m ³ (2.1 yd ³)	5	1620 mm (63.8")	1750 mm (68.9")
			2.10 m ³ (2.75 yd ³)	1.80 m ³ (2.4 yd ³)	6	1810 mm (71.3")	1940 mm (76.4")
			2.32 m ³ (3.03 yd ³)	2.00 m ³ (2.62 yd ³)	6	1990 mm (78.3")	2120 mm (83.5")

◆ : Heavy duty bucket

◎ : Rock bucket (esco type)

9. RECOMMENDED OILS

Use only oils listed below. Do not mix different brand oil.

Please use HYUNDAI genuine oil and grease.

Service point	Kind of fluid	Capacity ℓ (U.S. gal)	Ambient temperature °C (°F)						
			-50 (-58)	-30 (-22)	-20 (-4)	-10 (14)	0 (32)	10 (50)	20 (68)
Engine oil pan	Engine oil	33.5 (8.8)	★SAE 5W-40						
			SAE 30						
			SAE 10W						
			SAE 10W-30						
			SAE 15W-40						
Swing drive	Gear oil	8.0 (2.1)	★SAE 75W-90						
Final drive		7.0×2 (1.8×2)	SAE 80W-90						
Hydraulic tank	Hydraulic oil	Tank: 210 (55.5) System: 415 (110)	★ISO VG 15						
			ISO VG 32						
			ISO VG 46						
			ISO VG 68						
Fuel tank	Diesel fuel	550 (145)	★ASTM D975 NO.1						
			ASTM D975 NO.2						
Fitting (grease nipple)	Grease	As required	★NLGI NO.1						
			NLGI NO.2						
Radiator (reservoir tank)	Mixture of antifreeze and water	50 (13.2)	Ethylene glycol base permanent type (50 : 50)						
			★Ethylene glycol base permanent type (60 : 40)						

SAE : Society of Automotive Engineers

API : American Petroleum Institute

ISO : International Organization for Standardization

NLGI : National Lubricating Grease Institute

ASTM : American Society of Testing and Material

★ : Cold region

Russia, CIS, Mongolia