

SECTION 1 GENERAL

| | |
|------------------------------|------|
| Group 1 Safety Hints | 1-1 |
| Group 2 Specifications | 1-10 |

SECTION 1 GENERAL


GROUP 1 SAFETY

FOLLOW SAFE PROCEDURE

Unsafe work practices are dangerous. Understand service procedure before doing work; Do not attempt shortcuts.

WEAR PROTECTIVE CLOTHING


Wear close fitting clothing and safety equipment appropriate to the job.

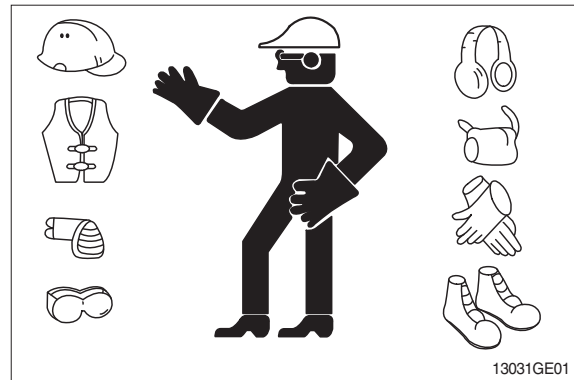

WARN OTHERS OF SERVICE WORK

Unexpected machine movement can cause serious injury.

Before performing any work on the excavator, attach a 「Do Not Operate」 tag on the right side control lever.

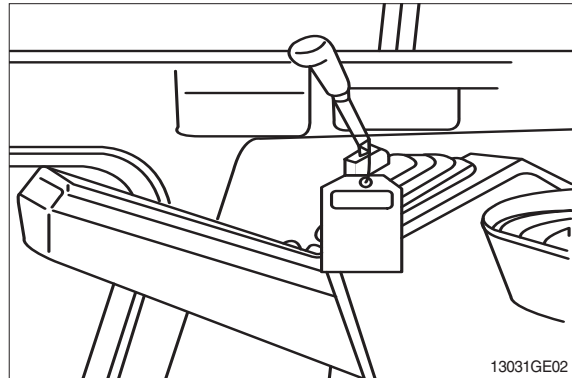


USE HANDHOLDS AND STEPS

Falling is one of the major causes of personal injury.

When you get on and off the machine, always maintain a three point contact with the steps and handrails and face the machine. Do not use any controls as handholds.

Never jump on or off the machine. Never mount or dismount a moving machine.

Be careful of slippery conditions on platforms, steps, and handrails when leaving the machine.

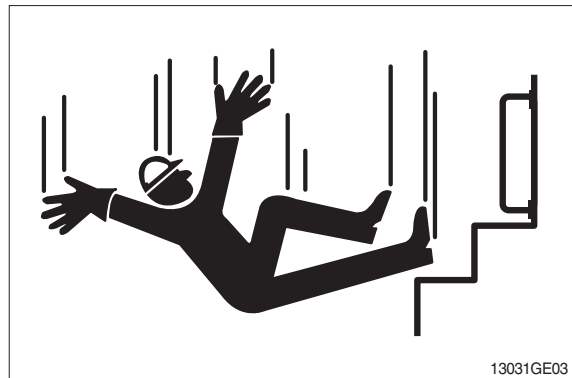


PREPARE FOR EMERGENCIES

Be prepared if a fire starts.


Keep a first aid kit and fire extinguisher handy.

Keep emergency numbers for doctors, ambulance service, hospital, and fire department near your telephone.

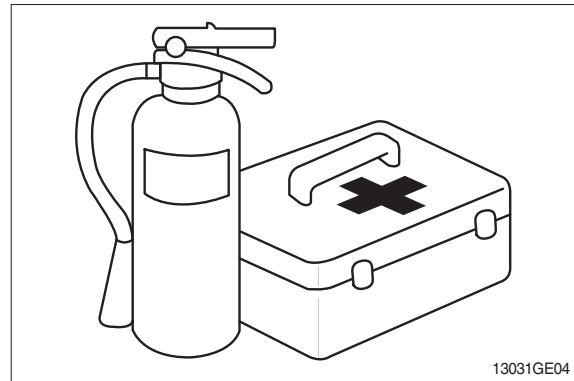

PROTECT AGAINST FLYING DEBRIS

Guard against injury from flying pieces of metal or debris; Wear goggles or safety glasses.

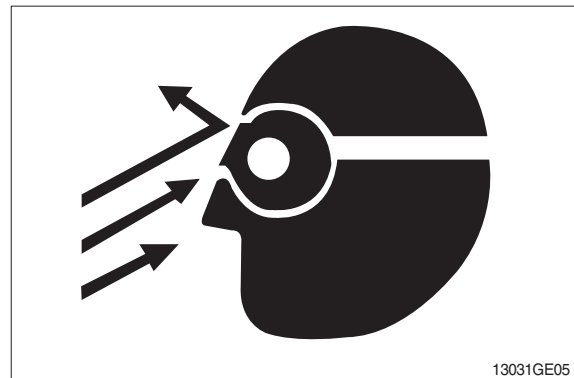

PROTECT AGAINST NOISE

Prolonged exposure to loud noise can cause impairment or loss of hearing.


Wear a suitable hearing protective device such as earmuffs or earplugs to protect against objectionable or uncomfortable loud noises.



AVOID POWER LINES

Serious injury or death can result from contact with electric lines.


Never move any part of the machine or load closer to electric line than 3m(10ft) plus twice the line insulator length.

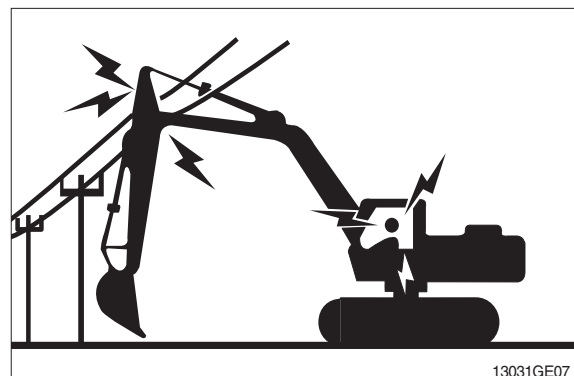

KEEP RIDERS OFF EXCAVATOR

Only allow the operator on the excavator. Keep riders off.

Riders on excavator are subject to injury such as being struck by foreign objects and being thrown off the excavator. Riders also obstruct the operator's view resulting in the excavator being operated in an unsafe manner.

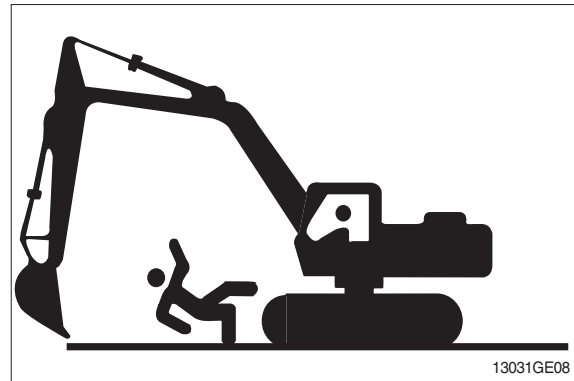


MOVE AND OPERATE MACHINE SAFELY

Bystanders can be run over. Know the location of bystanders before moving, swinging, or operating the machine.

Always keep the travel alarm in working condition. It warns people when the excavator starts to move.

Use a signal person when moving, swinging, or operating the machine in congested areas. Coordinate hand signals before starting the excavator.

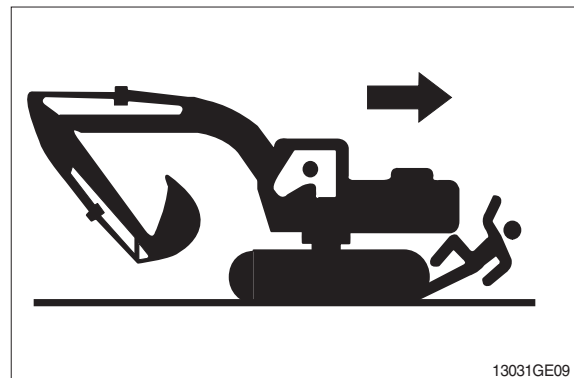

OPERATE ONLY FROM OPERATOR'S SEAT

Avoid possible injury machine damage. Do not start engine by shorting across starter terminals.

NEVER start engine while standing on ground. Start engine only from operator's seat.



PARK MACHINE SAFELY

Before working on the machine:


- Park machine on a level surface.
- Lower bucket to the ground.
- Turn auto idle switch off.
- Run engine at 1/2 speed without load for 2 minutes.
- Turn key switch to OFF to stop engine. Remove key from switch.
- Move pilot control shutoff lever to locked position.
- Allow engine to cool.

SUPPORT MACHINE PROPERLY

Always lower the attachment or implement to the ground before you work on the machine. If you must work on a lifted machine or attachment, securely support the machine or attachment.

Do not support the machine on cinder blocks, hollow tiles, or props that may crumble under continuous load.

Do not work under a machine that is supported solely by a jack. Follow recommended procedures in this manual.

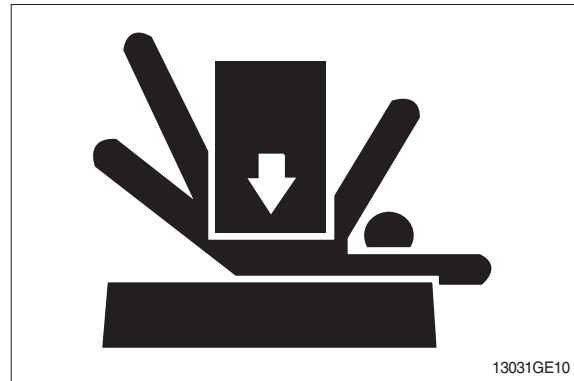

SERVICE COOLING SYSTEM SAFELY


Explosive release of fluids from pressurized cooling system can cause serious burns.

Shut off engine. Only remove filler cap when cool enough to touch with bare hands.



HANDLE FLUIDS SAFELY-AVOID FIRES


Handle fuel with care; It is highly flammable. Do not refuel the machine while smoking or when near open flame or sparks. Always stop engine before refueling machine. Fill fuel tank outdoors.

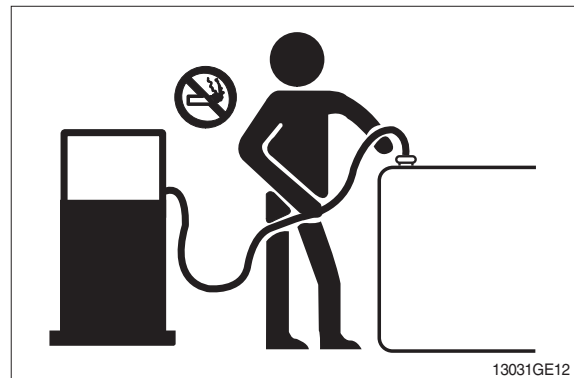

Store flammable fluids away from fire hazards. Do not incinerate or puncture pressurized containers.

Make sure machine is clean of trash, grease, and debris.

Do not store oily rags; They can ignite and burn spontaneously.

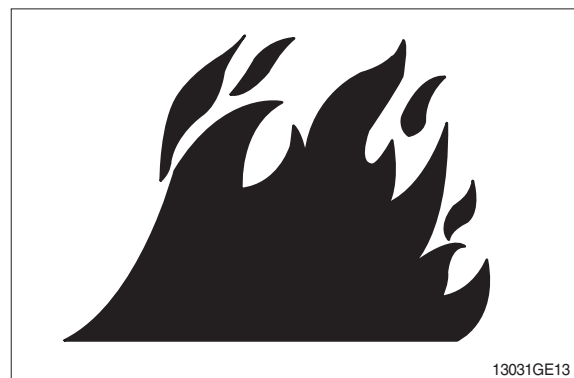

BEWARE OF EXHAUST FUMES

Prevent asphyxiation. Engine exhaust fumes can cause sickness or death.

If you must operate in a building, be positive there is adequate ventilation. Either use an exhaust pipe extension to remove the exhaust fumes or open doors and windows to bring enough outside air into the area.

REMOVE PAINT BEFORE WELDING OR HEATING

Avoid potentially toxic fumes and dust.

Hazardous fumes can be generated when paint is heated by welding, soldering, or using a torch.


Do all work outside or in a well ventilated area. Dispose of paint and solvent properly.

Remove paint before welding or heating:

- If you sand or grind paint, avoid breathing the dust.
Wear an approved respirator.
- If you use solvent or paint stripper, remove stripper with soap and water before welding. Remove solvent or paint stripper containers and other flammable material from area. Allow fumes to disperse at least 15 minutes before welding or heating.

ILLUMINATE WORK AREA SAFELY


Illuminate your work area adequately but safely. Use a portable safety light for working inside or under the machine. Make sure the bulb is enclosed by a wire cage. The hot filament of an accidentally broken bulb can ignite spilled fuel or oil.

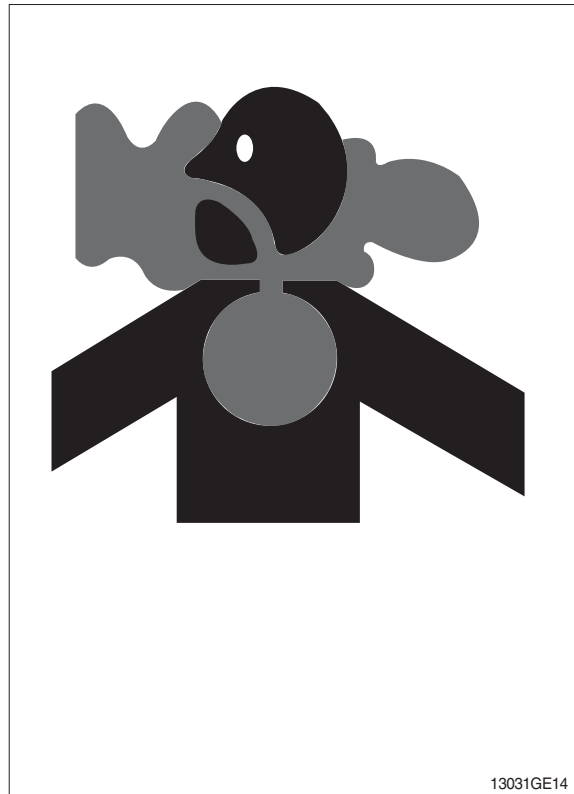

SERVICE MACHINE SAFELY

Tie long hair behind your head. Do not wear a necktie, scarf, loose clothing or necklace when you work near machine tools or moving parts. If these items were to get caught, severe injury could result.


Remove rings and other jewelry to prevent electrical shorts and entanglement in moving parts.

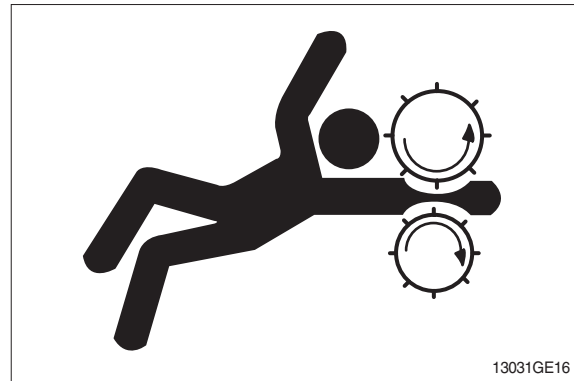

STAY CLEAR OF MOVING PARTS

Entanglements in moving parts can cause serious injury.

To prevent accidents, use care when working around rotating parts.

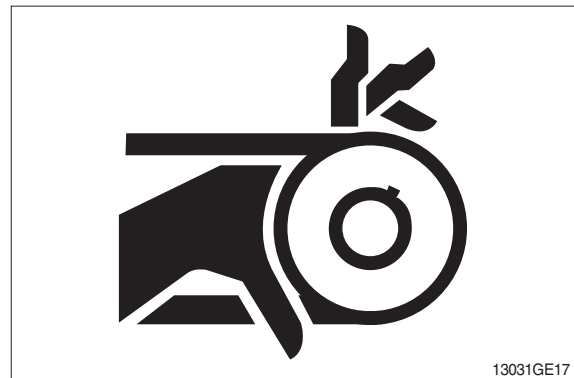


AVOID HIGH PRESSURE FLUIDS

Escaping fluid under pressure can penetrate the skin causing serious injury.

Avoid the hazard by relieving pressure before disconnecting hydraulic or other lines. Tighten all connections before applying pressure.

Search for leaks with a piece of cardboard. Protect hands and body from high pressure fluids.

If an accident occurs, see a doctor immediately. Any fluid injected into the skin must be surgically removed within a few hours or gangrene may result.

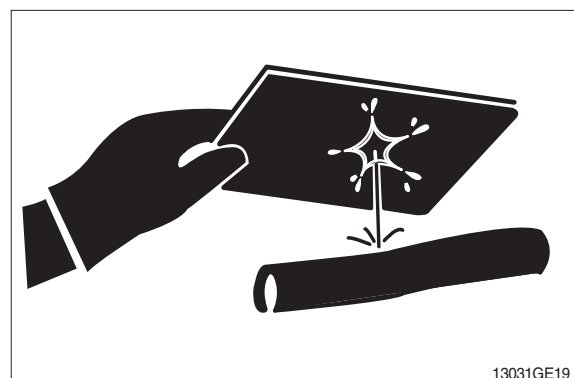

AVOID HEATING NEAR PRESSURIZED FLUID LINES

Flammable spray can be generated by heating near pressurized fluid lines, resulting in severe burns to yourself and bystanders. Do not heat by welding, soldering, or using a torch near pressurized fluid lines or other flammable materials.

Pressurized lines can be accidentally cut when heat goes beyond the immediate flame area. Install fire resisting guards to protect hoses or other materials.



PREVENT BATTERY EXPLOSIONS

Keep sparks, lighted matches, and flame away from the top of battery. Battery gas can explode.

Never check battery charge by placing a metal object across the posts. Use a volt-meter or hydrometer.

Do not charge a frozen battery; It may explode. Warm battery to 16°C (60°F).



PREVENT ACID BURNS

Sulfuric acid in battery electrolyte is poisonous. It is strong enough to burn skin, eat holes in clothing, and cause blindness if splashed into eyes.

Avoid the hazard by:

1. Filling batteries in a well-ventilated area.
2. Wearing eye protection and rubber gloves.
3. Avoiding breathing fumes when electrolyte is added.
4. Avoiding spilling or dripping electrolyte.
5. Use proper jump start procedure.

If you spill acid on yourself:

1. Flush your skin with water.
2. Apply baking soda or lime to help neutralize the acid.
3. Flush your eyes with water for 10-15 minutes. Get medical attention immediately.

If acid is swallowed:

1. Drink large amounts of water or milk.
2. Then drink milk of magnesia, beaten eggs, or vegetable oil.
3. Get medical attention immediately.



USE TOOLS PROPERLY

Use tools appropriate to the work. Makeshift tools, parts, and procedures can create safety hazards.

Use power tools only to loosen threaded tools and fasteners.

For loosening and tightening hardware, use the correct size tools. **DO NOT** use U.S. measurement tools on metric fasteners. Avoid bodily injury caused by slipping wrenches.

Use only recommended replacement parts. (See Parts catalogue.)

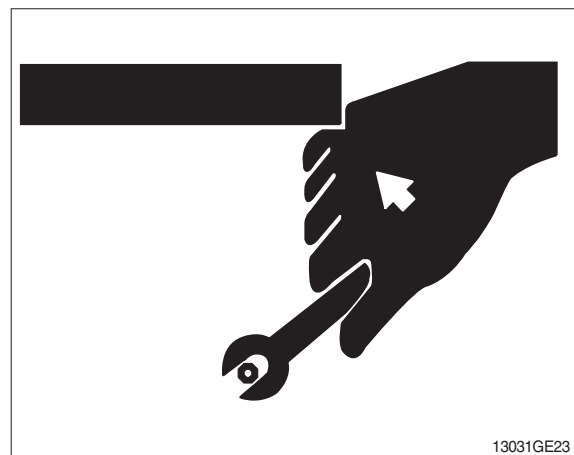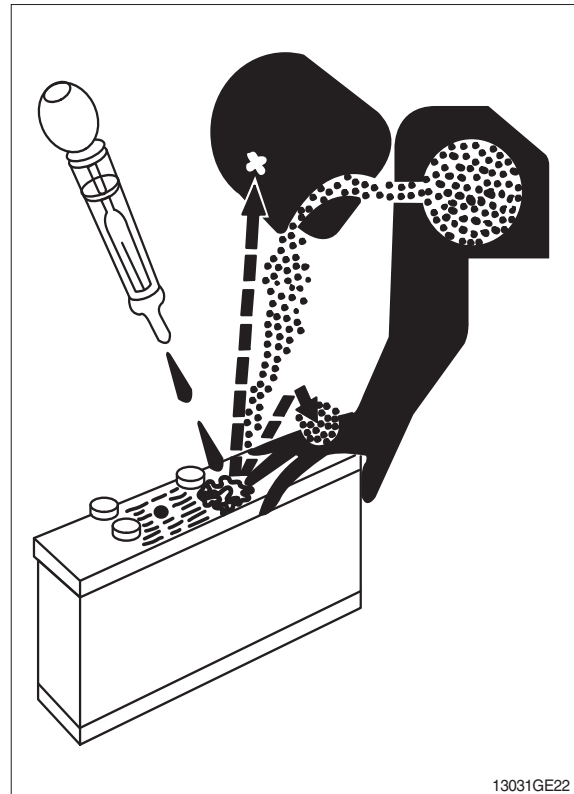


DISPOSE OF FLUIDS PROPERLY

Improperly disposing of fluids can harm the environment and ecology. Before draining any fluids, find out the proper way to dispose of waste from your local environmental agency.

Use proper containers when draining fluids. Do not use food or beverage containers that may mislead someone into drinking from them.

DO NOT pour oil into the ground, down a drain, or into a stream, pond, or lake. Observe relevant environmental protection regulations when disposing of oil, fuel, coolant, brake fluid, filters, batteries, and other harmful waste.

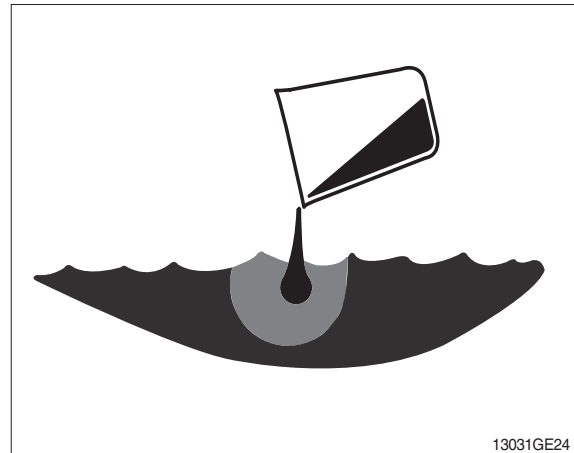

REPLACE SAFETY SIGNS

Replace missing or damaged safety signs. See the machine operator's manual for correct safety sign placement.





LIVE WITH SAFETY

Before returning machine to customer, make sure machine is functioning properly, especially the safety systems. Install all guards and shields.

GROUP 2 SPECIFICATIONS

1. MAJOR COMPONENT

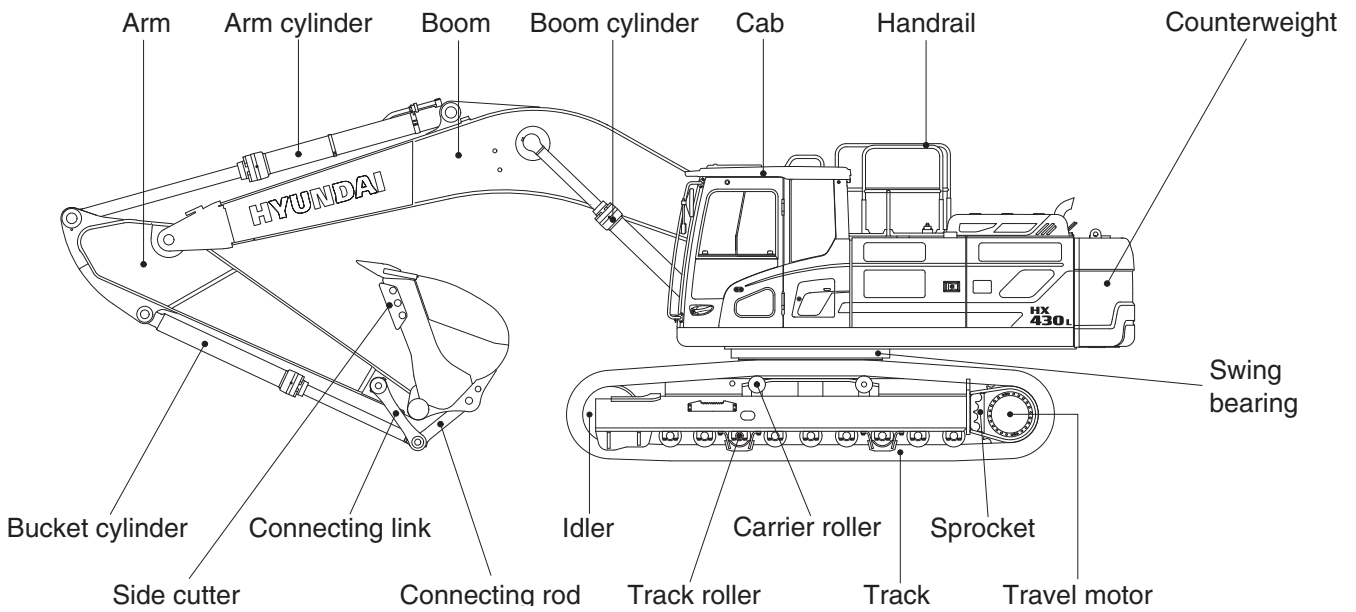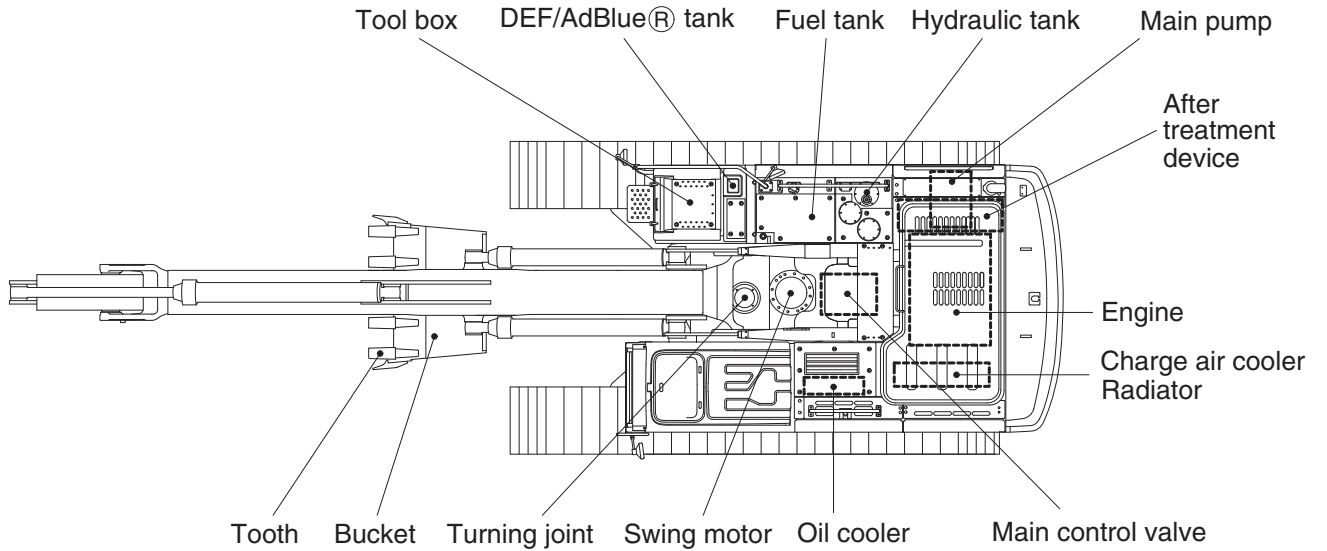


430F2SP01

2. SPECIFICATIONS

1) HX430 L

· 6.5 m (21' 4") BOOM and 3.2 m (10' 6") ARM

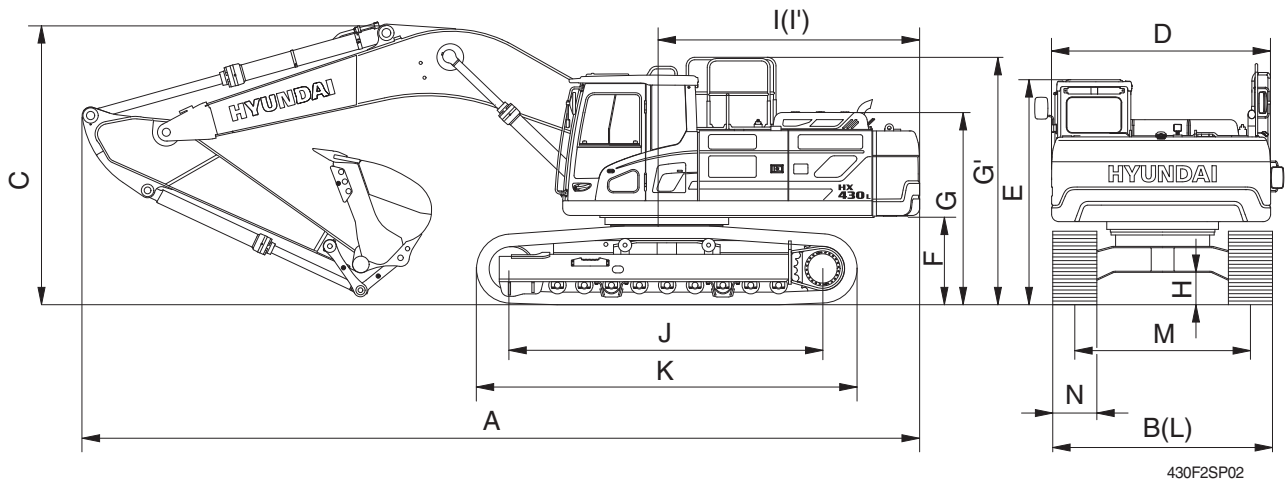


430F2SP02

| Description | | Unit | Specification |
|--|----|-----------------------------------|-------------------|
| Operating weight | | kg (lb) | 44120 (97270) |
| Bucket capacity (SAE heaped), standard | | m ³ (yd ³) | 1.90 (2.49) |
| Overall length | A | mm (ft-in) | 11400 (37' 5") |
| Overall width, with 600 mm shoe | B | | 3340 (10'11") |
| Overall height | C | | 3630 (11' 11") |
| Superstructure width | D | | 2980 (9' 9") |
| Overall height of cab | E | | 3240 (10' 8") |
| Ground clearance of counterweight | F | | 1295 (4' 3") |
| Overall height of engine hood | G | | 2755 (9' 0") |
| Overall height of handrail | G' | | 3445 (11' 4") |
| Minimum ground clearance | H | | 555 (1' 10") |
| Rear-end distance | I | | 3555 (11' 8") |
| Rear-end swing radius | I' | | 3640 (11' 11") |
| Distance between tumblers | J | | 4470 (14' 8") |
| Undercarriage length | K | | 5462 (17' 11") |
| Undercarriage width | L | | 3340 (10' 11") |
| Track gauge | M | | 2740 (9' 0") |
| Track shoe width, standard | N | | 600 (24") |
| Travel speed (low/high) | | km/hr (mph) | 3.2/5.5 (2.0/3.4) |
| Swing speed | | rpm | 9.2 |
| Gradeability | | Degree (%) | 35 (70) |
| Ground pressure (600 mm shoe) | | kgf/cm ² (psi) | 0.76 (0.81) |
| Max traction force | | kg (lb) | 33600 (74075) |

3. WORKING RANGE

1) HX430 L [6.5 m (21' 4") BOOM]

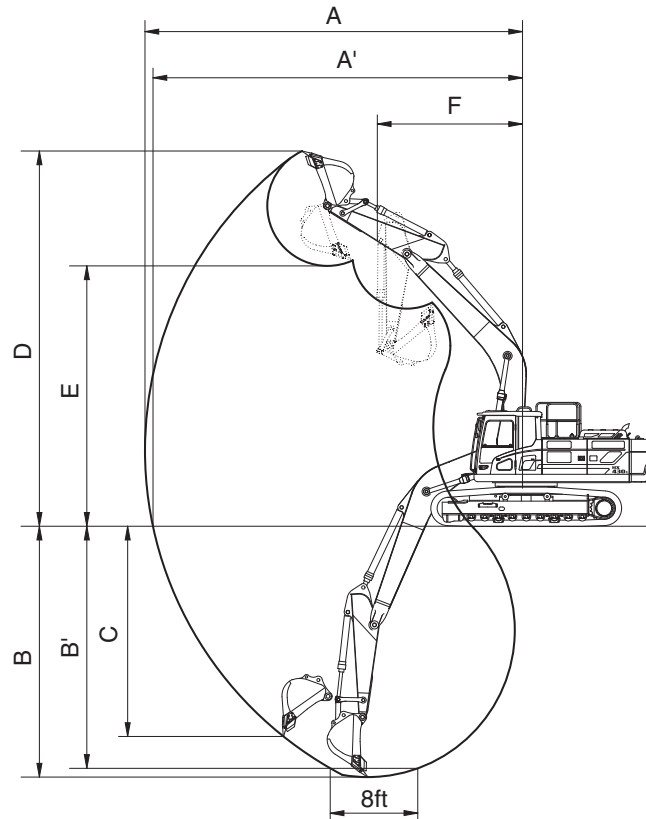

430F2SP03

| Description | | 2.6 m (8' 6") Arm | 3.2 m (10' 6") Arm |
|---------------------------------|-----|-------------------|--------------------|
| Max digging reach | A | 10750 mm (35' 3") | 11160 mm (36' 7") |
| Max digging reach on ground | A' | 10520 mm (34' 6") | 10930 mm (35' 10") |
| Max digging depth | B | 6910 mm (22' 8") | 7500 mm (24' 7") |
| Max digging depth (8ft level) | B' | 6730 mm (22' 1") | 7350 mm (24' 1") |
| Max vertical wall digging depth | C | 5100 mm (16' 9") | 5440 mm (17' 10") |
| Max digging height | D | 10390 mm (34' 1") | 10290 mm (33' 9") |
| Max dumping height | E | 7250 mm (23' 9") | 7200 mm (23' 7") |
| Min swing radius | F | 4540 mm (14' 11") | 4490 mm (14' 9") |
| Bucket digging force | SAE | 201.0 [219.3] kN | 201.0 [219.3] kN |
| | | 20500 [22360] kgf | 20500 [22360] kgf |
| | | 45190 [49300] lbf | 45190 [49300] lbf |
| | ISO | 228.5 [249.3] kN | 228.5 [249.3] kN |
| | | 23300 [25420] kgf | 23300 [25420] kgf |
| | | 51370 [56040] lbf | 51370 [56040] lbf |
| Arm crowd force | SAE | 180.7 [197.2] kN | 160.8 [175.4] kN |
| | | 18430 [20110] kgf | 16400 [17890] kgf |
| | | 40630 [44330] lbf | 36160 [39440] lbf |
| | ISO | 188.0 [205.1] kN | 165.7 [180.8] kN |
| | | 19170 [20910] kgf | 16900 [18440] kgf |
| | | 42260 [46100] lbf | 37260 [40650] lbf |

[] : Power boost











4. WEIGHT

| Item | HX430 L | |
|---|---------|-------|
| | kg | lb |
| Upperstructure assembly | 15610 | 34410 |
| Main frame weld assembly | 3045 | 6710 |
| Engine assembly | 710 | 1565 |
| Main pump assembly | 190 | 420 |
| Main control valve assembly | 340 | 750 |
| Swing motor assembly | 440 | 970 |
| Hydraulic oil tank assembly | 340 | 750 |
| Fuel tank assembly | 260 | 570 |
| Counterweight | 7500 | 16535 |
| Cab assembly | 490 | 1080 |
| Lower chassis assembly | 19600 | 43210 |
| Track frame weld assembly | 6430 | 14180 |
| Swing bearing | 550 | 1210 |
| Travel motor assembly | 630 | 1390 |
| Turning joint | 65 | 140 |
| Track recoil spring and idler | 325 | 720 |
| Idler | 310 | 680 |
| Sprocket | 95 | 210 |
| Carrier roller | 40 | 90 |
| Track roller | 90 | 192 |
| Track-chain assembly (600 mm standard triple grouser shoe) | 2700 | 5950 |
| Front attachment assembly (6.5 m boom, 3.2 m arm, 1.90 m ³ SAE heaped bucket) | 8910 | 19640 |
| 6.5 m boom assembly | 3180 | 7010 |
| 3.2 m arm assembly | 1480 | 3260 |
| 1.90 m ³ SAE heaped bucket | 1980 | 4370 |
| Boom cylinder assembly | 370 | 820 |
| Arm cylinder assembly | 480 | 1060 |
| Bucket cylinder assembly | 310 | 680 |
| Bucket control linkage assembly | 370 | 820 |

5. LIFTING CAPACITIES

1) HX430 L

(1) 6.5 m (21' 4") boom, 2.6 m (8' 6") arm equipped with 2.10 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoe and 6200 kg (13670 lb) counterweight.

| Load point height | | Load radius | | | | | | | | At max. reach | | |
|-------------------|----|---|---|---|---|---|---|---|---|---|---|--------|
| | | 3.0 m (10.0 ft) | | 4.5 m (15.0 ft) | | 6.0 m (20.0 ft) | | 7.5 m (25.0 ft) | | Capacity | | Reach |
| | |  |  |  |  |  |  |  |  |  |  | m (ft) |
| 9.0 m | kg | | | | | | | | | *6110 | *6110 | 6.70 |
| (30 ft) | lb | | | | | | | | | *13470 | *13470 | (22.0) |
| 7.5 m | kg | | | | | | | | | *6020 | *6020 | 8.02 |
| (25.0 ft) | lb | | | | | | | | | *13270 | *13270 | (26.3) |
| 6.0 m | kg | | | | | *7120 | *7120 | *6600 | *6600 | *6110 | 5360 | 8.86 |
| (20.0 ft) | lb | | | | | *15700 | *15700 | *14550 | *14550 | *13470 | 11820 | (29.1) |
| 4.5 m | kg | | | *11000 | *11000 | *8440 | *8440 | *7210 | *7210 | *6270 | 4660 | 9.37 |
| (15.0 ft) | lb | | | *24250 | *24250 | *18610 | *18610 | *15900 | *15900 | *13820 | 10270 | (30.7) |
| 3.0 m | kg | | | *14280 | *14280 | *10020 | *10020 | *8020 | 7050 | *6500 | 4310 | 9.59 |
| (10.0 ft) | lb | | | *31480 | *31480 | *22090 | *22090 | *17680 | 15540 | *14330 | 9500 | (31.5) |
| 1.5 m | kg | | | *16530 | 15120 | *11380 | 9660 | *8800 | 6730 | *6770 | 4240 | 9.56 |
| (5.0 ft) | lb | | | *36440 | 33330 | *25090 | 21300 | *19400 | 14840 | *14930 | 9350 | (31.4) |
| Ground | kg | | | *17270 | 14740 | *12190 | 9310 | *9320 | 6510 | *7070 | 4450 | 9.27 |
| Line | lb | | | *38070 | 32500 | *26870 | 20530 | *20550 | 14350 | *15590 | 9810 | (30.4) |
| -1.5 m | kg | *18230 | *18230 | *16960 | 14720 | *12320 | 9190 | *9370 | 6430 | *7360 | 5020 | 8.68 |
| (-5.0 ft) | lb | *40190 | *40190 | *37390 | 32450 | *27160 | 20260 | *20660 | 14180 | *16230 | 11070 | (28.5) |
| -3.0 m | kg | *21990 | *21990 | *15720 | 14940 | *11590 | 9290 | | | *7530 | 6250 | 7.73 |
| (-10.0 ft) | lb | *48480 | *48480 | *34660 | 32940 | *25550 | 20480 | | | *16600 | 13780 | (25.4) |
| -4.5 m | kg | *17990 | *17990 | *13070 | *13070 | | | | | *7190 | *7190 | 6.24 |
| (-15.0 ft) | lb | *39660 | *39660 | *28810 | *28810 | | | | | *15850 | *15850 | (20.5) |

- Note
1. Lifting capacity are based on SAE J1097 and ISO 10567.
 2. Lifting capacity of the ROBEX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
 3. The load point is a hook located on the back of the bucket.
 4. *indicates load limited by hydraulic capacity.

※ Lifting capacities are based upon a standard machine conditions.
















Lifting capacities will vary with different work tools, ground conditions and attachments.

The difference between the weight of a work tool attachment must be subtracted.

Consult your Hyundai dealer regarding the lifting capacities for specific work tools and attachments.


▲ Failure to comply to the rated load can cause possible personal injury or property damage. Make adjustments to the rated load as necessary for non-standard configurations.

(2) 6.5 m (21' 4") boom, 3.2 m (10' 6") arm equipped with 1.90 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoe and 6200 kg (13670 lb) counterweight.

| Load point height | | Load radius | | | | | | | | | | | | At max. reach | | | |
|----------------------|----|---|---|---|---|---|---|---|---|---|--|---|---|---|---|---|----------------|
| | | 1.5 m (5.0 ft) | | 3.0 m (10.0 ft) | | 4.5 m (15.0 ft) | | 6.0 m (20.0 ft) | | 7.5 m (25.0 ft) | | 9.0 m (30.0 ft) | | Capacity | | Reach | |
| | |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  | m (ft) |
| 9.0 m (30 ft) | kg | | | | | | | | | | | | | | *5440 | *5440 | 7.31 (24.0) |
| | lb | | | | | | | | | | | | | | *11990 | *11990 | |
| 7.5 m (25.0 ft) | kg | | | | | | | | *5330 | *5330 | | | | | *5490 | *5490 | 8.53 (28.0) |
| | lb | | | | | | | | *11750 | *11750 | | | | | *12100 | *12100 | |
| 6.0 m (20.0 ft) | kg | | | | | | | | *6000 | *6000 | | | | | *5630 | 5080 | 9.32 (30.6) |
| | lb | | | | | | | | *13230 | *13230 | | | | | *12410 | 11200 | |
| 4.5 m (15.0 ft) | kg | | | | | | | *7670 | *7670 | *6690 | *6690 | *5290 | *5290 | *5850 | 4450 | 9.80 (32.2) | |
| | lb | | | | | | | *16910 | *16910 | *14750 | *14750 | *11660 | *11660 | *12900 | 9810 | | |
| 3.0 m (10.0 ft) | kg | | | | *12950 | *12950 | *9350 | *9350 | *7600 | 7290 | *6650 | 5220 | *6110 | 4130 | 10.01 (32.8) | | |
| | lb | | | | *28550 | *28550 | *20610 | *20610 | *16760 | 16070 | *14660 | 11510 | *13470 | 9110 | | | |
| 1.5 m (5.0 ft) | kg | | | | *15710 | 15610 | *10910 | 9940 | *8500 | 6920 | *7140 | 5020 | *6420 | 4040 | 9.98 (32.7) | | |
| | lb | | | | *34630 | 34410 | *24050 | 21910 | *18740 | 15260 | *15740 | 11070 | *14150 | 8910 | | | |
| Ground Line | kg | | | *12890 | *12890 | *17110 | 14960 | *11990 | 9480 | *9200 | 6640 | *7490 | 4880 | *6770 | 4190 | 9.70 (31.8) | |
| | lb | | | *28420 | *28420 | *37720 | 32980 | *26430 | 20900 | *20280 | 14640 | *16510 | 10760 | *14930 | 9240 | | |
| -1.5 m (-5.0 ft) | kg | *13760 | *13760 | *17830 | *17830 | *17340 | 14770 | *12430 | 9270 | *9490 | 6490 | | | *7150 | 4640 | 9.15 (30.0) | |
| | lb | *30340 | *30340 | *39310 | *39310 | *38230 | 32560 | *27400 | 20440 | *20920 | 14310 | | | *15760 | 10230 | | |
| -3.0 m (-10.0 ft) | kg | *18570 | *18570 | *23870 | *23870 | *16570 | 14860 | *12110 | 9270 | *9150 | 6510 | | | *7520 | 5610 | 8.26 (27.1) | |
| | lb | *40940 | *40940 | *52620 | *52620 | *36530 | 32760 | *26700 | 20440 | *20170 | 14350 | | | *16580 | 12370 | | |
| -4.5 m (-15.0 ft) | kg | *24270 | *24270 | *20790 | *20790 | *14620 | *14620 | *10670 | 9500 | | | | | *7700 | *7700 | 6.89 (22.6) | |
| | lb | *53510 | *53510 | *45830 | *45830 | *32230 | *32230 | *23520 | 20940 | | | | | *16980 | *16980 | | |

6. BUCKET SELECTION GUIDE

1) HEAVY DUTY BUCKET

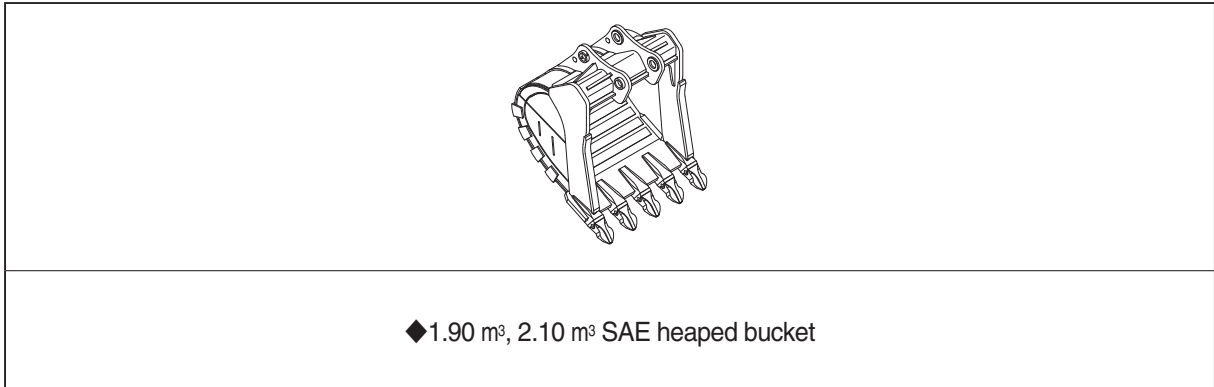

| Capacity | | Width | Weight | Recommendation | |
|--|--|------------------|----------------------|----------------------|-----------------------|
| | | | | 6.5 m (21' 4") boom | |
| SAE heaped | CECE heaped | | | 2.6 m arm (8' 6") | 3.2 m arm (10' 6") |
| ◆ 1.90 m ³ (2.49 yd ³) | 1.65 m ³ (2.16 yd ³) | 1665 mm (66") | 1980 kg (4370 lb) | ○ | ◉ |
| ◆ 2.10 m ³ (2.75 yd ³) | 1.84 m ³ (2.41 yd ³) | 1800 mm (71") | 2080 kg (4590 lb) | ◉ | ● |

◆ : Rock-heavy duty bucket

- Applicable for materials with density of 2000 kg/m³ (3370 lb/yd³) or less
- ◉ Applicable for materials with density of 1600 kg/m³ (2700 lb/yd³) or less
- Applicable for materials with density of 1100 kg/m³ (1850 lb/yd³) or less

※ These recommendations are for general conditions and average use.

Work tools and ground conditions have effects on machine performance.

Select an optimum combination according to the working conditions and the type of work that is being done.


Consult your Hyundai dealer for information on selecting the correct boom–arm–bucket combination.

7. UNDERCARRIAGE

1) TRACKS

X-leg type center frame is integrally welded with reinforced box-section track frames. The design includes dry tracks, lubricated rollers, idlers, sprockets, hydraulic track adjusters with shock absorbing springs and assembled track-type tractor shoes with triple grousers.

2) TYPES OF SHOES

| Model | Shapes | | Triple grouser | | | | |
|---------|------------------|---------------------------|--|---------------|---------------|---------------|----------------|
| | | |  | | | | |
| HX430 L | Shoe width | mm (in) | 600 (24) | 700 (28) | 750 (30) | 800 (32) | 900 (36) |
| | Operating weight | kg (lb) | 44120 (97270) | 44640 (98410) | 44900 (98990) | 45170 (99580) | 45680 (100710) |
| | Ground pressure | kgf/cm ² (psi) | 0.76 (10.81) | 0.66 (9.39) | 0.62 (8.82) | 0.59 (8.39) | 0.53 (7.54) |
| | Overall width | mm (ft-in) | 3340 (10' 11") | 3440 (11' 3") | 3490 (11' 5") | 3540 (11' 7") | 3640 (11' 11") |

3) NUMBER OF ROLLERS AND SHOES ON EACH SIDE

| Item | Quantity |
|-----------------|----------|
| Carrier rollers | 2 EA |
| Track rollers | 9 EA |
| Track shoes | 53 EA |

4) SELECTION OF TRACK SHOE

Suitable track shoes should be selected according to operating conditions.

Method of selecting shoes

Confirm the category from the list of applications in **table 2**, then use **table 1** to select the shoe. Wide shoes (categories B and C) have limitations on applications. Before using wide shoes, check the precautions, then investigate and study the operating conditions to confirm if these shoes are suitable.

Select the narrowest shoe possible to meet the required flotation and ground pressure. Application of wider shoes than recommendations will cause unexpected problem such as bending of shoes, crack of link, breakage of pin, loosening of shoe bolts and the other various problems.

※ **Table 1**

| Track shoe | Specification | Category |
|-----------------------|---------------|----------|
| 600 mm triple grouser | Standard | A |
| 700 mm triple grouser | Option | B |
| 750 mm triple grouser | Option | B |
| 800 mm triple grouser | Option | C |
| 900 mm triple grouser | Option | C |

※ **Table 2**

| Category | Applications | Applications |
|----------|---------------------------------------|--|
| A | Rocky ground, river beds, normal soil | <ul style="list-style-type: none"> · Travel at low speed on rough ground with large obstacles such as boulders or fallen trees |
| B | Normal soil, soft ground | <ul style="list-style-type: none"> · These shoes cannot be used on rough ground with large obstacles such as boulders or fallen trees · Travel at high speed only on flat ground · Travel slowly at low speed if it is impossible to avoid going over obstacles |
| C | Extremely soft ground (swampy ground) | <ul style="list-style-type: none"> · Use the shoes only in the conditions that the machine sinks and it is impossible to use the shoes of category A or B · These shoes cannot be used on rough ground with large obstacles such as boulders or fallen trees · Travel at high speed only on flat ground · Travel slowly at low speed if it is impossible to avoid going over obstacles |

8. SPECIFICATIONS FOR MAJOR COMPONENTS

1) ENGINE

| Item | Specification |
|-------------------------------------|---|
| Model | Cummins QSL9 |
| Type | 4-cycle turbocharged charger air cooled diesel engine |
| Cooling method | Water cooling |
| Number of cylinders and arrangement | 6 cylinders, in-line |
| Firing order | 1-5-3-6-2-4 |
| Combustion chamber type | Direct injection type |
| Cylinder bore × stroke | 114 × 145 mm (4.49" × 5.69") |
| Piston displacement | 8900 cc (543 cu in) |
| Compression ratio | 17.8 : 1 |
| Rated net horse power (SAE J1349) | 358Hp at 1800 rpm (267 kW at 1800 rpm) |
| Rated gross horse power (SAE J1995) | 372 Hp at 1800 rpm (277 kW at 1800 rpm) |
| Maximum torque | 166 kgf · m (1200 lbf · ft) at 1500 rpm |
| Engine oil quantity | 30 ℓ (7.9 U.S. gal) |
| Wet weight | 708 kg (1560 lb) |
| Low idling speed | 900 ± 100 rpm |
| High idling speed | 1700 + 50 rpm |
| Rated fuel consumption | 155 g/Hp · hr at 1650 rpm |
| Starting motor | Denso (24V-7.8 kW) |
| Alternator | Denso 24V-95A |
| Battery | 2 × 12V × 160Ah |

2) MAIN PUMP

| Item | Specification |
|------------------|---|
| Type | Variable displacement tandem axis piston pumps |
| Capacity | 2 × 185 cc/rev |
| Maximum pressure | 330 kgf/cm ² (4690 psi) [360 kgf/cm ² (5120 psi)] |
| Rated oil flow | 2 × 333 ℓ /min (88.0 U.S. gpm / 73.2 U.K. gpm) |
| Rated speed | 1800 rpm |

[]: Power boost

3) GEAR PUMP

| Item | Specification |
|------------------|---|
| Type | Fixed displacement gear pump single stage |
| Capacity | 15cc/rev |
| Maximum pressure | 40 kgf/cm ² (570 psi) |
| Rated oil flow | 27.00 ℓ /min (7.1 U.S. gpm/5.9 U.K. gpm) |

4) MAIN CONTROL VALVE

| Item | Specification |
|--------------------------------|---|
| Type | 9 spools |
| Operating method | Hydraulic pilot system |
| Main relief valve pressure | 330 kgf/cm ² (4690 psi) [360 kgf/cm ² (5120 psi)] |
| Overload relief valve pressure | 390 kgf/cm ² (5550 psi) |

[]: Power boost

5) SWING MOTOR

| Item | Specification |
|------------------------|--|
| Type | Axial piston motor |
| Capacity | 250 cc/rev |
| Relief pressure | 290 kgf/cm ² (4120 psi) |
| Braking system | Automatic, spring applied hydraulic released |
| Braking torque | 107 kgf · m (773 lbf · ft) |
| Brake release pressure | 30~50 kgf/cm ² (427~711 psi) |
| Reduction gear type | 2 - stage planetary |

6) TRAVEL MOTOR

| Item | Specification |
|------------------------|--|
| Type | Variable displacement axial piston motor |
| Relief pressure | 360 kgf/cm ² (5120 psi) |
| Capacity (max / min) | 283/161 cc/rev |
| Reduction gear type | 2-stage planetary |
| Braking system | Automatic, spring applied hydraulic released |
| Brake release pressure | 15.7 kgf/cm ² (224 psi) |
| Braking torque | 120 kgf · m (860 lbf · ft) |

7) CYLINDER

| Item | | Specification |
|-----------------|-----------------------------|-------------------------|
| Boom cylinder | Bore dia × Rod dia × Stroke | ∅ 160 × ∅ 110 × 1500 mm |
| | Cushion | Extend only |
| Arm cylinder | Bore dia × Rod dia × Stroke | ∅ 170 × ∅ 120 × 1760 mm |
| | Cushion | Extend and retract |
| Bucket cylinder | Bore dia × Rod dia × Stroke | ∅ 150 × ∅ 105 × 1295 mm |
| | Cushion | Extend only |

※ Discoloration of cylinder rod can occur when the friction reduction additive of lubrication oil spreads on the rod surface.

※ Discoloration does not cause any harmful effect on the cylinder performance.

8) SHOE

| Item | | Width | Ground pressure | Link quantity | Overall width |
|---------|----------|--------------|--------------------------------------|---------------|-------------------|
| HX430 L | Standard | 600 mm (24") | 0.76 kgf/cm ² (10.81 psi) | 53 | 3340 mm (10' 11") |
| | Option | 700 mm (28") | 0.66 kgf/cm ² (9.39 psi) | 53 | 3440 mm (11' 3") |
| | | 750 mm (30") | 0.62 kgf/cm ² (8.82 psi) | 53 | 3490 mm (11' 5") |
| | | 800 mm (32") | 0.59 kgf/cm ² (8.39 psi) | 53 | 3540 mm (11' 7") |
| | | 900 mm (36") | 0.53 kgf/cm ² (7.54 psi) | 53 | 3640 mm (11' 11") |

9) BUCKET

| Item | Capacity | | Tooth quantity | Width |
|---------|---|---|----------------|---------------|
| | SAE heaped | CECE heaped | | |
| HX430 L | ◆ 1.90 m ³ (2.49 yd ³) | 1.65 m ³ (2.16 yd ³) | 5 | 1665 mm (66") |
| | ◆ 2.10 m ³ (2.75 yd ³) | 1.84 m ³ (2.41 yd ³) | 5 | 1800 mm (71") |

◆ : Rock-heavy duty bucket

9. RECOMMENDED OILS

HYUNDAI genuine lubricating oils have been developed to offer the best performance and service life for your equipment. These oils have been tested according to the specifications of HYUNDAI and, therefore, will meet the highest safety and quality requirements.

We recommend that you use only HYUNDAI genuine lubricating oils and grease officially approved by HYUNDAI.

| Service point | Kind of fluid | Capacity ℓ (U.S. gal) | Ambient temperature °C (°F) | | | | | | |
|---------------------------------|---|--------------------------|---|--------------|-------------|-------------|-----------|------------|------------|
| | | | -50 (-58) | -30 (-22) | -20 (-4) | -10 (14) | 0 (32) | 10 (50) | 20 (68) |
| Engine oil pan | Engine oil | 30 (7.9) | ★SAE 5W-40 | | | | | | |
| | | | SAE 30 | | | | | | |
| | | | SAE 10W | | | | | | |
| | | | SAE 10W-30 | | | | | | |
| | | | SAE 15W-40 | | | | | | |
| DEF/ AdBlue® tank | Mixture of urea and deionized water | 42.5 (11.2) | ISO 22241, High-purity urea + deionized water (32.5:67.5) | | | | | | |
| Swing drive | Gear oil | 8.0 (2.1) | ★SAE 75W-90 | | | | | | |
| Final drive | | 12.0 × 2 (3.2 × 2) | SAE 80W-90 | | | | | | |
| Hydraulic tank | Hydraulic oil | Tank : 210 (55.5) | ★ISO VG 15 | | | | | | |
| | | System : 414 (109) | ISO VG 32 | | | | | | |
| | | | ISO VG 46, HBHO VG 46★ ³ | | | | | | |
| | | | ISO VG 68 | | | | | | |
| Fuel tank | Diesel fuel★ ¹ | 550 (145.3) | ★ASTM D975 NO.1 | | | | | | |
| | | | ASTM D975 NO.2 | | | | | | |
| Fitting (grease nipple) | Grease | As required | ★NLGI NO.1 | | | | | | |
| Radiator (reservoir tank) | Mixture of antifreeze and soft water★ ² | 55 (14.5) | Ethylene glycol base permanent type (50 : 50) | | | | | | |
| | | | ★Ethylene glycol base permanent type (60 : 40) | | | | | | |

SAE : Society of Automotive Engineers

API : American Petroleum Institute

ISO : International Organization for Standardization

NLGI : National Lubricating Grease Institute

ASTM : American Society of Testing and Material

UTTO : Universal Tractor Transmission Oil

DEF : Diesel Exhaust Fluid, DEF compatible with AdBlue®

★ : Cold region

Russia, CIS, Mongolia

★¹ : Ultra low sulfur diesel
- sulfur content ≤ 15 ppm

★² : Soft water
City water or distilled water

★³ : Hyundai Bio Hydraulic Oil

- For more information, contact HYUNDAI dealers.

※ Using any lubricating oils other than HYUNDAI genuine products may lead to a deterioration of performance and cause damage to major components.

※ Do not mix HYUNDAI genuine oil with any other lubricating oil as it may result in damage to the systems of major components.

※ Do not use any engine oil other than that specified above, as it may clog the diesel particulate filter(DPF).

※ For HYUNDAI genuine lubricating oils and grease for use in regions with extremely low temperatures, please contact HYUNDAI dealers.