


GROUP 2 MAIN CIRCUIT

The main hydraulic circuit consists of suction circuit, delivery circuit, return circuit and drain circuit. The hydraulic system consists of one main pump, one control valve, two swing motor, four cylinders and two travel motors.

The swash plate type variable displacement axial piston pump is used as the main pump and is driven by the engine at ratio 1.0 of engine speed.

1. SUCTION AND DELIVERY CIRCUIT

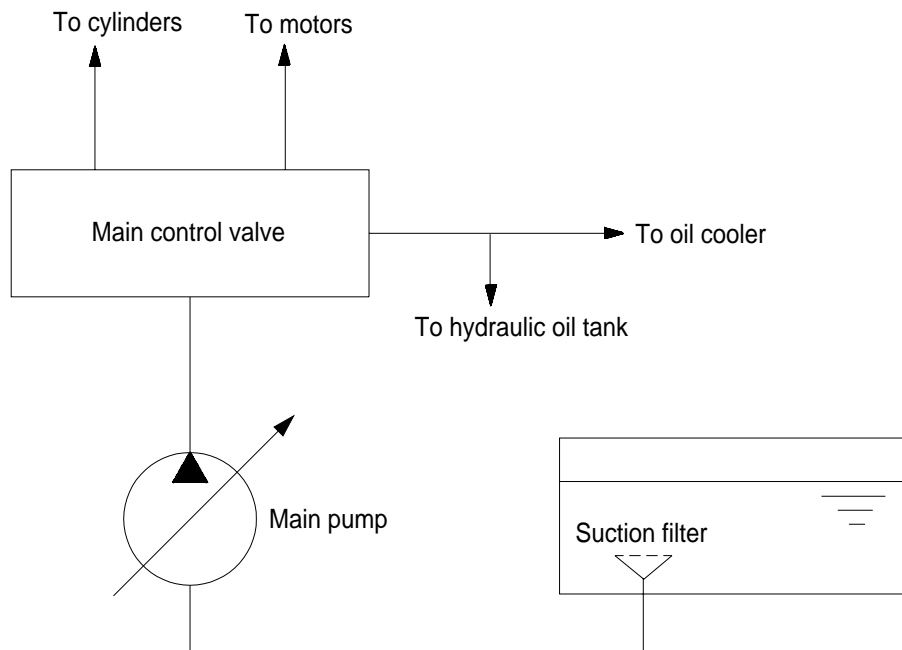


The pump receive oil from the hydraulic tank through a suction filter. The discharged oil from the pump flows into the control valve and goes out the tank ports.

The oil discharged from the main pump flows to the actuators through the control valve.

The control valve controls the hydraulic functions.

The oil returned from the actuators flows to the hydraulic tank through the control valve and the oil cooler.

2. RETURN CIRCUIT

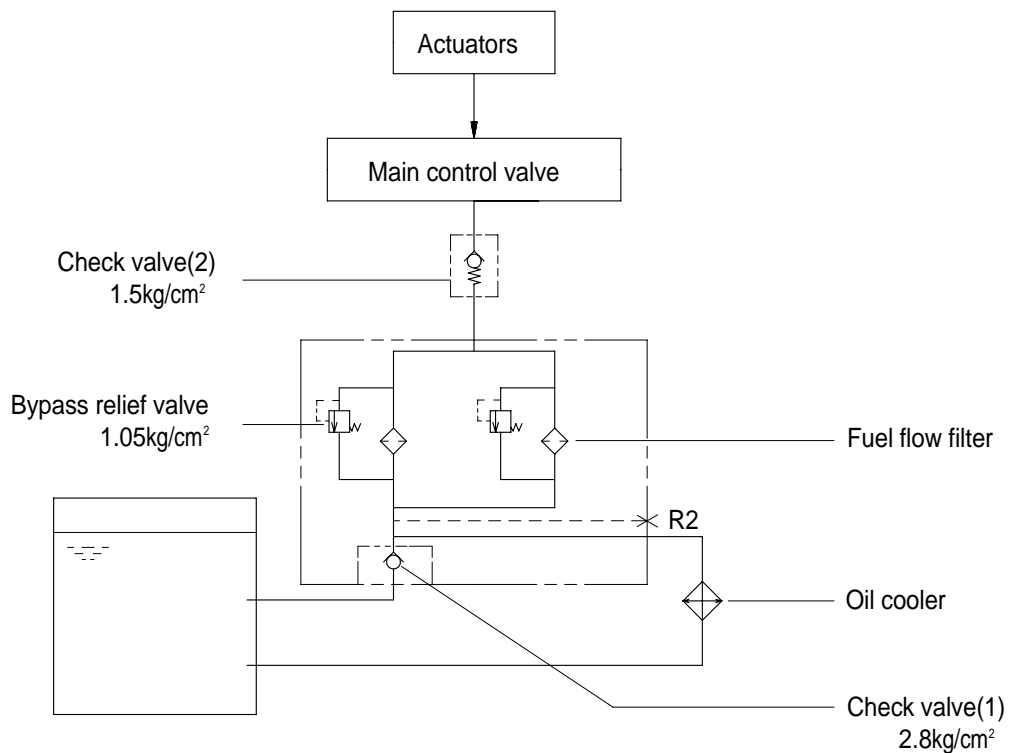

All the oil returned from each actuator returns to the hydraulic tank through the control valve.

The bypass check valves are provided in the return circuit.

The setting pressure of bypass check valves are 1.5kg/cm²(21.3psi) and 2.8kg/cm²(39.8psi). Usually, oil returns to the hydraulic tank from the left side of control valve through oil cooler.

When oil temperature is low, viscosity becomes higher and flow resistance increases when passing through the oil cooler. When the oil pressure exceeds 2.8kg/cm²(39.8psi) the oil returns directly to the hydraulic tank, resulting in the oil temperature being raised quickly at an appropriate level.


When the oil cooler is clogged, the oil returns directly to the hydraulic tank through bypass check valve(1).

The full-flow filters are provided by the hydraulic tank.

The oil from right and left side of control valve is combined and filtered by the full-flow filter. A bypass relief valve is provided by the full-flow filter.

When the filter element is clogged, the bypass relief valve opens at 1.05kg/cm²(14.9psi) differential pressure.

3. DRAIN CIRCUIT

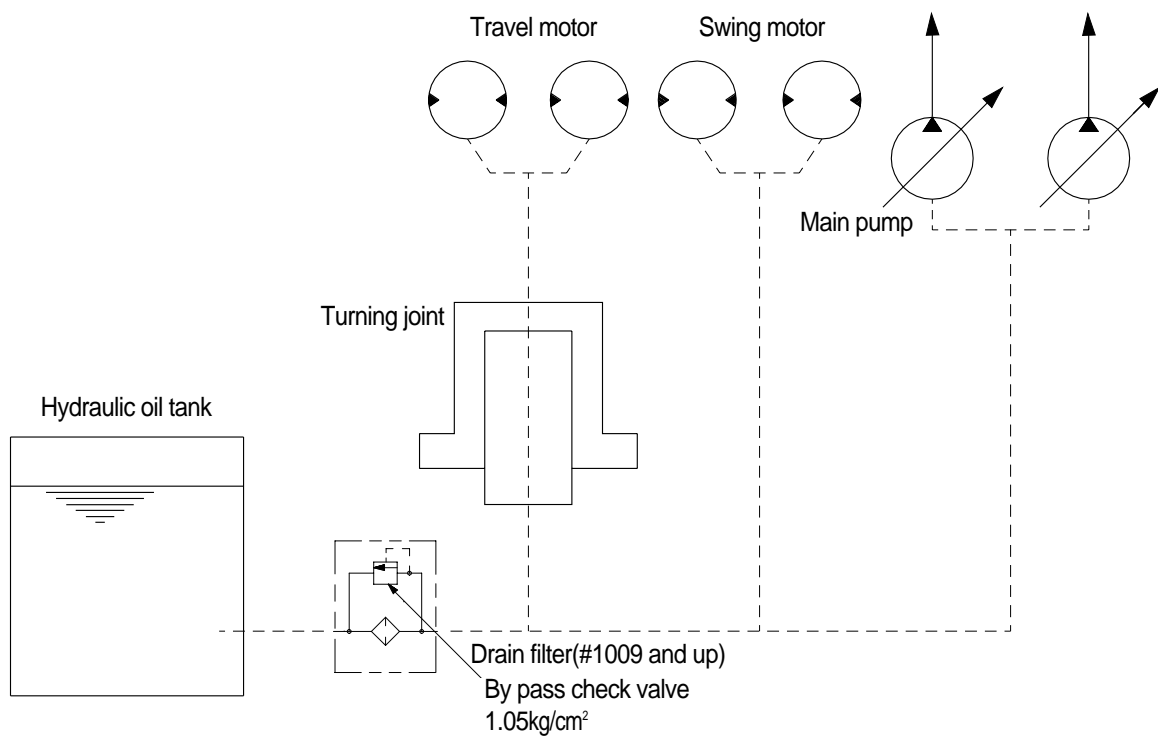

Besides internal leaks from the motors and main pump, the oil for lubrication circulates. These oil have to be fed to the hydraulic tank through drain filter.

When the oil pressure exceeds 1.05kg/cm^2 (14.9psi), the drain oil returns directly to the hydraulic tank through bypass check valve.

1) TRAVEL MOTOR DRAIN CIRCUIT

Oil leaking from the right and left travel motors come out of the drain ports provided in the respective motor casing and join with each other. These oils pass through the turning joint and return to the hydraulic tank through drain filter.

2) SWING MOTOR DRAIN CIRCUIT

Oil leaked from the swing motors come out of the drain ports provided in the motor casing and return to the hydraulic tank through drain filter.

3) MAIN PUMP DRAIN CIRCUIT

Oil leaked from main pump come out and return to the hydraulic tank through drain filter.